

SWITCH FUNCTION			
	POS. 1	POS. 2	POS. 3
			
DN		NONE	(DN)
2-3,5-6		OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4


$$X.XX = \pm 0.25$$

3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
5. FIXED TERM. & MOVING CONTACT

Copper Alloy w/Silver Plate.

6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

▲ 10. SUPPLIED HARDWARE- HEX NUT (2) LOCK RING, AND LOCK WASHER.

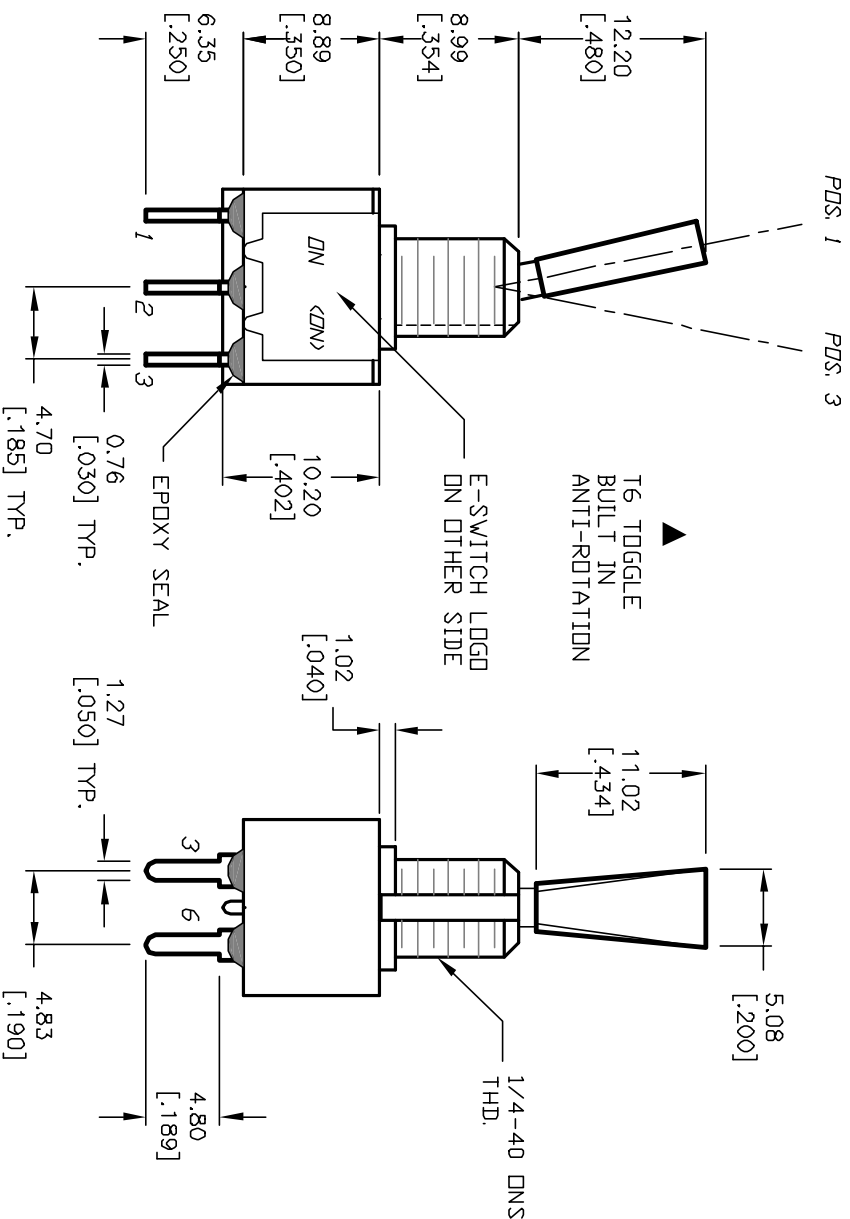

TITLE

100 DP-2 T6 B11 M2 Q E

					TITLE				
					100 DP-2 T6 B11 M2 Q E				
A		12253	RELEASED FOR PRODUCTION	6/19/02	CJB				
REV.	ECN No.	DESCRIPTION			DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									
SCALE		DATE		DR	DWG	REV			
2:1		6/19/02		CJB	T122013	A			