



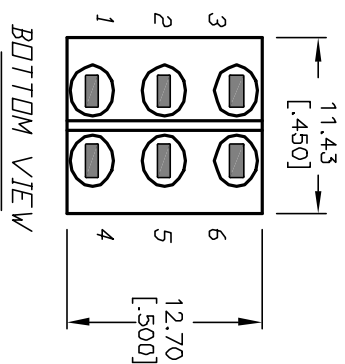

BOTTOM VIEW




$\langle \rangle =$ Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

- Copper Alloy w/Gold plate over Nickel plate.

6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C.
10. SUPPLIED HARDWARE - HEX NUT (2) LOCK RING.

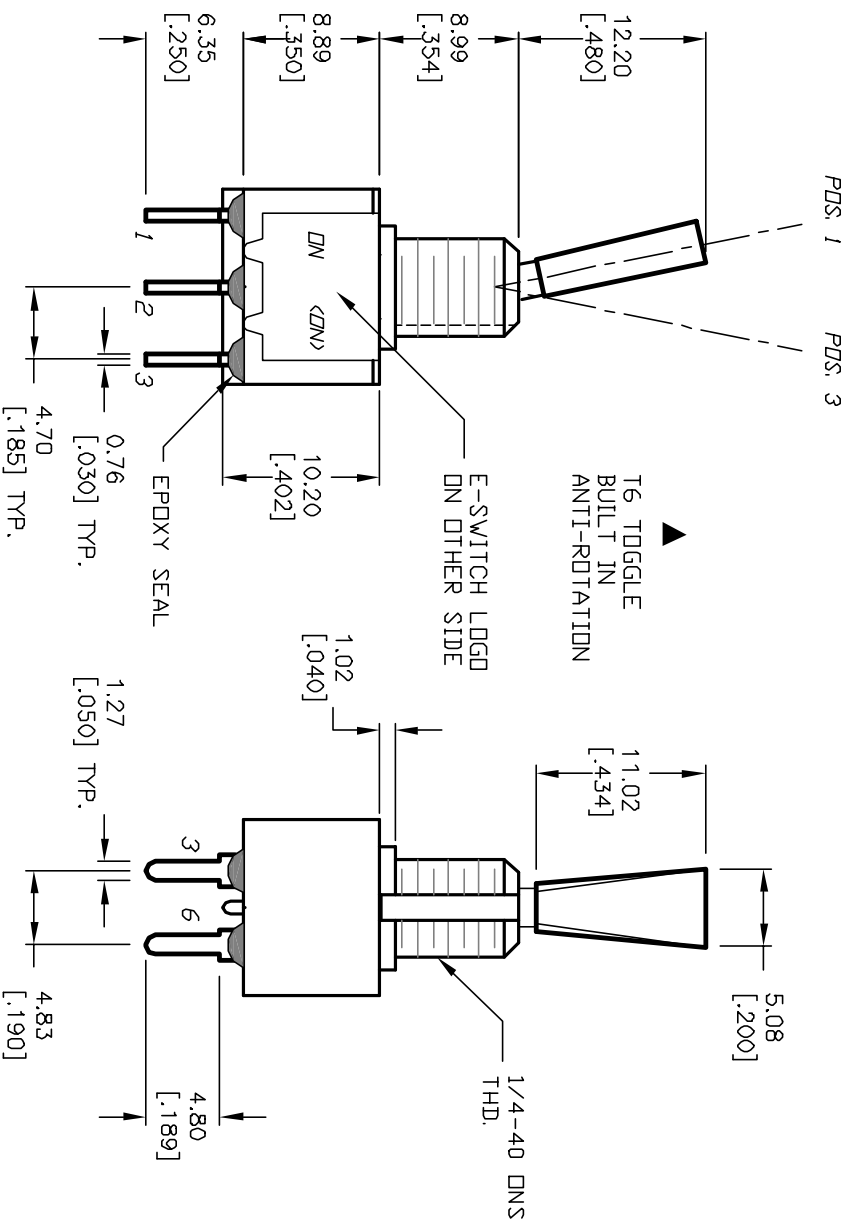

				TITLE			
				100 DP-2 T6 B11 M2 R E			
A	12253	RELEASED FOR PRODUCTION	6/19/02	CJB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE	DR	DWG	REV		
2:1		6/19/02	CJB	T122051	A		