
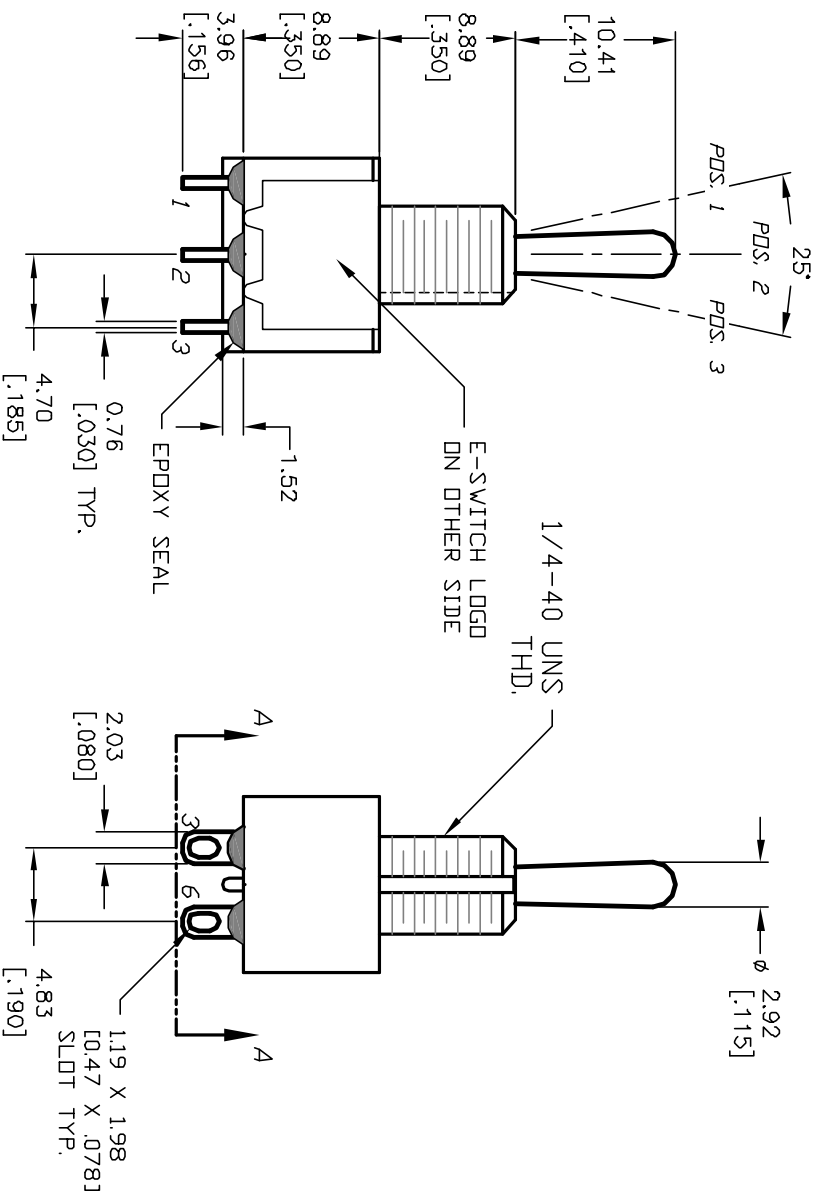
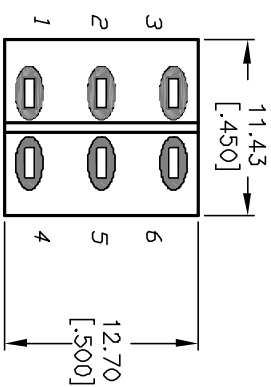


CIRCUIT: DPDT

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
DN	DIFF	DN	
2-3,5-6	DPEN	2-1,5-4	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V ACor DC max.
5. MATERIALS: FIXED TERM. &MOVING CONTACT:
Copper Alloy w/Gold plate over
Nickel plate
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sed level
9. OPERATING TEMP.: -30°C to 85°C

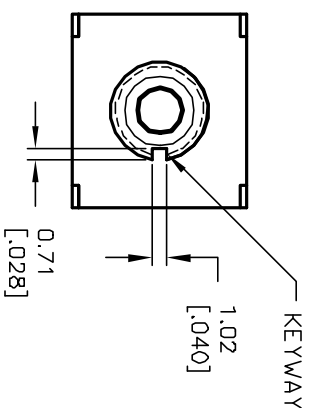

					TITLE				
					100 DP-3 T1 B1 M1 R E (GOLD CONTACTS)				
B		11520	REVISED AND REDRAWN	9/24/02	CJB				
REV.		ECN No.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									
SCALE		DATE		DR		DWG		REV	
2:1		9/25/02		CJB		T123000		B	