


PC MOUNTING





SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4



CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. PLATING MATERIAL: GOLD OVER SILVER
GOLD: 10 MICRO INCH OVER
SILVER: 400 MICRO INCH
5. RATING: 2A@250VDC, 5A@120VDC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHMS MIN
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK
T100011 - LOCK WASHER, QTY-1
T100015 - LOCK RING, QTY-1
T100000 - HEX NUT, QTY-2
12. 2002/95/EC (ROHS) COMPLIANT

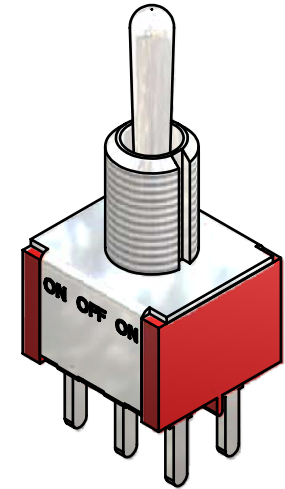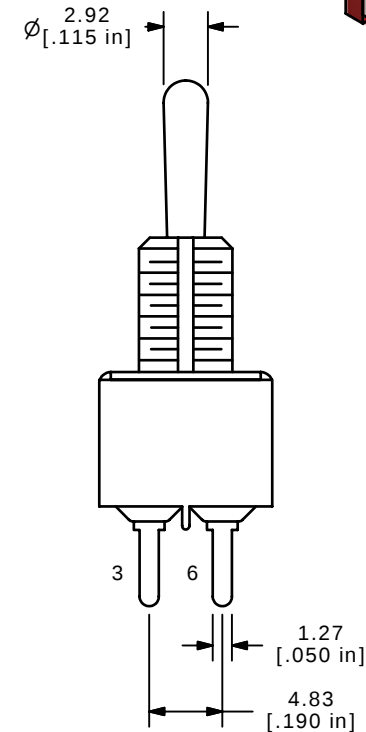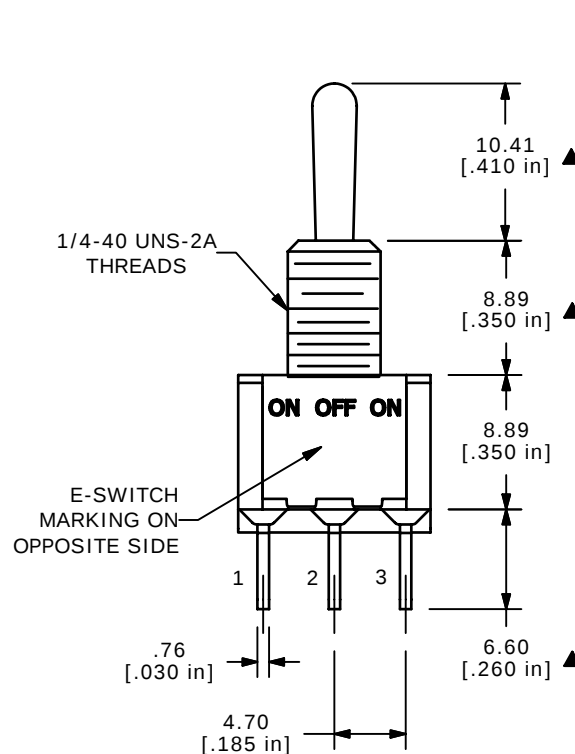

ISOMETRIC



B	17197	TERM CHANGED TO 6.6	4/18/07	TN
A	16790	RELEASED FOR PRODUCTION	12/21/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP3T1B1M2CEH

SCALE 2:1

DATE 4/18/2007

DR TN

DWG ST123502

REV B