


RECOMMENDED P.C.B. LAYOUT
SCALE: 2:1





CIRCUIT: DPDT

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
2-3,5-6		OPEN 2-1,5-4	


() =Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 VOLT-AMPS MAX. @ 20V AC OR DC
5. FIXED TERM. & MOVING CONTACT;
Copper ALLOY W/GOLD PLATE OVER NICKLE PLATE.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -50°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

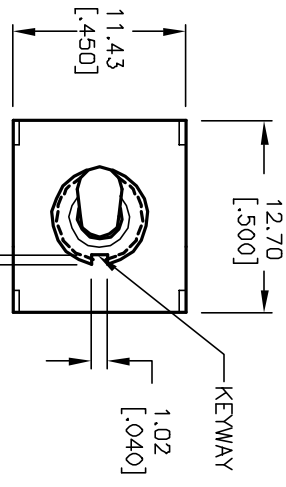

1/4-40 UNS THD.

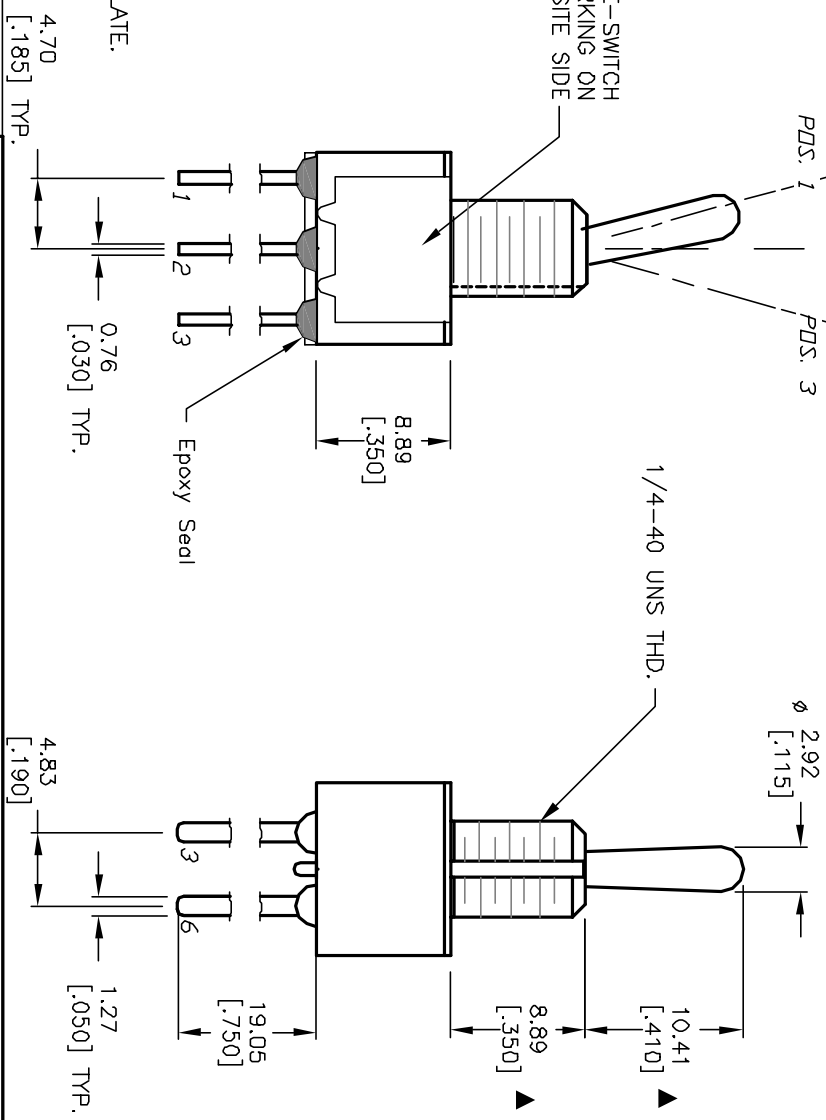

TITLE			
100DP3T1B1M51RE			
E-SWITCH®			
A	13163	RELEASED FOR PRODUCTION	5/28/03
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		2:1	DATE
		5/28/03	DR
		AR	DWG
		T123003	REV
		A	