



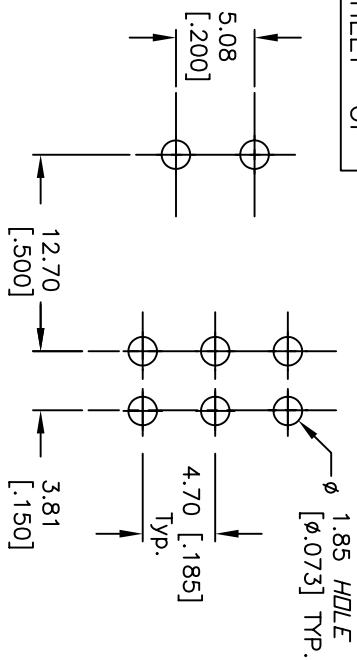

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DN	DN
DN	DN	DN
2-3,5-6	DPEN	2-1,5-4

NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) Max. @20V Max. (AC OR DC)
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy W/GOLD plate.
6. ELECTRICAL LIFE: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sed level.
9. OPERATING TEMP.: -30°C to +85°C.
10. 2002/95/EC (ROHS) COMPLIANT

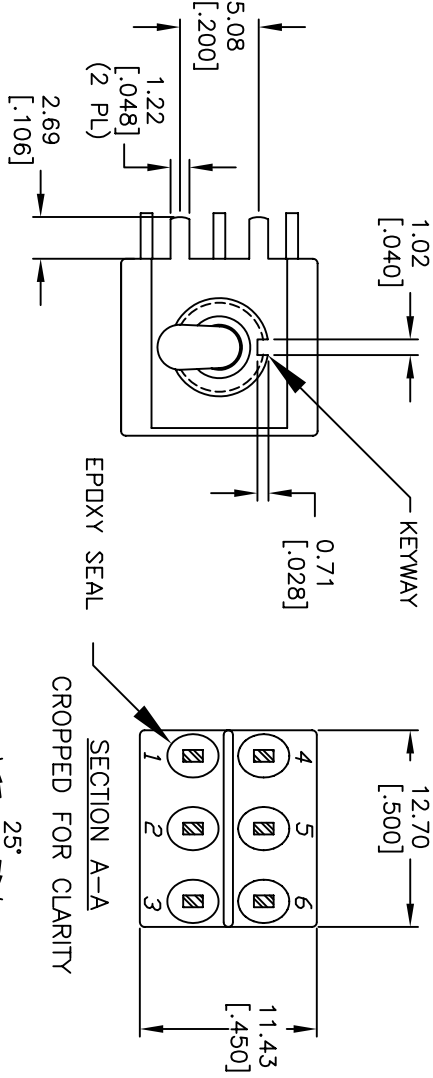

EPOXY SEAL

SECTION A-A

CROPPED FOR CLARITY

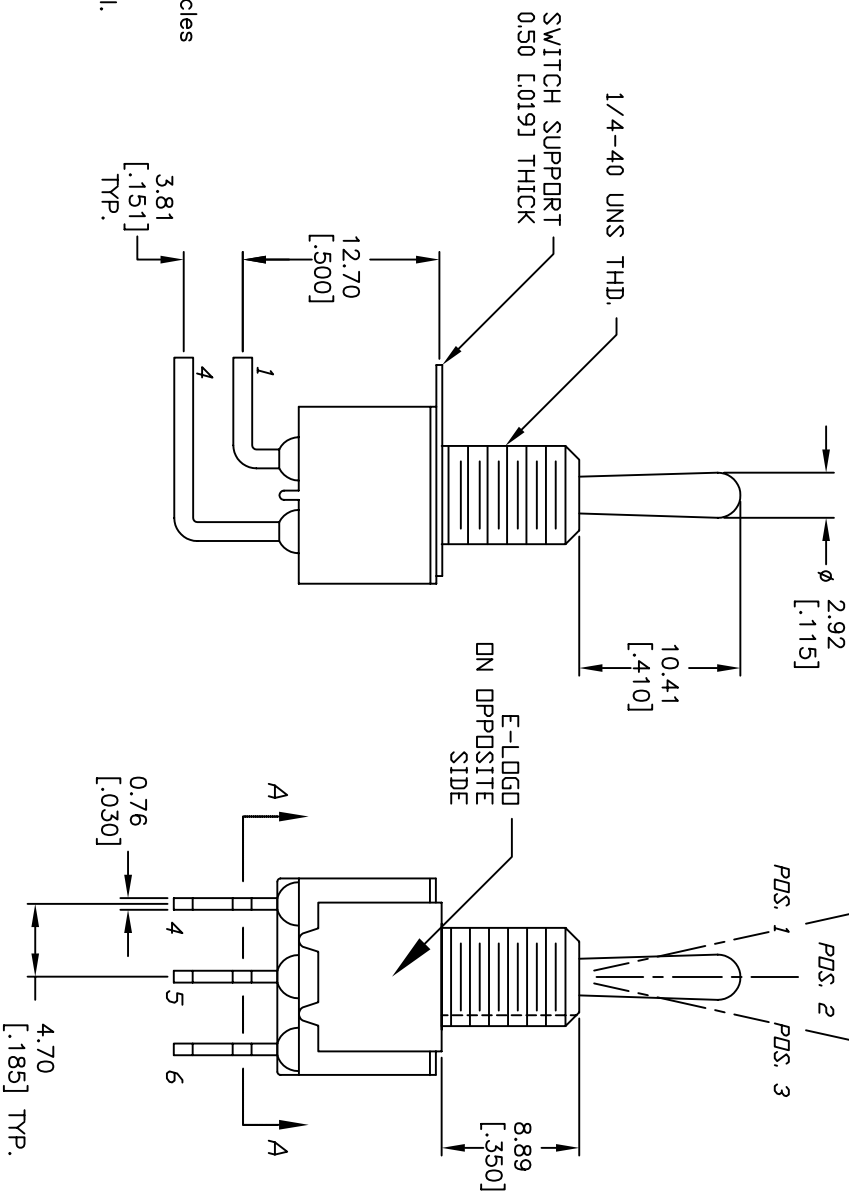

E-LOGO
DN OPPOSITE
SIDE

C	17241	FIXED CONTACT MATERIAL	5/1/07	TN
B	12004	REVISED PART DESCRIPTION	3/20/02	CJB
A	11855	RELEASED FOR PRODUCTION	3/6/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
TITLE				
100DP3T1B1M6RE				
SCALE	DATE	DR	DWG	REV
2:1	5/1/07	TN	T123015	C

