

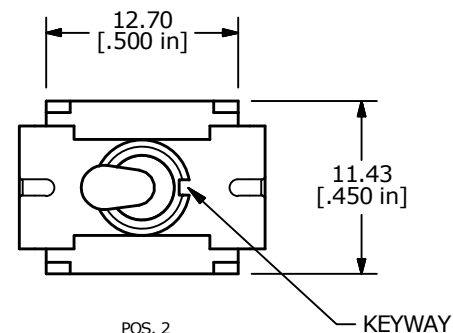


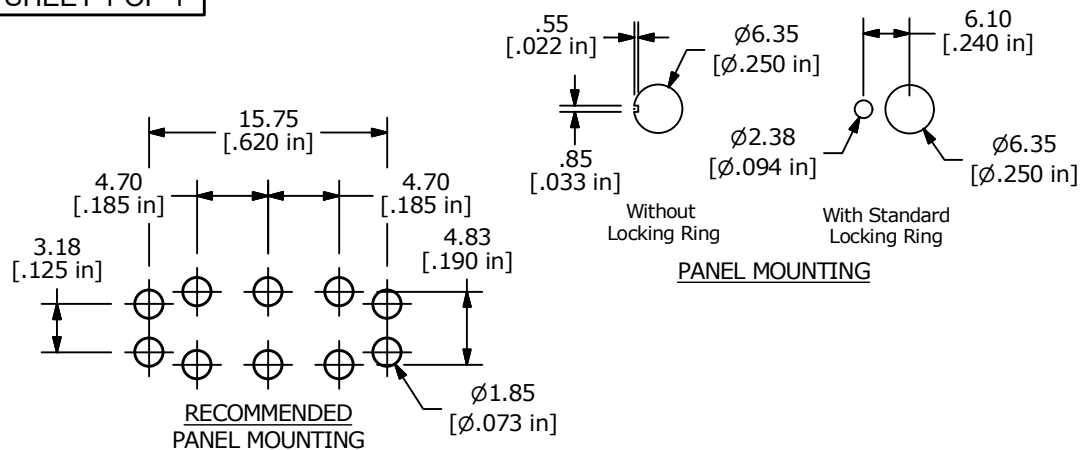

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4





CIRCUIT: DPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
- TERM. NUMBERS FOR REFERENCE ONLY
- RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
- FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/SLIVER PLATE OVER NICKEL PLATE
- ELECTRICAL LIFE:
40,000 MAKE-AND BREAK CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000M OHM MIN.
- DIELECTRIC STRENGTH: 1000V RMS @ SEA LEVEL
- OPERATING TEMP: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER
- CONTACT MATERIAL: SILVER

E-SWITCH LOGO
ON OTHER SIDE

EPOXY SEAL

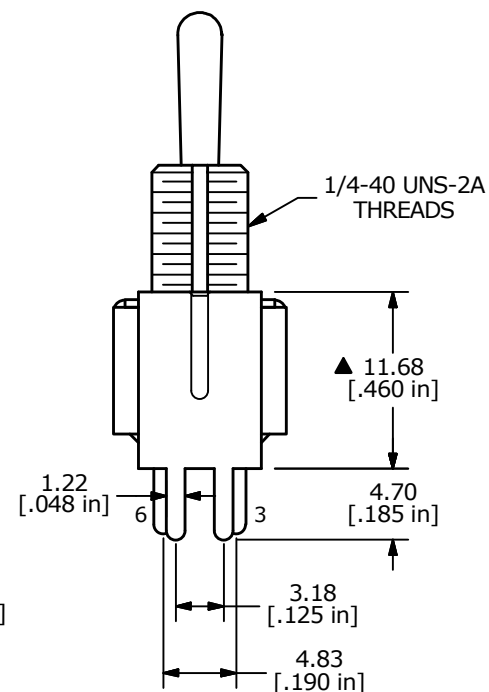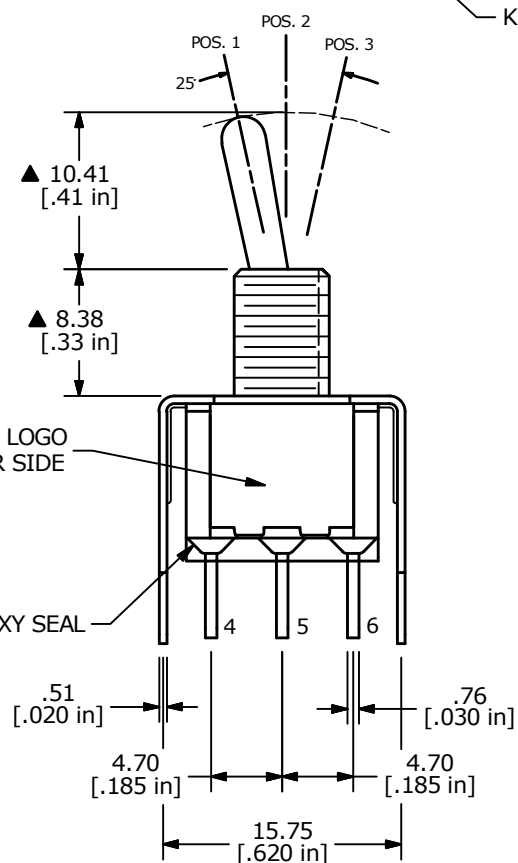

B	23956	remove hardware note	7/2/19	MW
A	23952	RELEASE	6/27/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE 100DP3T1B1VS2QE

SCALE 2:1

DATE 6/27/2019

DR MW

DWG T123064

REV B