



RECOMMEND P.C.B. LAYOUT


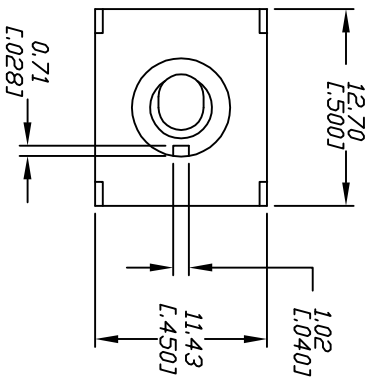


CIRCUIT, DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	OFF	DN	
2-3,5-6	DPEN	2-1,5-4	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X±0.4, X.XX±0.25
3. TERM. NOS. FOR REF ONLY
4. RATING: 5A @120VAC OR 28VDC; 2A @250VAC
5. ELECTRICAL LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
6. INSUL. RESISTANCE: 1,000 MEGA-OHM MIN
7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
8. OPERATING TEMP: -30°C TO +85°C

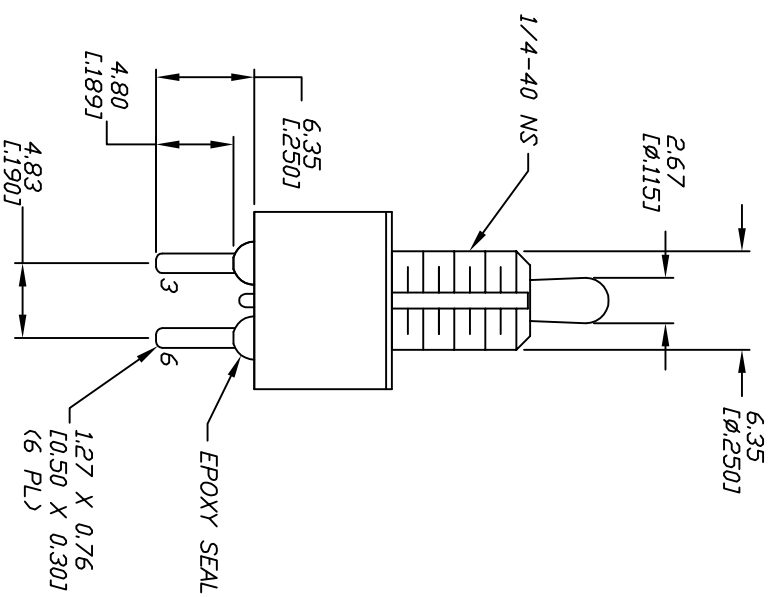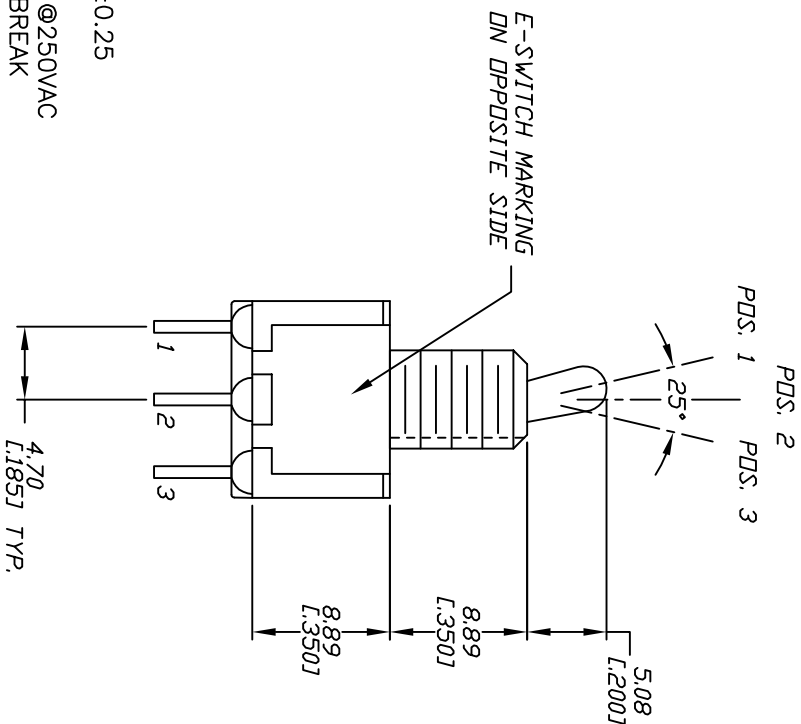

TITLE			
100 DP-3 T2 B1 M2 Q E			
REV.	ECN No.	DESCRIPTION	DATE
A	11053	RELEASED FOR PRODUCTION	11/13/00
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
2:1	11/13/00	PML	T124014
REV A			