



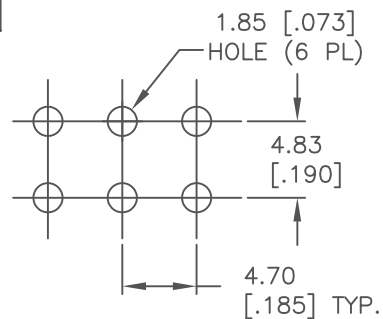

RECOMMEND P.C.B. LAYOUT





CIRCUIT: DPDT



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
- ▲ 5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
- ▲ 10. SUPPLIED HARDWARE- HEX NUT (2) LOCK RING,
AND LOCK WASHER.

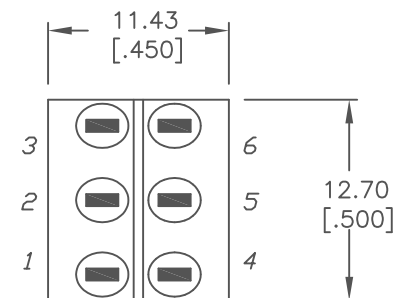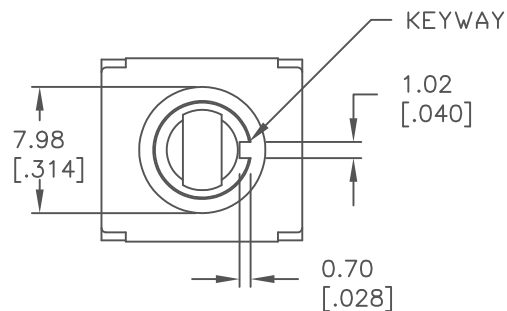

BOTTOM VIEW

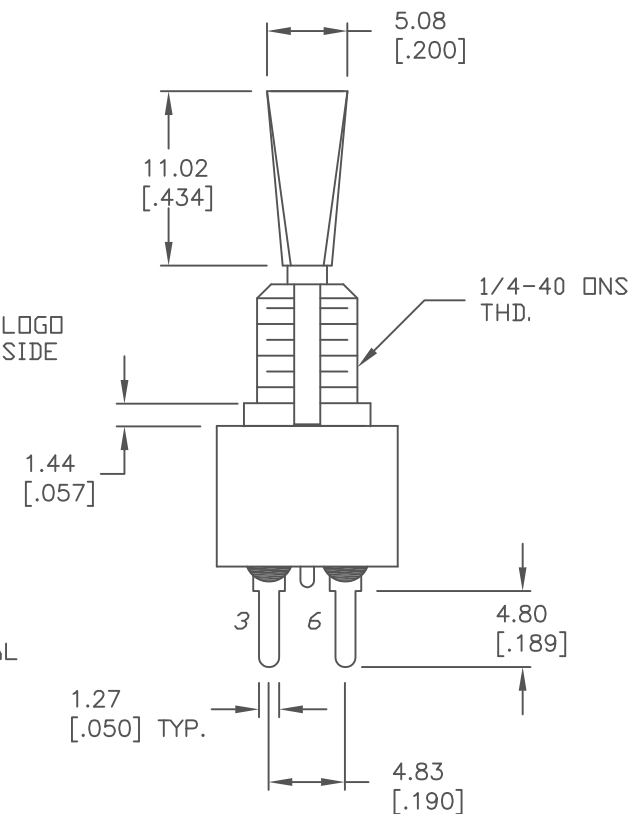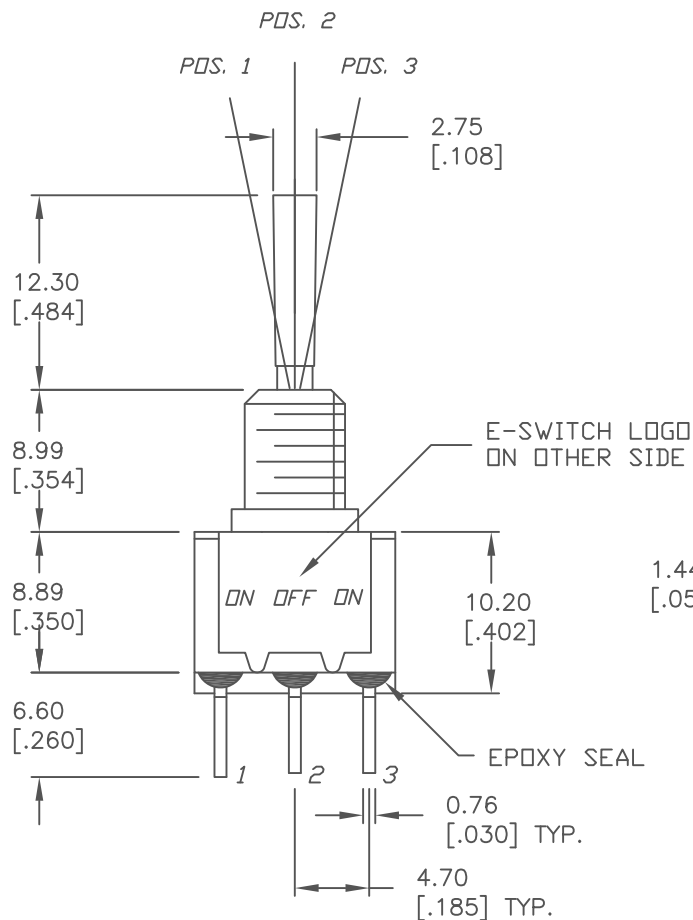

E-SWITCH®

TITLE

100 DP-3 T6 B11 M2 Q E

SCALE

2:1

DATE

8/3/01

DR

CJB

DWG

T123036

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

B	21645	FIXED DIMENSIONS	10/20/14	AS
A	11596	RELEASED FOR PRODUCTION	8/3/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD