



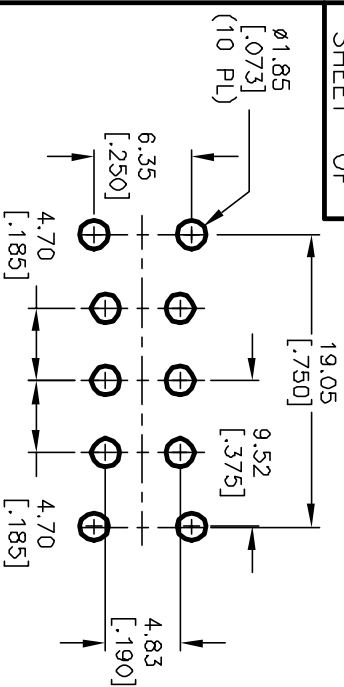

RECOMMENDED PANEL MOUNTING



CIRCUIT: DPDT




SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	DIFF	DN
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC OR DC max.
5. FIXED TERM. & MOVING CONTACT:

Copper Alloy w/GOLD Plate over Nickel plate.

6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

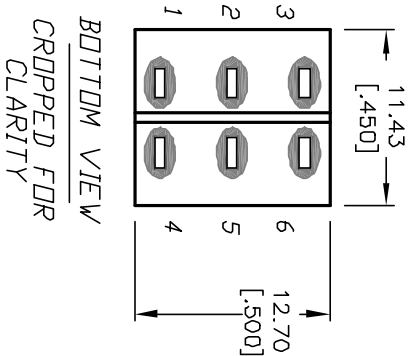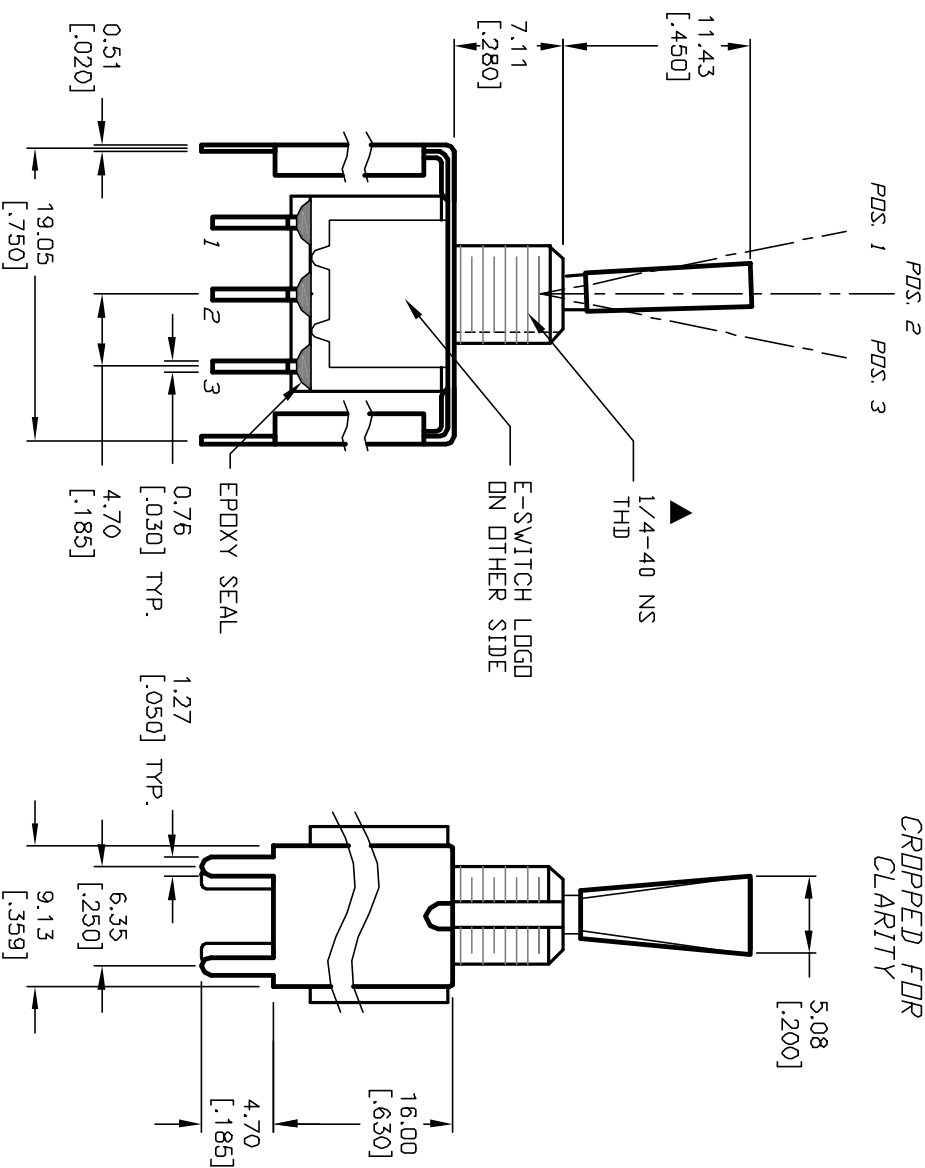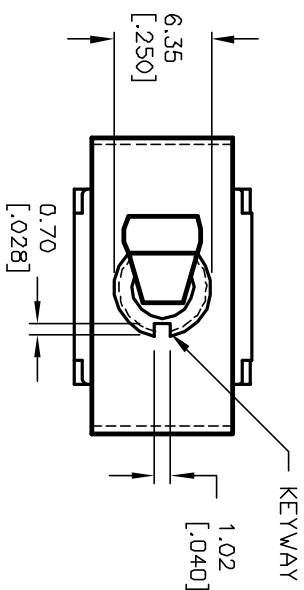

9. OPERATING TEMP.: -30°C to 85°C 8. DIELECTRIC STRENGTH: 1000V RMS (used level) 7. DIELECTRIC STRENGTH: 1000V RMS (used level)			
A	12466	RELEASED FOR PRODUCTION	10/7/02 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			

E-SWITCH®			
TITLE 100 DP-3 T6 B11 VSS R E (GOLD CONTACTS)			
SCALE	DATE	DR	DWG
2:1	10/7/02	CJB	T123062
			REV A