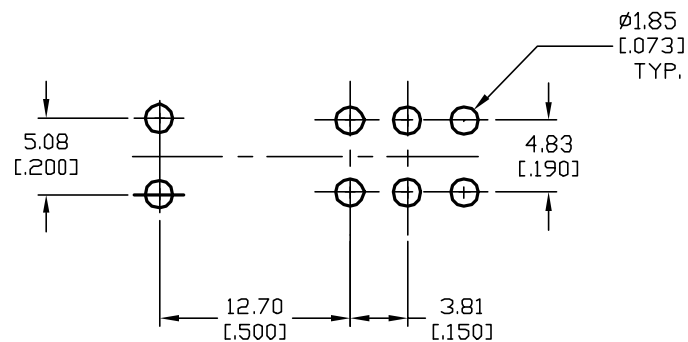





RECOMMENDED P.C.B. LAYOUT


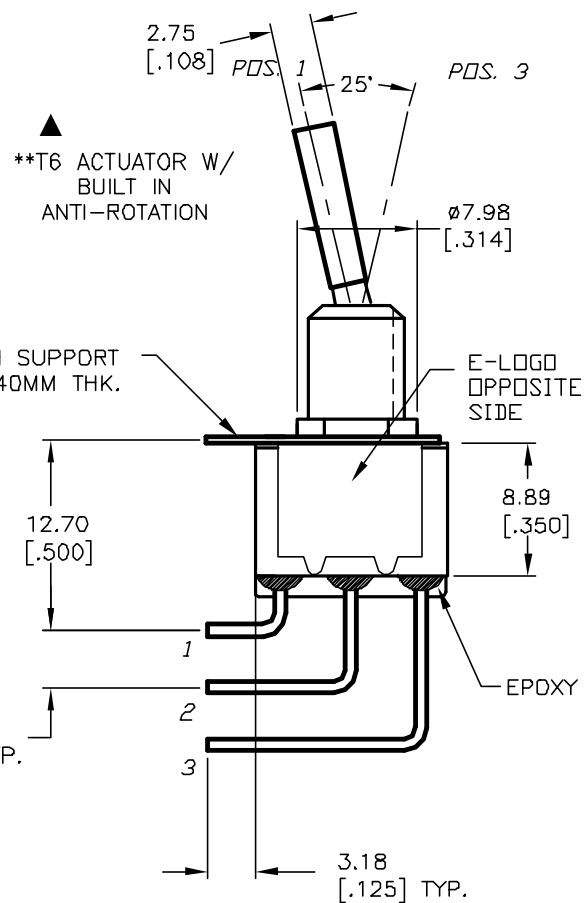
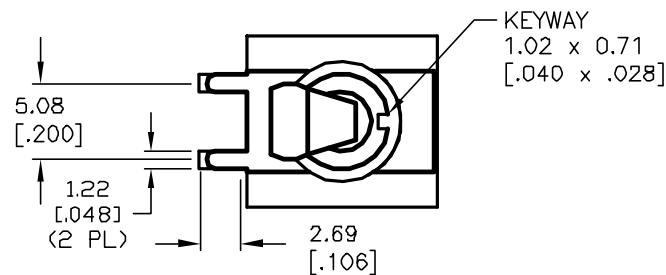
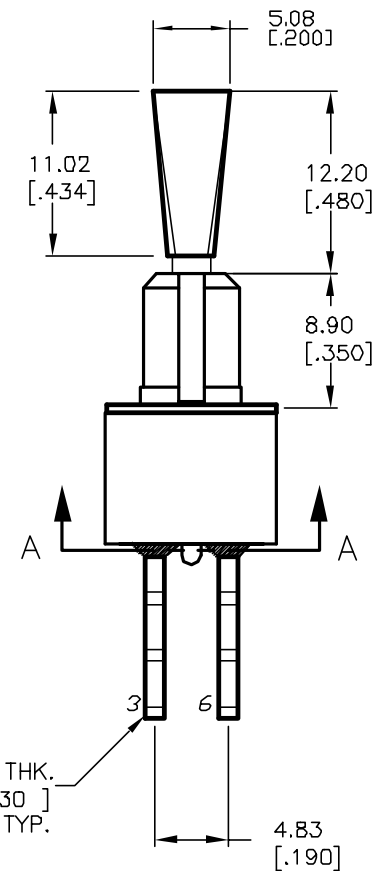


CIRCUIT: 2PDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
- ▲ 5. FIXED TERM. & MOVING CONTACT: Cu Alloy w/GOLD plate over NI plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

SECTION A-A
CROPPED FOR CLARITY1.27 X 0.76 THK.
[0.050 X .030]
TYP.**E-SWITCH®**

A	12018	RELEASED FOR PRODUCTION	3/26/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

100 DP-3 T6 B12 M7 R E (GOLD CONTACTS)

SCALE

2:1

DATE

3/26/02

DR

CB

DWG

T123027

REV

A