


P.C. MOUNTING

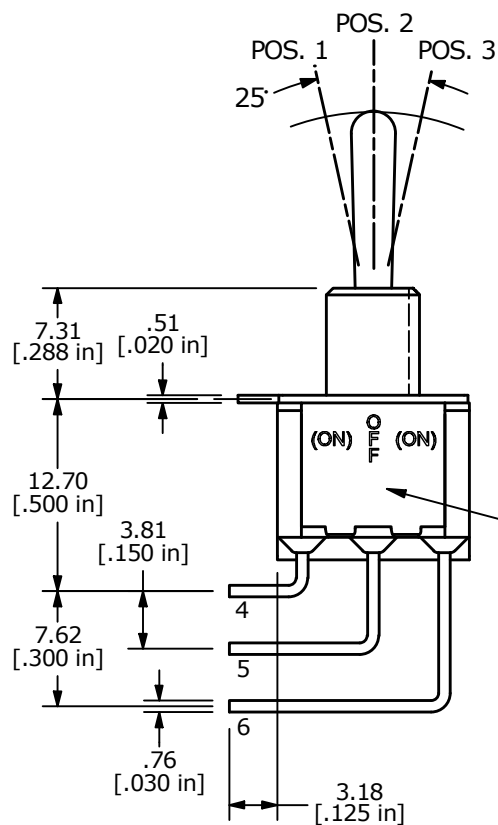

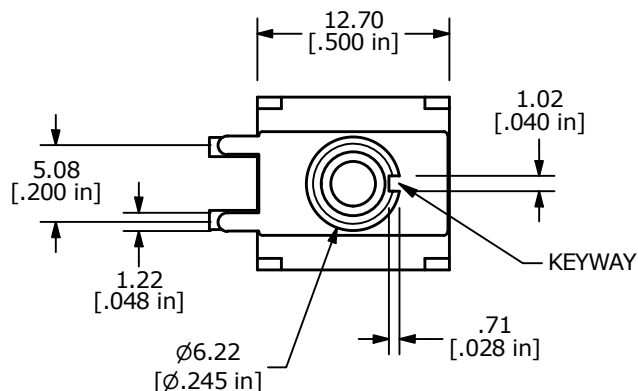
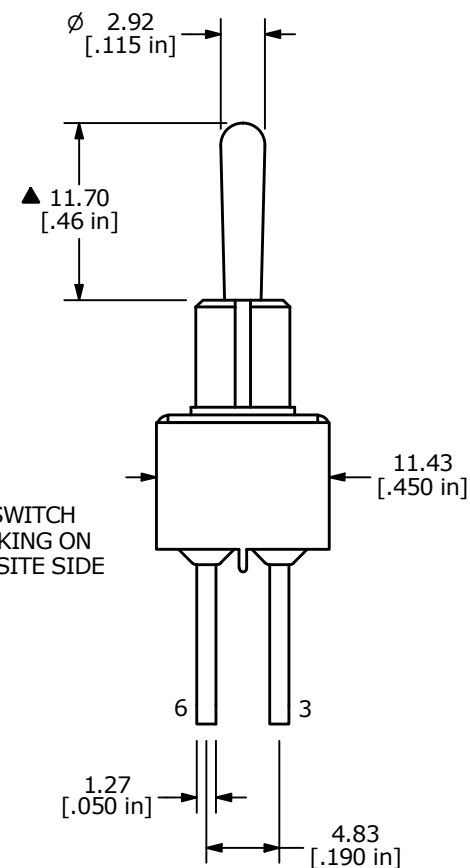
▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3, 5-6	OPEN	2-1, 5-4



CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @ 250VAC
5 AMPS @ 120VAC or 28VDC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load
7. CONTACT RESISTANCE: 10 m Ω MAX. @ 2-4VDC
8. INSULATION RESISTANCE: 1,000 M Ω MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH
MARKING ON
OPPOSITE SIDE

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			
A	ECO-100033	RELEASE	04/15/21	MW	TITLE 100DP4T1B4M7QE			
					SCALE 2:1	DATE 4/13/2021	DR MW	DWG T121155
					REV A			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED