




CIRCUIT: DPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	OFF	<DN>	
2-3,5-6	OPEN	2-1,5-4	

(<)=MENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NDS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/GOLD PLATE over
NICKEL PLATE.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sed level
9. OPERATING TEMP.: -30°C to 85°C

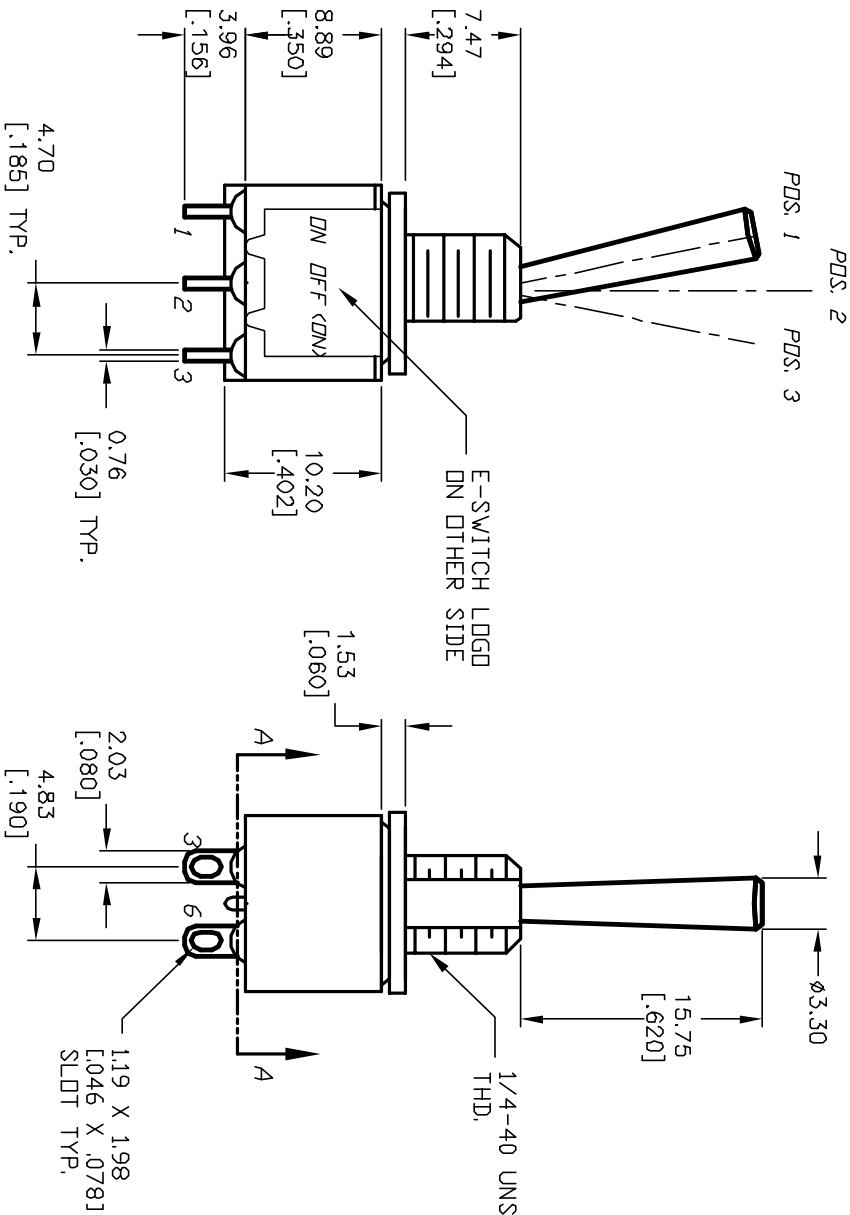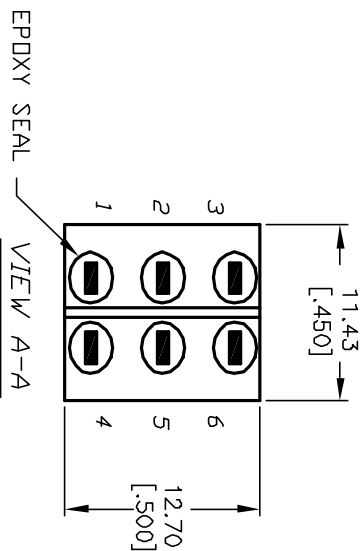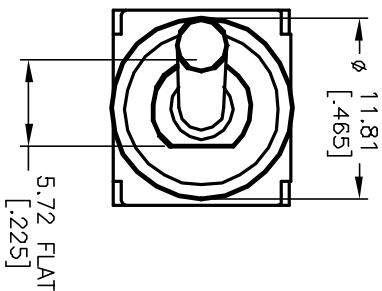

TITLE		SCALE		DATE		DR		DWG		REV	
100 DP-5 T3 B9 M1 R E <GOLD CONTACTS>		2:1		4/15/02		CB		T125013		A	
RELEASED FOR PRODUCTION		8/3/01		DATE		CHKD		CJB		A	
DESCRIPTION		12058		ECN No.		REV.		A		A	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											

E-SWITCH®