


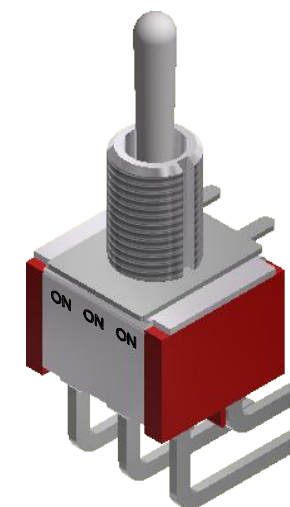


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	ON	ON
2-3, 5-6	2-3, 5-4	2-1, 5-4

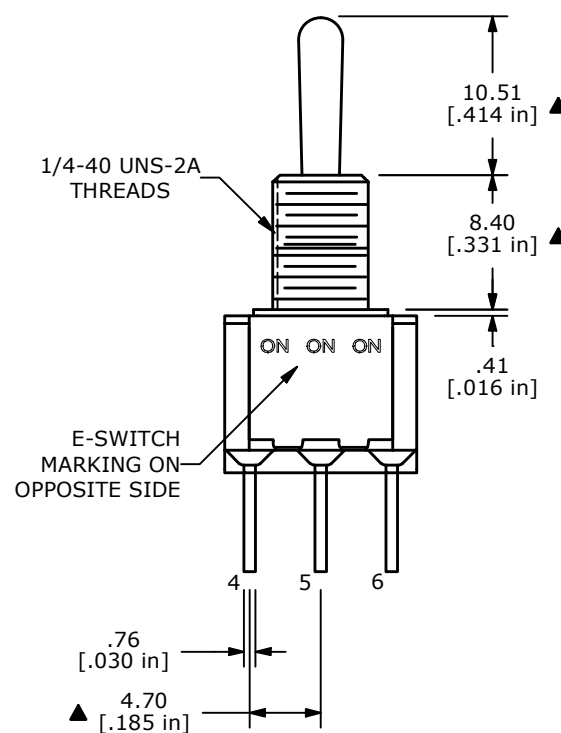


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS W/RESISTIVE LOAD @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

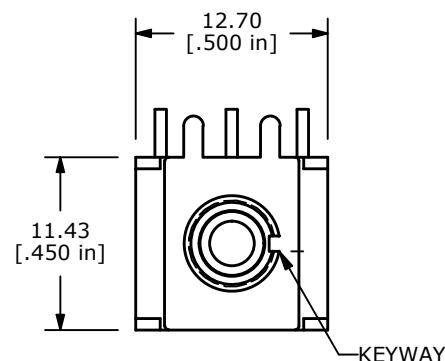

ISOMETRIC

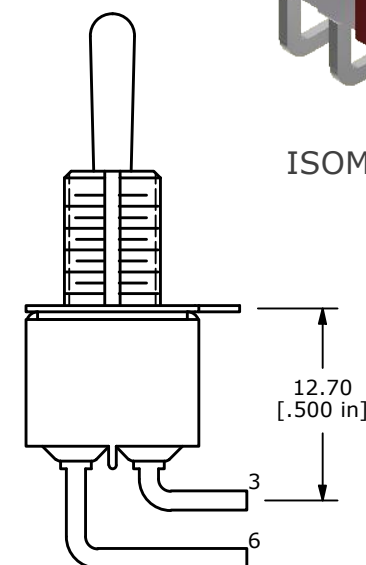

C	17245	FIXED DRAWING, DIMS	5/2/07	TN
B	13796	CORRECT ACTUATOR LENGTH	2/24/04	TN
A	13769	RELEASED FOR PRODUCTION	2/13/04	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
000024359

TITLE 100DP6T1B1M6QE

SCALE
2:1

DATE
5/2/2007

DR
TN

DWG
T126006

REV
C