

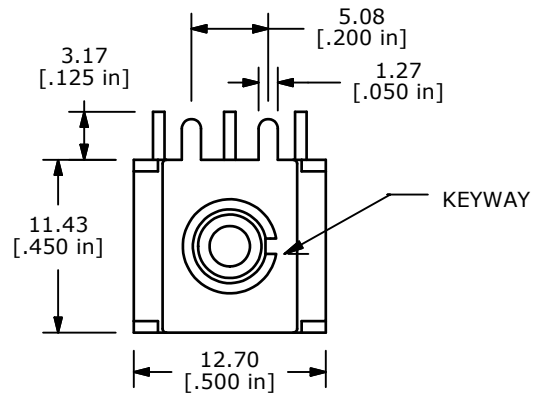

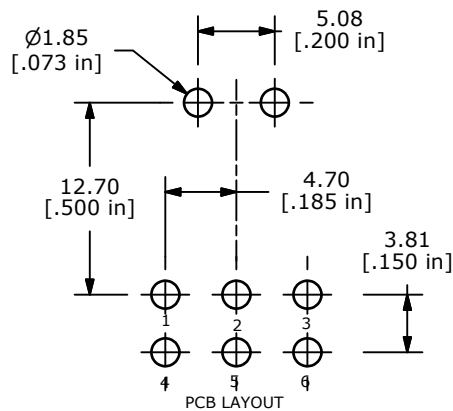
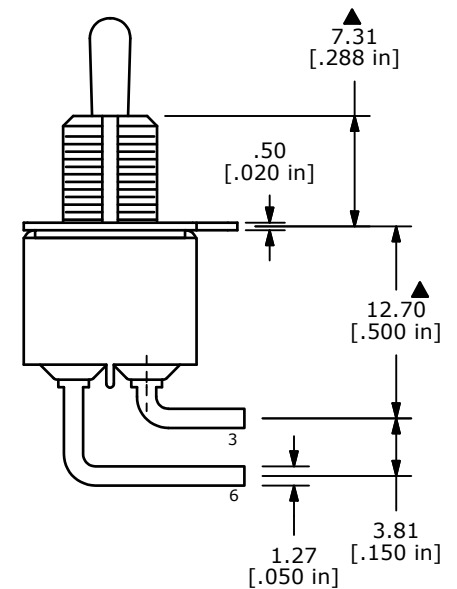


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	ON	ON
2-3, 5-6	2-3, 5-4	2-1, 5-4

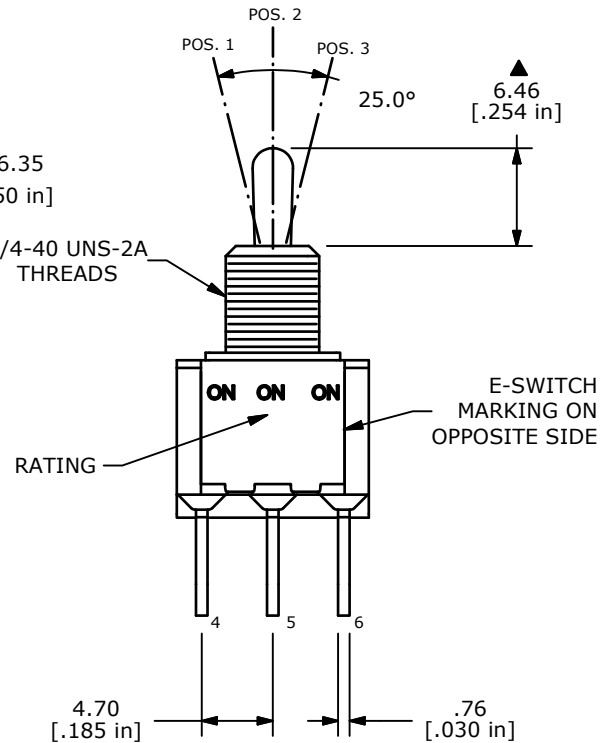

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 VA @ 20V max. (AC OR DC)
6. LIFE EXPECTANCY: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. CONTACT RESISTANCE: 10 MILLI-OHMS MAX.
9. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT

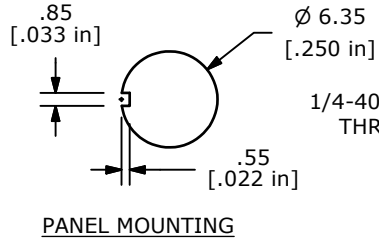

A	19808	RELEASED FOR PRODUCTION	4/8/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP6T2B3M6RE				
SCALE 2:1	DATE 4/7/2011	DR BGL	DWG T126024	REV A