
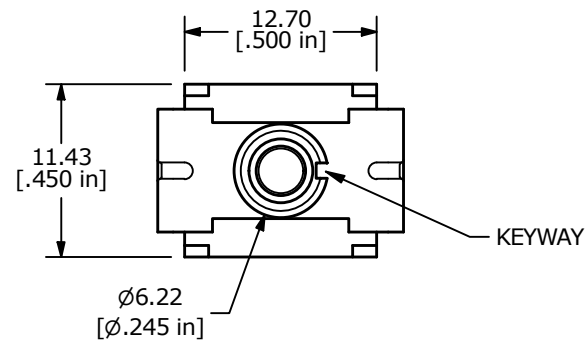
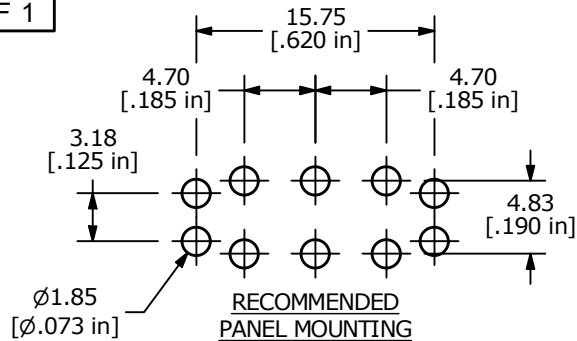




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	ON	ON
2-3, 5-6	2-3, 5-4	2-1, 5-4

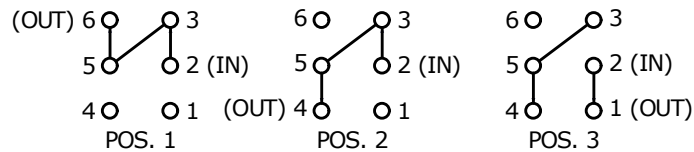

DPDT 3 WAY CIRCUIT
 NOTE: JUMPER PIN 3 TO 5

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
- TERM. NUMBERS FOR REFERENCE ONLY
- ▲ PLATING MATERIAL: SILVER
- RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
- ELECTRICAL LIFE: 40,000 MAKE-AND BREAK CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000M OHM MIN.
- DIELECTRIC STRENGTH: 1000V RMS @ SEA LEVEL
- OPERATING TEMP: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER

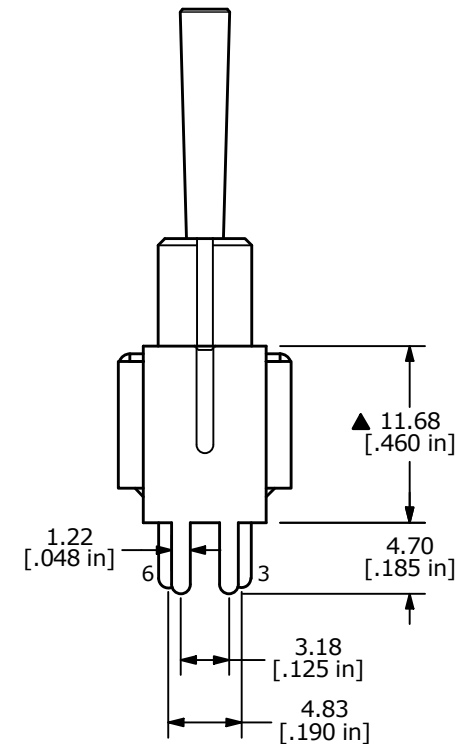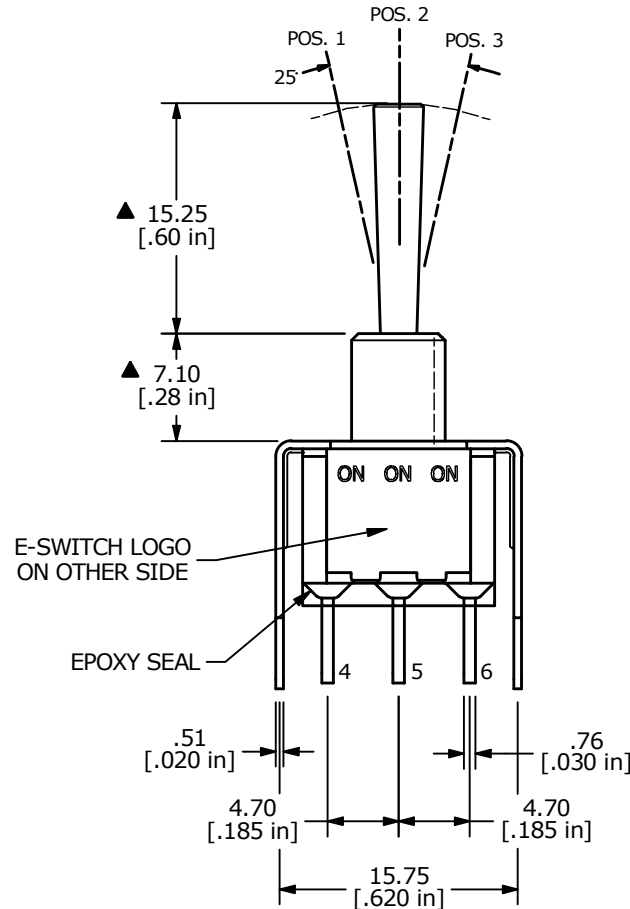

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100397	Release	10/11/21	MW	TITLE 100DP6T3B4VS2QE				100119127
					SCALE	DATE	DR	DWG	REV
					2:1	10/1/2021	MW	T126038	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
 E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED