
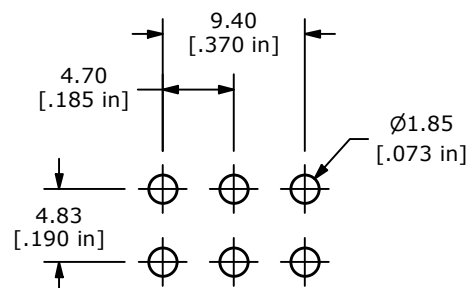
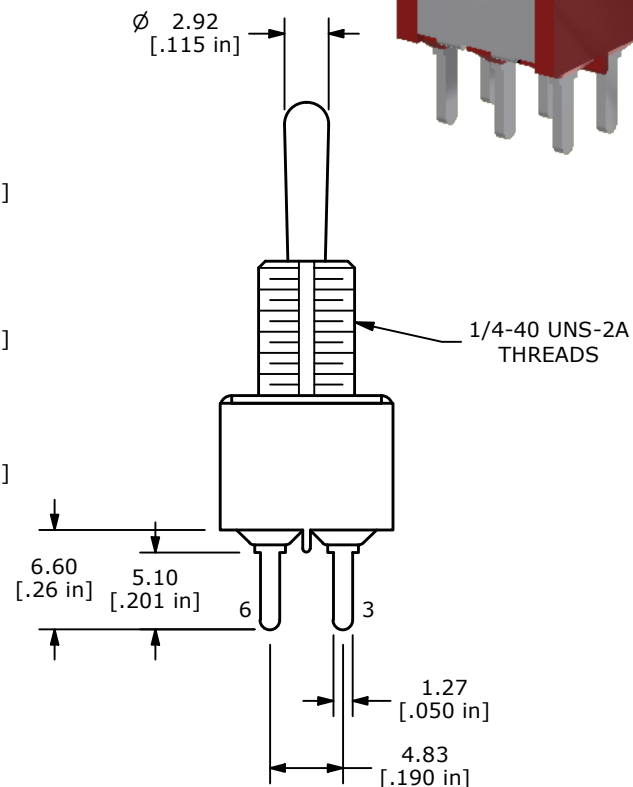
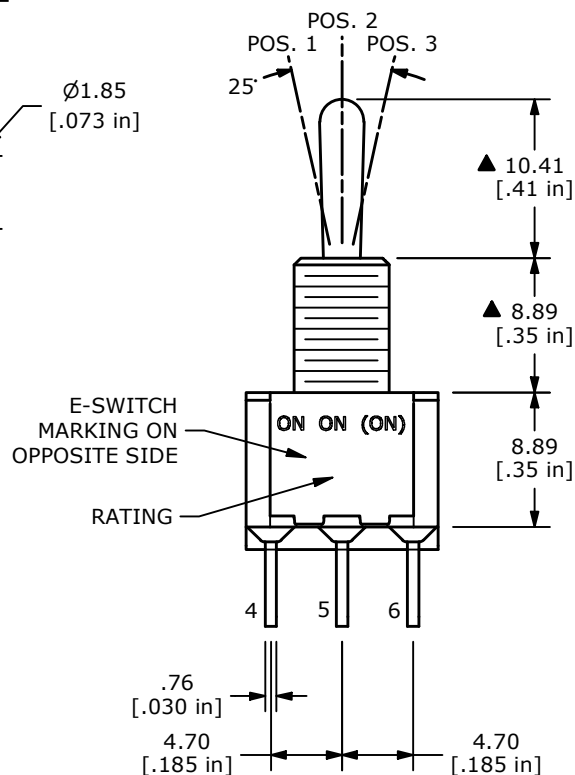
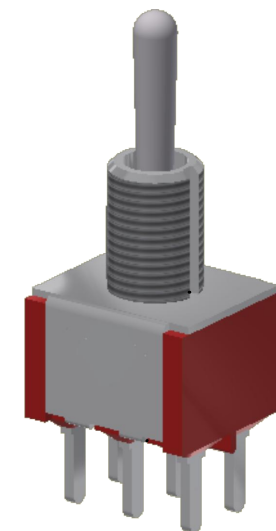
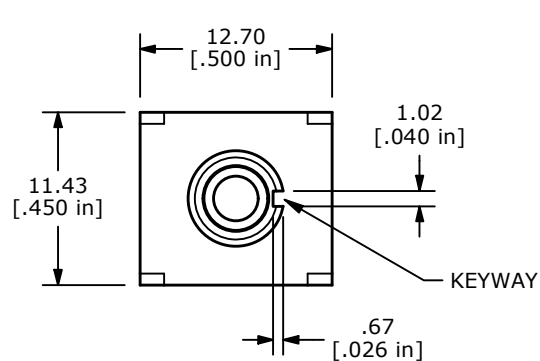
**PANEL MOUNTING**

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	ON	(ON)
2-3, 5-6	2-3, 5-4	(2-1, 5-4)

() = MOMENTARY

**CIRCUIT: DPDT****P.C. MOUNTING****NOTE:**

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ PLATING MATERIAL: SILVER
5. RATING: 5AMPS W/RESISTIVE LOAD @120VAC OR 28VDC
2AMPS W/RESISTIVE LOAD @250VAC
6. ELECTRICAL LIFE: 6,000 make-and-break cycles at full load
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level
9. OPERATING TEMP.: -40°C to 85°C
- ▲ 10. HARDWARE SUPPLIED: T100011 - LOCK WASHER, QTY 1
T100015 - LOCK RING, QTY 1
T100000 - HEX NUT, QTY 2

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103510	Print update	07/02/25	MW	TITLE 100DP7T1B1M2QEH				000023214
					SCALE 2:1	DATE 8/5/2016	DR MW	DWG ST128089	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED