







| SWITCH FUNCTION                                                                   |                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| POS. 1                                                                            | POS. 2                                                                            | POS. 3                                                                            |
|  |  |  |
| ON                                                                                | ON                                                                                | (ON)                                                                              |
| 2-3, 5-6                                                                          | 2-3,5-4                                                                           | 2-1, 5-4                                                                          |

(ON) = MOMENTARY

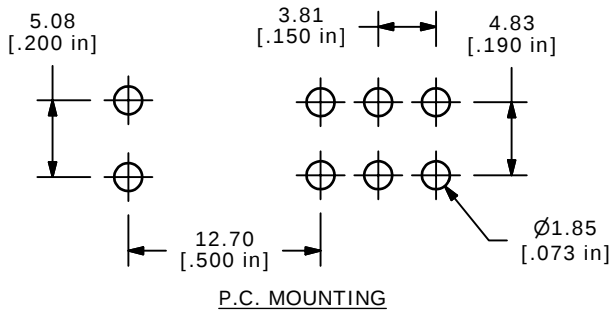

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC  
2 AMPS W/RESISTIVE LOAD @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT.

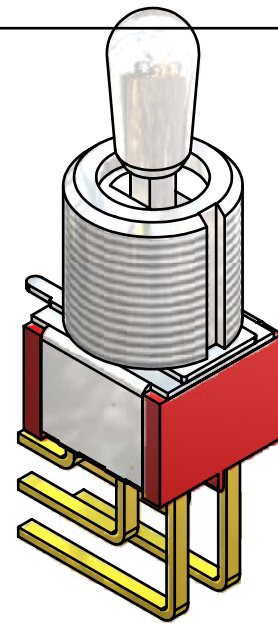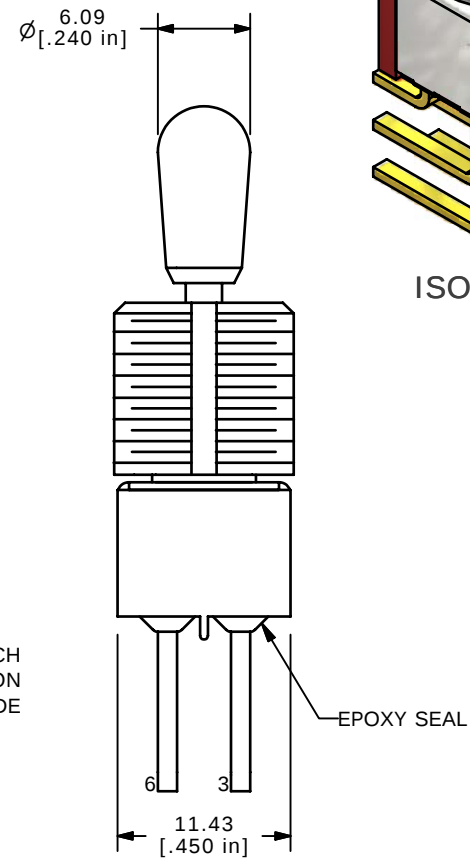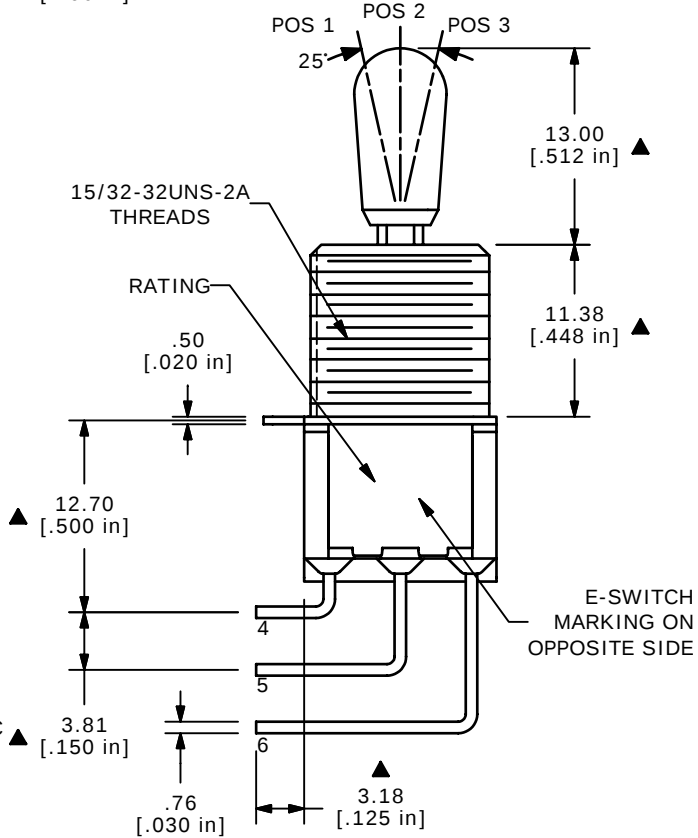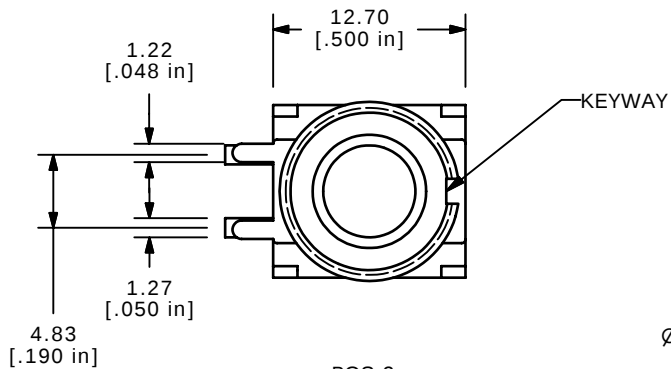

## ISOMETRIC

|     |        |                         |            |    |
|-----|--------|-------------------------|------------|----|
| B   | 16810  | FIXED SWITCH FUNCTION   | 12/29/06   | TN |
| A   | 16585  | RELEASED FOR PRODUCTION | 10/30/2006 | TN |
| REV | PCR NO | DESCRIPTION             | DATE       | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

**E-SWITCH®**

TITLE 100DP7T7B13M7QE

SCALE 2:1

DATE 12/29/2006

|    |
|----|
| DR |
| TN |

DWG T128085

REV  
B