

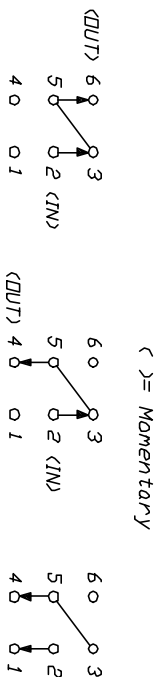
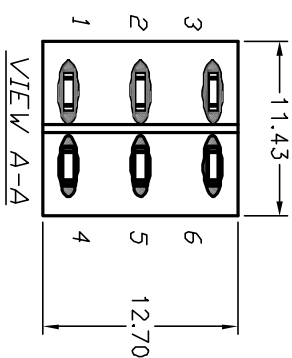


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	DN	<DN>
2-3,5-6	2-3,5-4	2-1,5-4

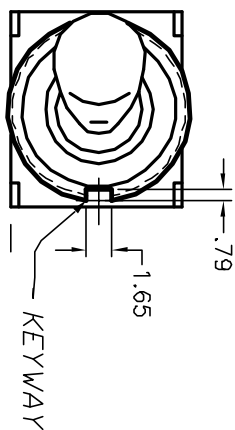

CIRCUIT: DPDT 3-WAY

NOTE: JUMPER PIN 3 TO PIN 5

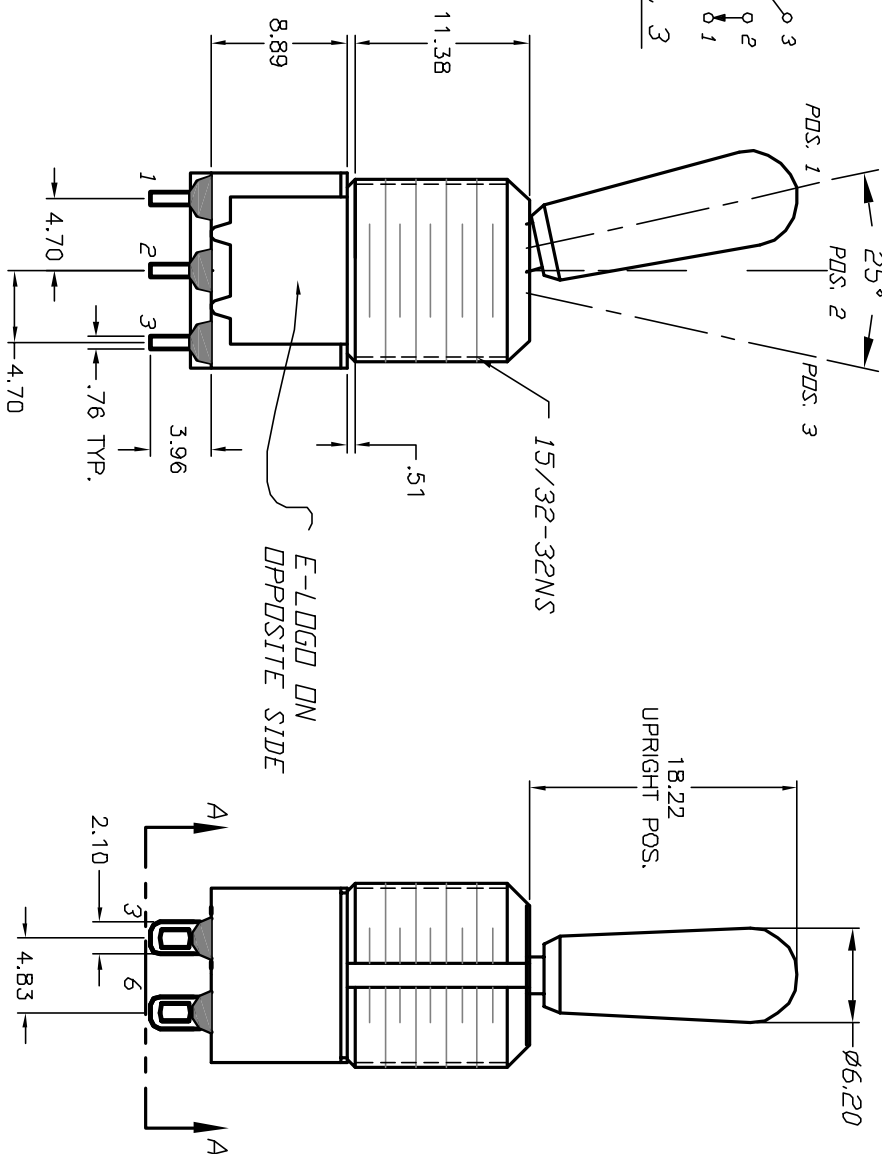

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4V @20V AC or DC
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY w/Gold plate over
Nickel plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

9. OPERATING TEMP.: -30°C to +85°C			
B	12840	RELEASED	2/26/03 CB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE		E-SWITCH®	
100 DP-7 T8 B13 M1 R E			
SCALE	DATE	DR	DATE
2:1	2/26/03	CB	7128065
		DATE	REV
			A