





SWITCH FUNCTION		
POS. 1	POS. 1	POS. 1
		
(ON) ^B	ON	(ON) ^B
2-3, 5-6	2-1, 5-6	2-1, 5-4
		

^B (ON) = MOMENTARY

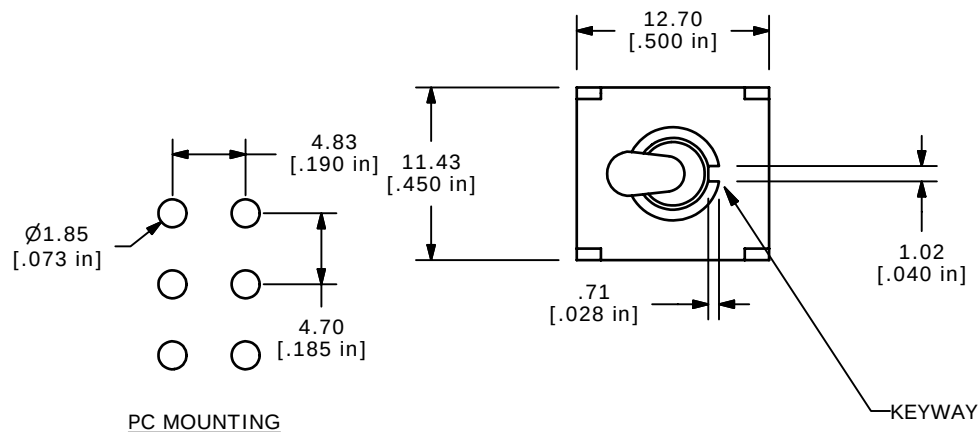


ISOMETRIC

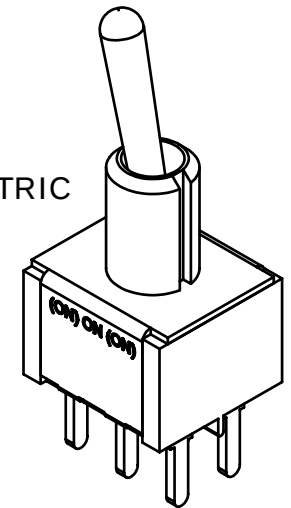

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ PLATING MATERIAL: SILVER
- RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS W/RESISTIVE LOAD @ 250VAC
- ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EE (ROHS) COMPLIANT

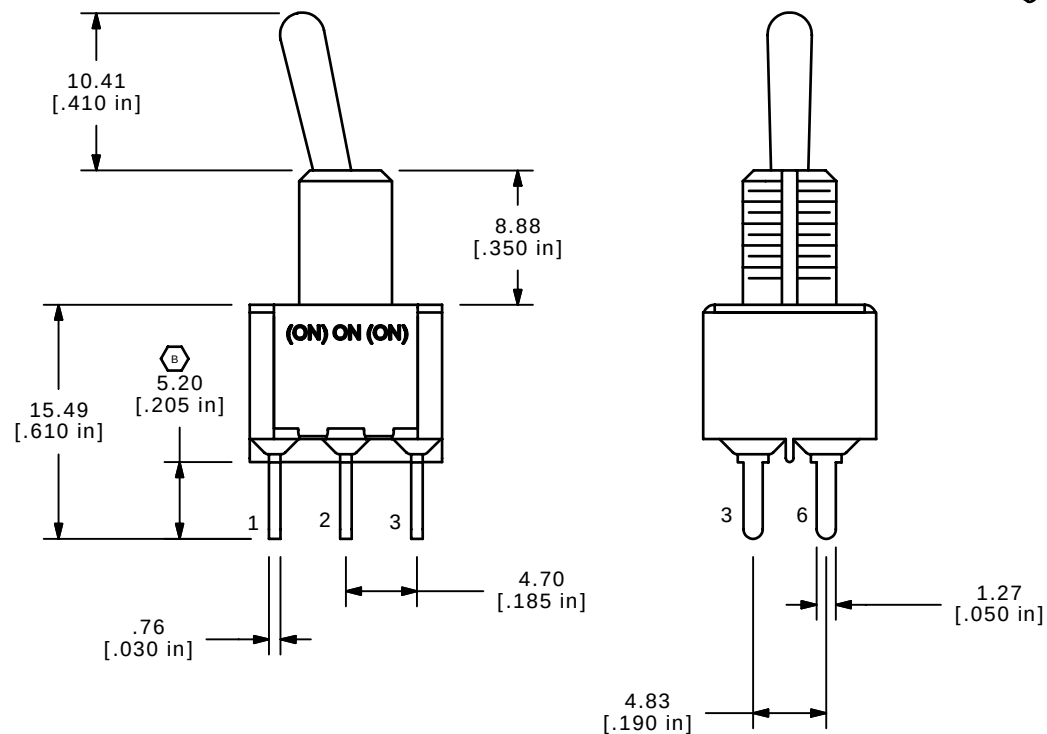

B	17611	ADJUST 1 DIM, CHANGE NOTE TO (ON)	8/31/07	BLR
A	17598	RELEASED FOR PRODUCTION	8/29/07	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP8T1B1M2QE

SCALE 2:1

DATE 8/31/2007

DR BLR

DWG T128109

REV B