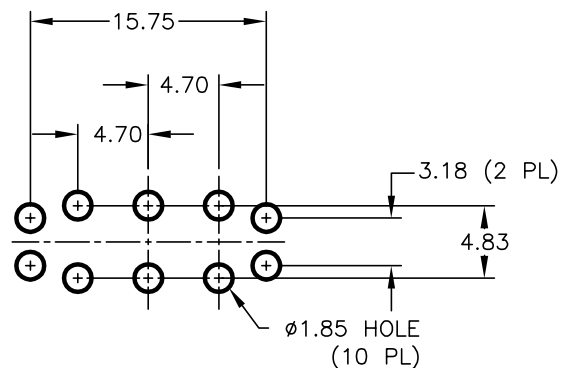
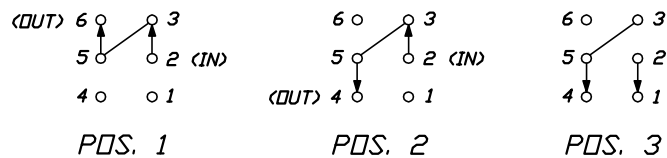




RECOMMENDED PCB LAYOUT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<DN>	DN	<DN>
2-3,5-6	2-3,5-4	2-1,5-4

() = Momentary


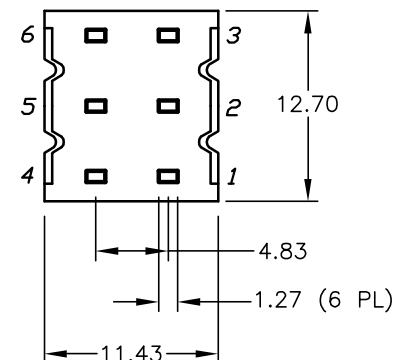


CIRCUIT: DPDT 3-WAY

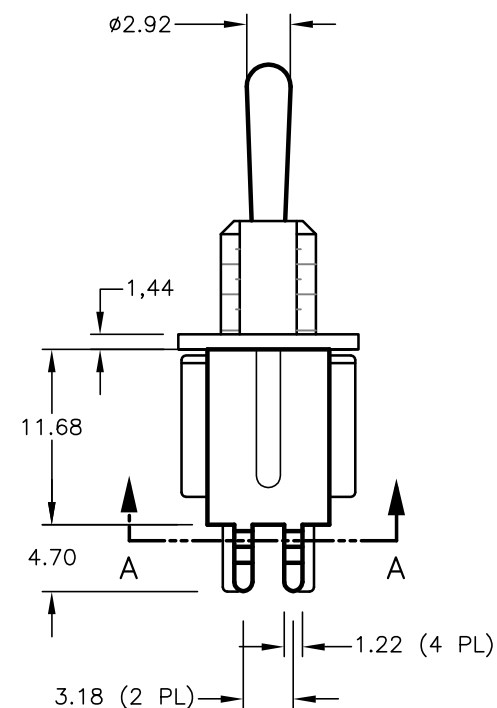
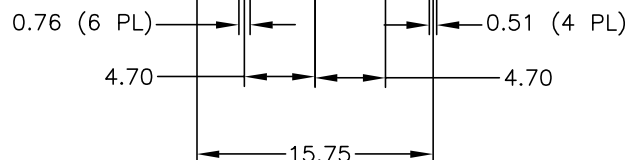
NOTE: JUMPER PIN 3 TO PIN 5

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 5A @120VAC or 28VDC.
2A @250VAC
- FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver plate.
- ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

SECTION A-A
BRACKET NOT SHOWN15/32-32 NS
THD.E-SWITCH
MARKING
OPPOSITE SIDE

(B)

CRIMPED
BRACKET**E-SWITCH®**

B	13479	FUNCTION TEXT ON FRONT VIEW	9/19/03	AR
A	12604	RELEASED	12/3/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

100 DP-8 T1 B9 VS21 Q (NO EPOXY)

SCALE

2:1

DATE

12/3/02

DR

CJB

DWG

T128108

REV

B