
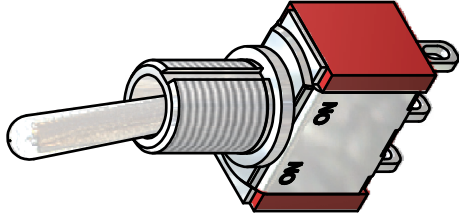
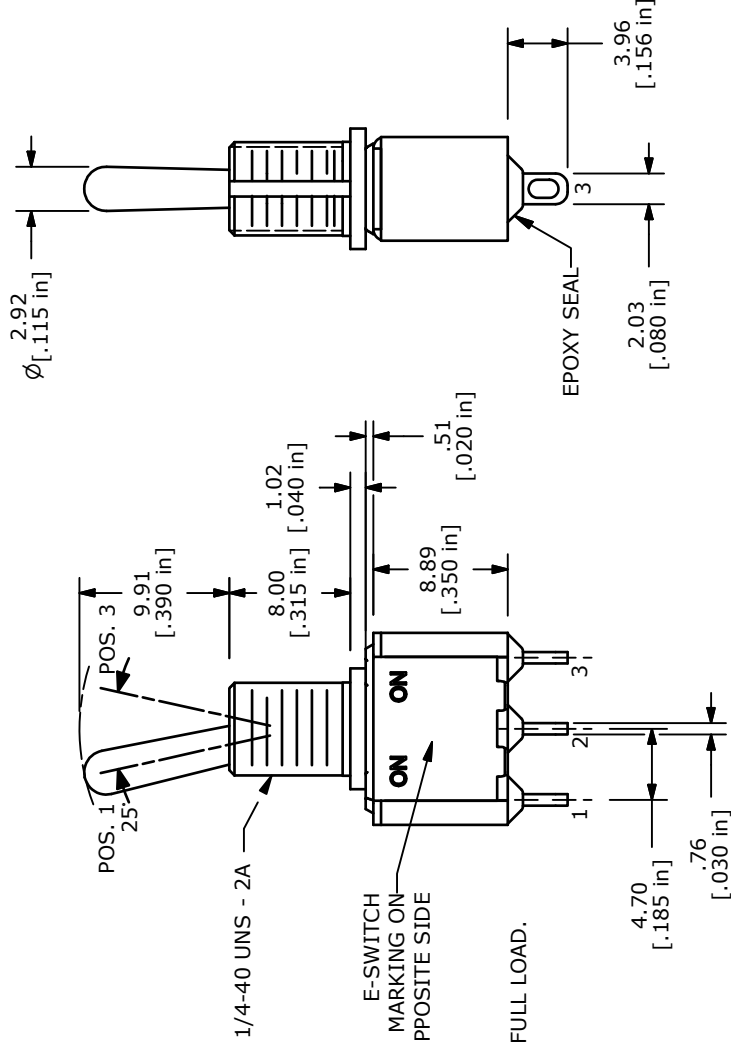


CIRCUIT: SPDT

SWITCH FUNCTION				
POS. 1	POS. 2	POS. 3		
			ON	2-1
2-3	N/A	N/A	NONE	ON

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: GOLD
- CONTACT RATING: 0.4VA MAX @ 20V MAX (AC or DC)
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

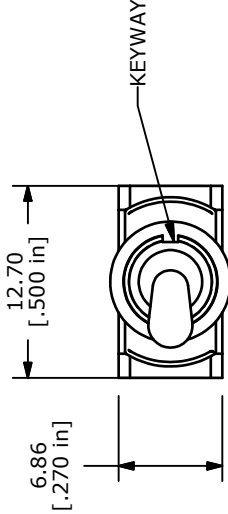

ISOMETRIC



TITLE 100SP1T1B6M1RE

REV	PCR NO	RELEASED FOR PRODUCTION	DATE	BY
A	19607	1/21/11	1/21/11	BGL
DESCRIPTION				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE	DATE	DR	DWG	REV
2:1	1/21/2011	BGL	T111167	A