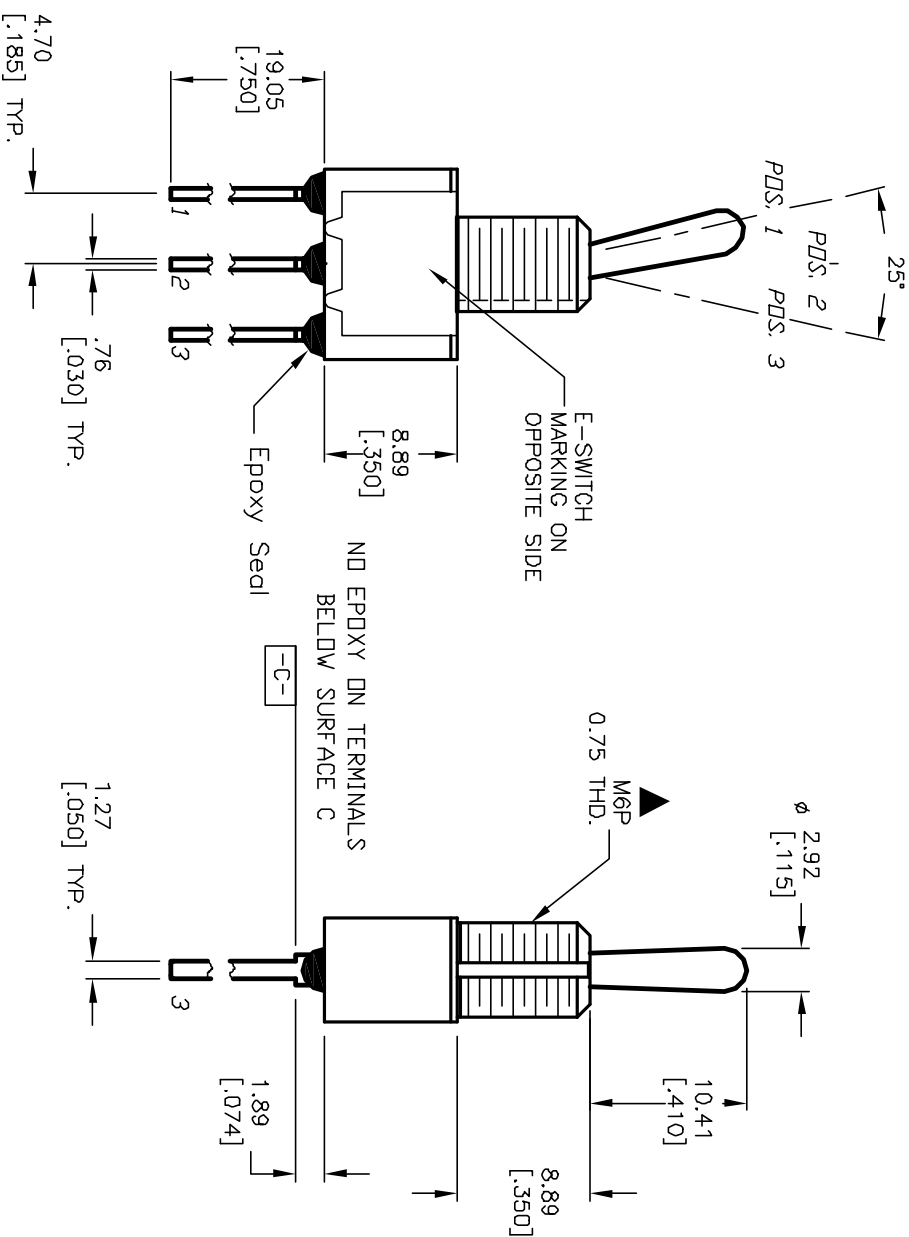
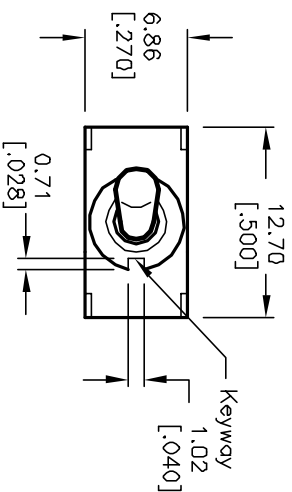


| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| DN              | NONE   | DN     |
| 2-3             | OPEN   | 2-1    |

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE:  $X.X = \pm 0.4$   
 $X.XX = \pm 0.25$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC  
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:  
Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break  
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sed level
9. OPERATING TEMP.: -30°C to +85°C

**E-SWITCH®**

|                                                                                                              |         |                         |        |                         |         |     |
|--------------------------------------------------------------------------------------------------------------|---------|-------------------------|--------|-------------------------|---------|-----|
|                                                                                                              |         |                         | TITLE  |                         |         |     |
| B                                                                                                            | 12137   | RELEASED FOR PRODUCTION | 5/9/02 | 100 SP-1 T1 B8 M5-1 Q E |         |     |
| REV.                                                                                                         | ECN NO. | DESCRIPTION             | DATE   | CHKD                    |         |     |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |         |                         |        |                         |         |     |
| SCALE                                                                                                        |         |                         | DATE   | DR                      | DWG     | REV |
| 2:1                                                                                                          |         |                         | 5/9/02 | CJB                     | T111104 | A   |