






P.C. MOUNTING

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
2-3	N/A	2-1



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY
4. RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/SLIVER PLATE OVER NICKEL PLATE
6. ELECTRICAL LIFE: 40,000 make and break cycles at full load
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. DIELECTRIC STRENGTH: 1000V RMS @ SEA LEVEL
9. OPERATING TEMP: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER
- ▲ 11. CONTACT MATERIAL: SILVER

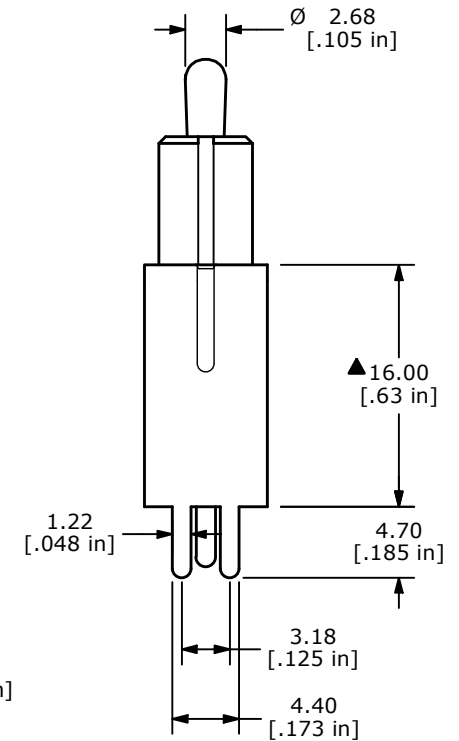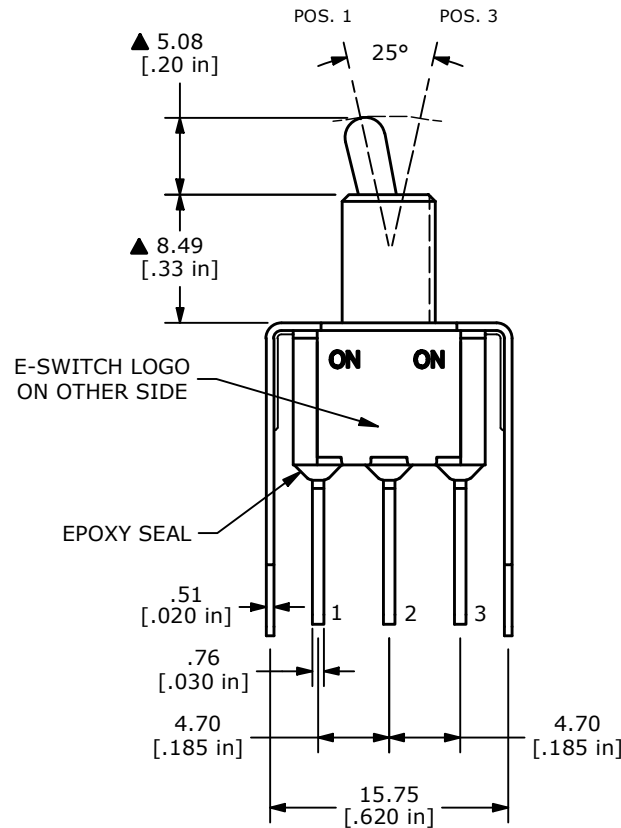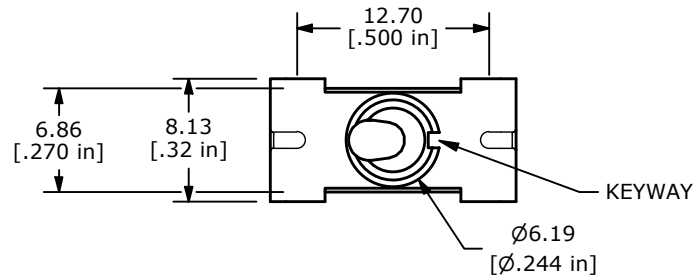

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100154	RELEASE	06/11/21	JM	100SP1T2B2VS3QE				100116966
					SCALE	DATE	DR	DWG	REV
					2:1	6/9/2021	JM	T123066	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED