
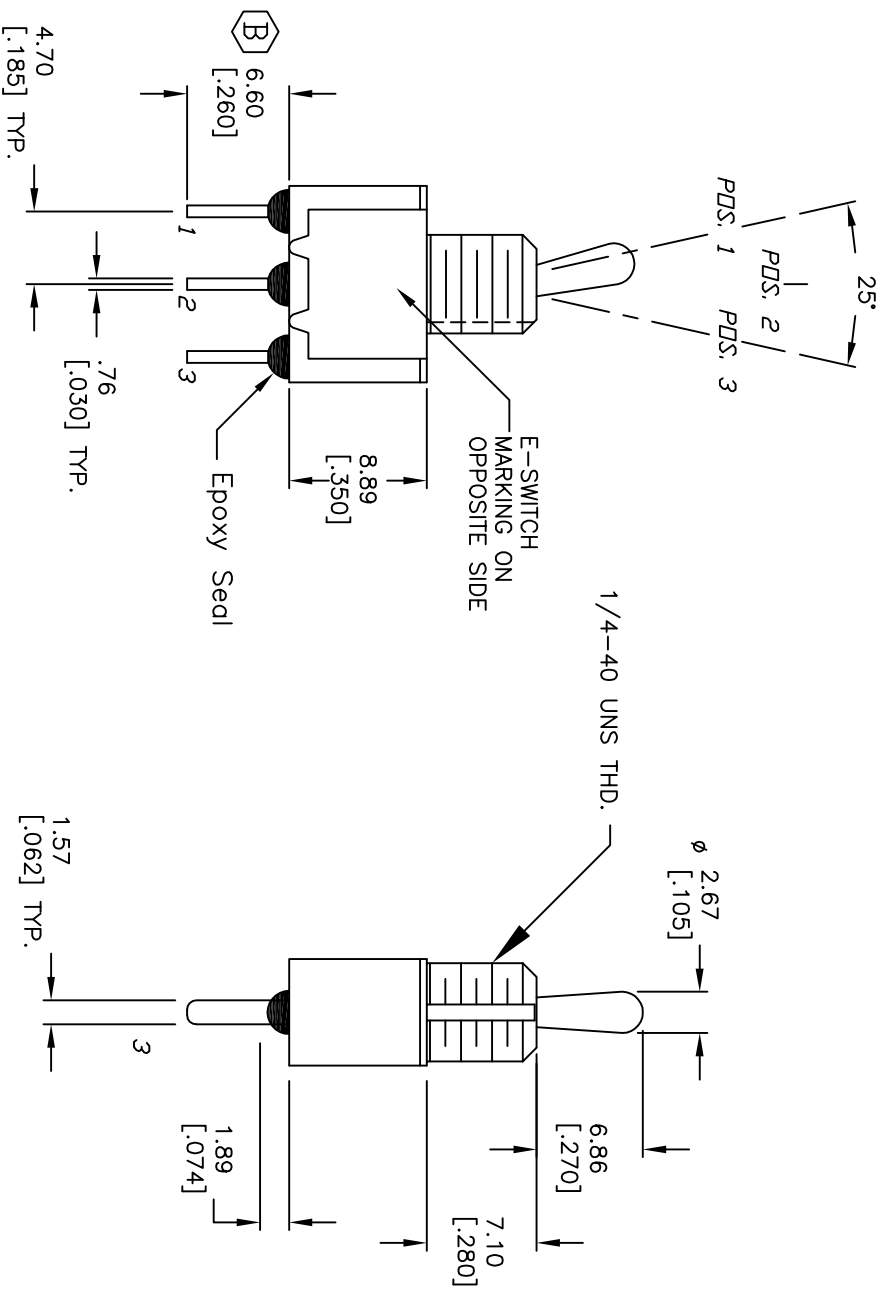


CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC or 28VDC
2A @250VAC
- FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver plate.
- ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to +85°C
- 2002/95/EC (ROHS) COMPLIANT.

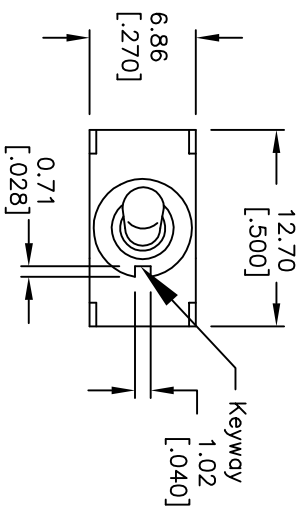

TITLE				E-SWITCH®		LAMB INDUSTRIES	
100 SP-1 T2 B3 M3 Q E				SCALE		DATE	
2:1				7/20/09		DR	
BLR				DWG		T111108	
REV				B			
REV.				ECN No.		DATE	
A				12409		9/11/02	
B				18592		7/20/09	
TERMINAL DIMENSION UPDATED				RELEASED FOR PRODUCTION		CJB	
DESCRIPTION				CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							