


RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NDNE	DN
2-3	DPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NDS. FOR REF. ONLY
4. RATING: 0.4VA max @20VAC or DC.
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Gold Plate over Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C

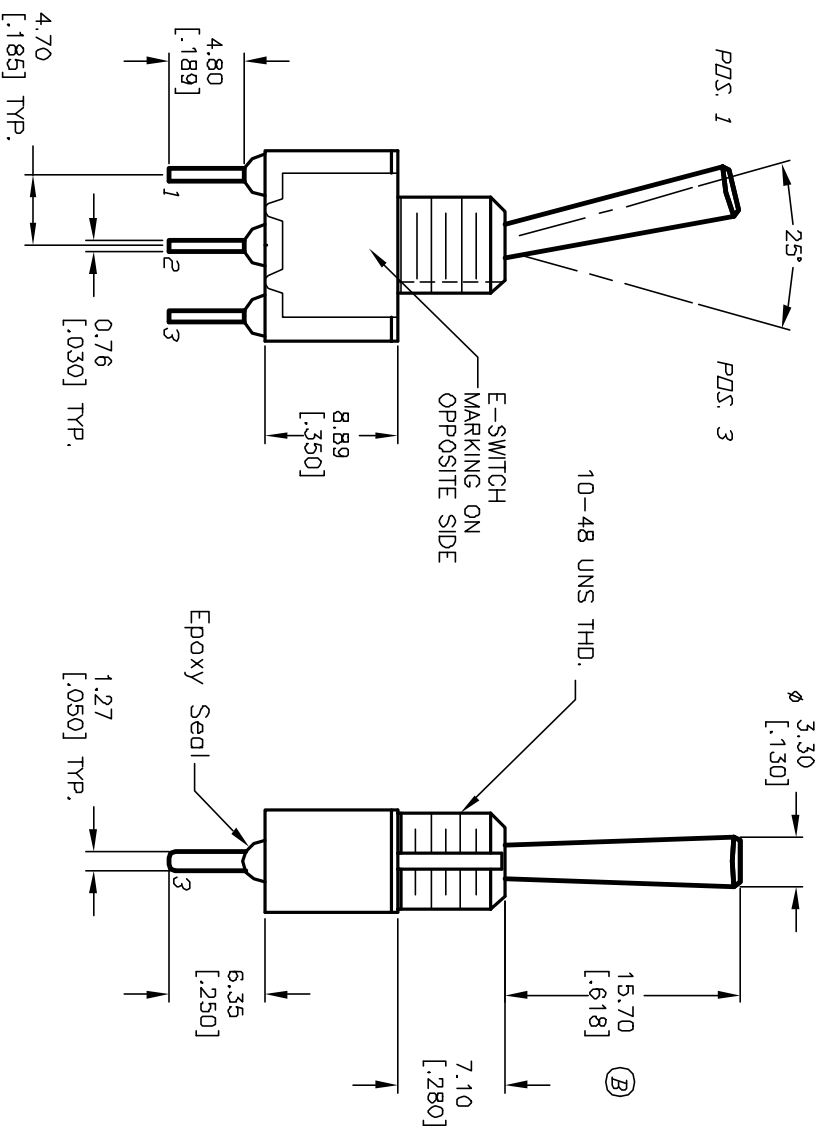

TITLE			
100 SP-1 T3 B3 M2 R E			
E-SWITCH®			
B	12003	REVISED ACTUATOR	4/15/02 CJB
A	11985	RELEASED FOR PRODUCTION	3/5/02 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED			
SCALE		DATE	DR
2:1		3/5/02	CJB
		DWG	T111098
		REV	B