





RECOMMENDED PANEL MOUNTING

| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | NONE   | ON     |
| 2-3               | N/A    | 2-1    |

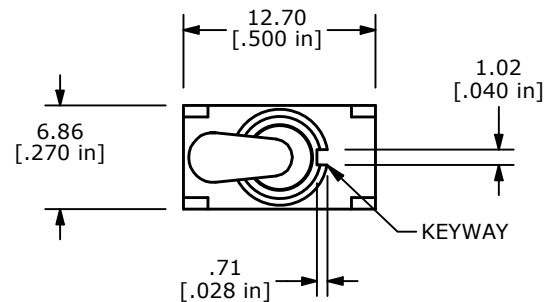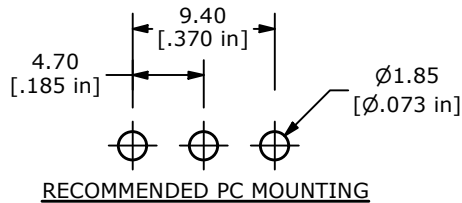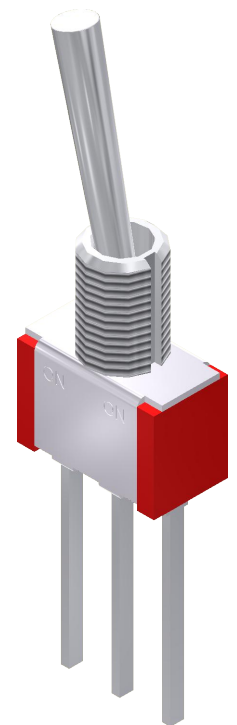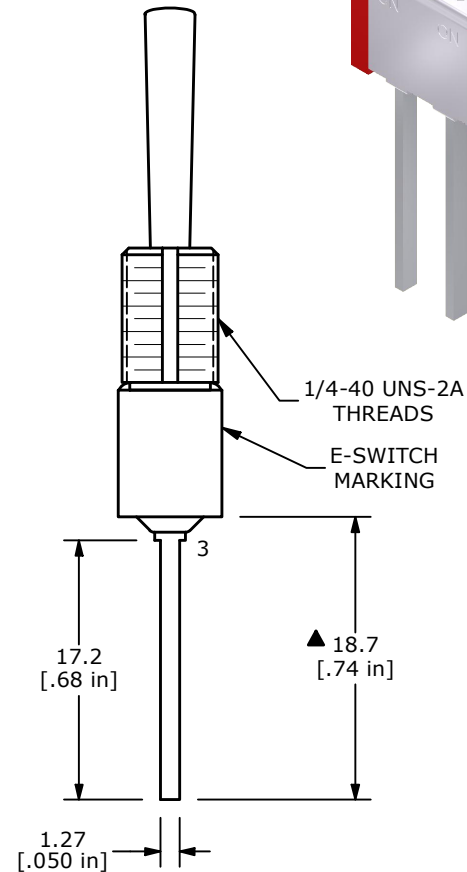

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC  
5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

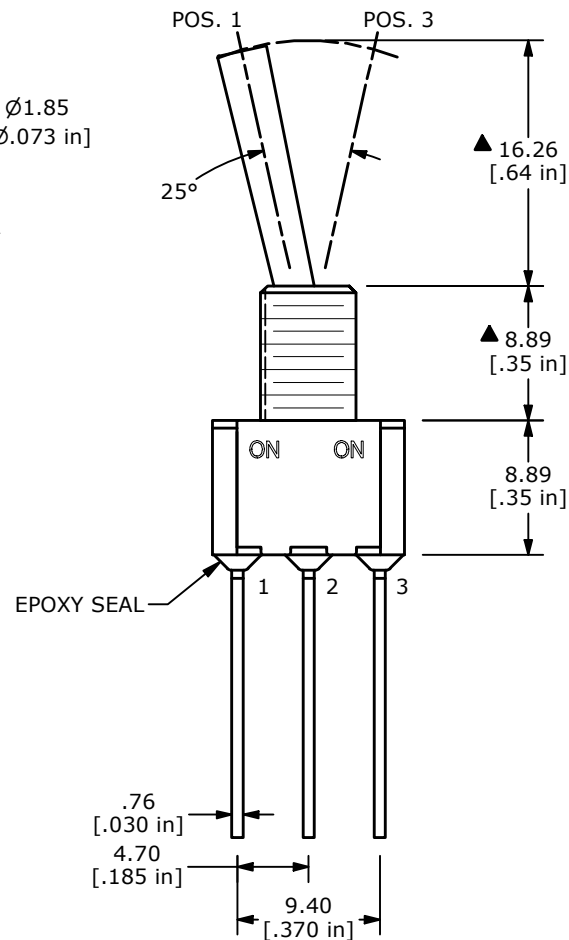

| REV | ECO NO     | DESCRIPTION                 | DATE     | BY | E-SWITCH®             |            |    |         | OBJECT ID |
|-----|------------|-----------------------------|----------|----|-----------------------|------------|----|---------|-----------|
| B   | ECO-102342 | ACTUATOR DIM 16.04 to 16.26 | 11/01/23 | MR | TITLE 100SP1T4B1M51QE |            |    |         | 000023887 |
|     |            |                             |          |    | SCALE                 | DATE       | DR | DWG     | REV       |
|     |            |                             |          |    | 2:1                   | 10/16/2006 | TN | T111078 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED