



PANEL MOUNTING

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1


() = MOMENTARY

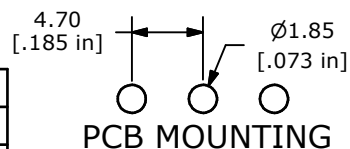

CIRCUIT: SPDT


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5A @ 120VAC OR 28VDC
2A @ 250VAC
6. ELECTRIC LIFE: 40,000 CYCLES
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

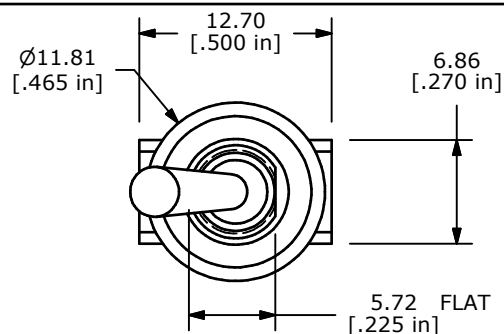

POS. 1 POS. 3

25°

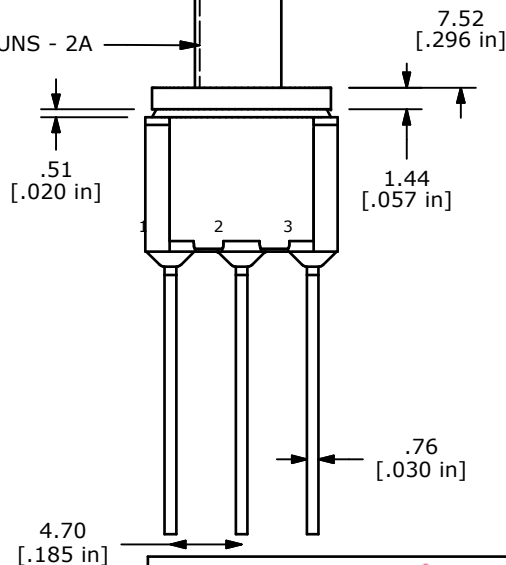

1/4-40 UNS - 2A

Ø 3.30
[.130 in]21.34 MAX
[.840 in]8.89
[.350 in]

3

18.70
[.736 in]1.27
[.050 in]E-SWITCH
MARKING

TITLE 100SP1T5B9M51QE

A	21343	RELEASED FOR PRODUCTION	1/8/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE 1/8/2014	DR EBP	DWG T115047	REV A
-------	------------------	-----------	----------------	----------