

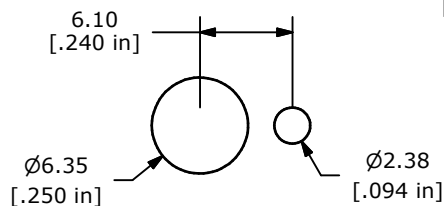


WITHOUT LOCK RING


# PANEL MOUNTING OPTIONS

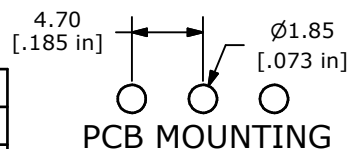

WITH LOCK RING

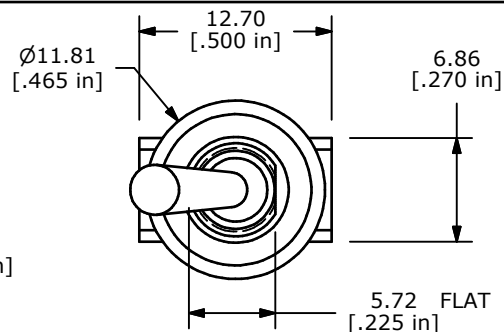

PCB MOUNTING






| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | ON     |
| 2-3             | N/A    | 2-1    |

() = MOMENTARY

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: SILVER
5. RATING: 5A @ 120VAC OR 28VDC  
2A @ 250VAC
6. ELECTRIC LIFE: 40,000 CYCLES
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
12. HARDWARE TO BE SHIPPED BULK:  
T100011 - LOCK WASHER (1)  
T100002 - LOCK RING (1)  
T100000 - HEX NUT (2)  
T100016 - "O" RING (1)

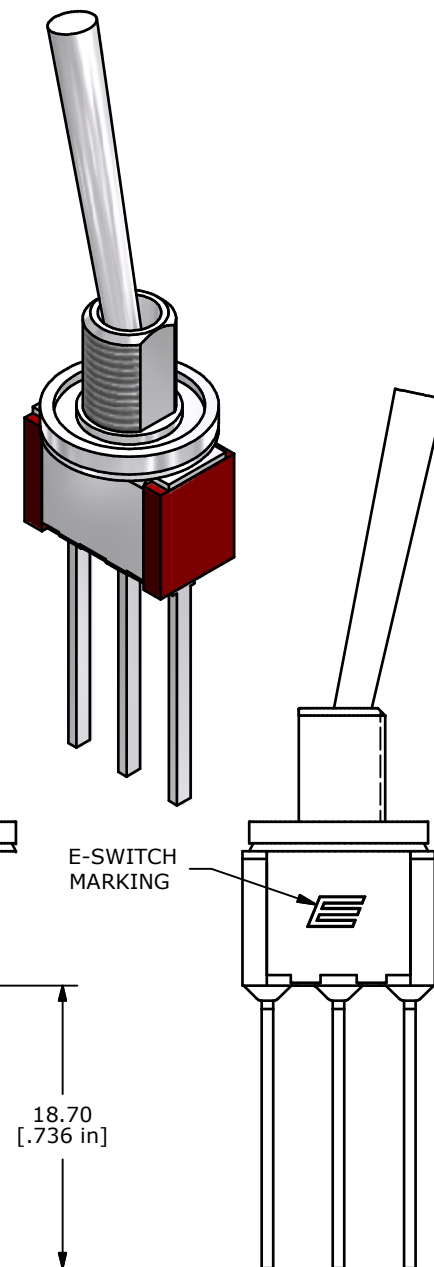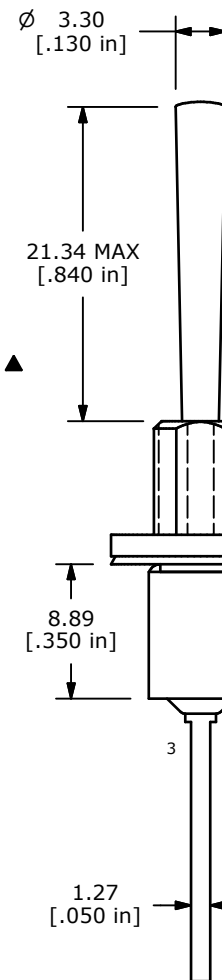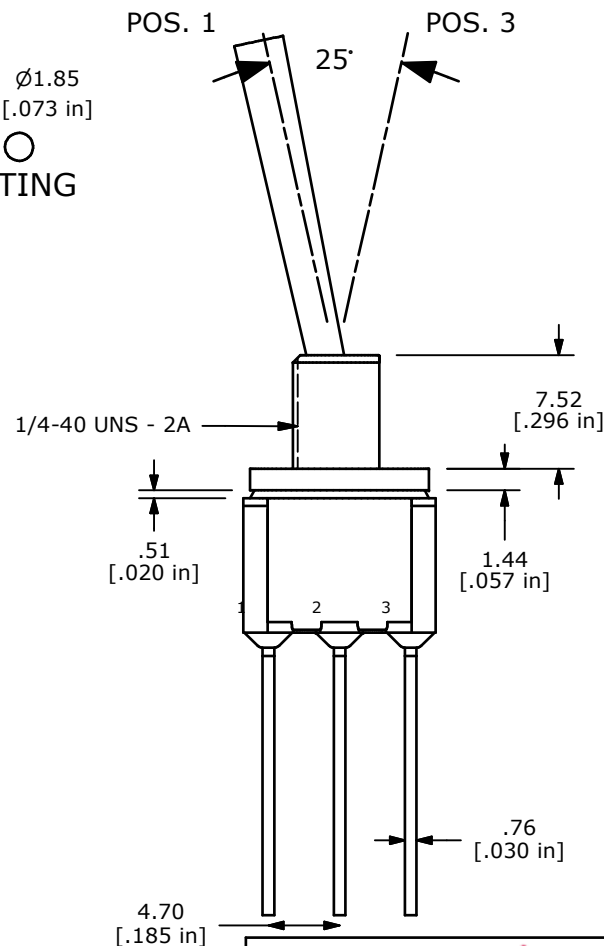

TITLE 100SP1T5B9M51QEH

|     |        |                         |        |     |
|-----|--------|-------------------------|--------|-----|
| A   | 21343  | RELEASED FOR PRODUCTION | 1/8/13 | EBP |
| REV | PCR NO | DESCRIPTION             | DATE   | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|       |                  |           |                 |          |
|-------|------------------|-----------|-----------------|----------|
| SCALE | DATE<br>1/8/2014 | DR<br>EBP | DWG<br>ST115047 | REV<br>A |
|-------|------------------|-----------|-----------------|----------|