


CIRCUIT: SPDT

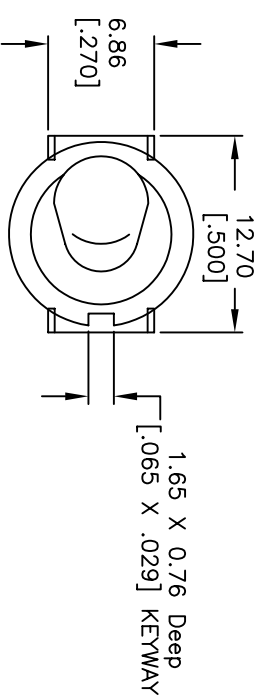


POS. 1 POS. 2

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NDNE	DN
2-3	OPEN	2-1

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC OR 28VDC; 2A @250VAC
- FIXED TERM. & MOVING CONTACT; Copper Alloy W/Silver plate.
- ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

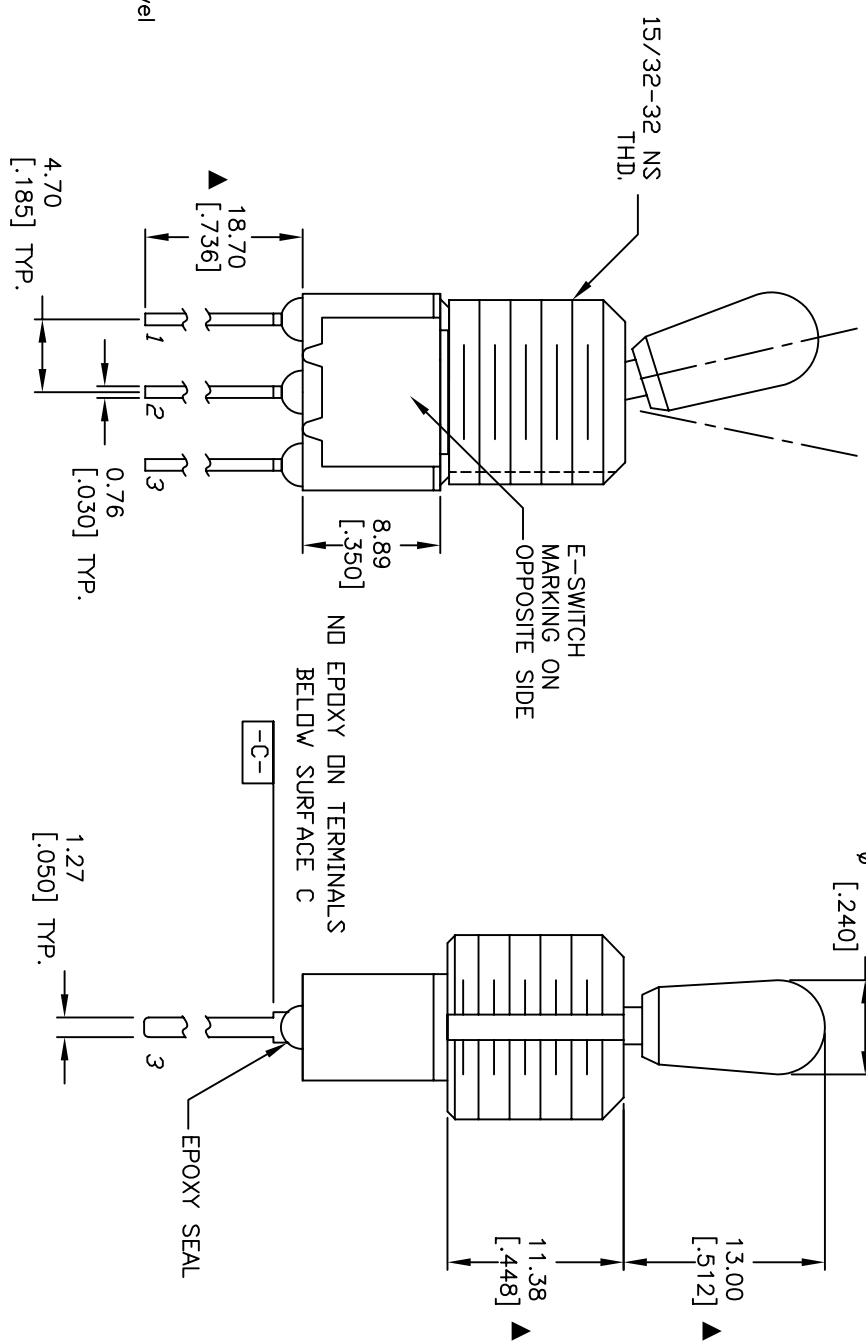

D	15538	DIM FROM 19.05 TO 18.70	11/16/05	PH	E-SWITCH®				
C	15511	ADD ROHS NOTE	11/8/05	PH					
B	14164	UPDATE ACTUATOR	7/13/04	AR	100SP1T7B13MS1QE				
A	13126	RELEASED FOR PRODUCTION	5/9/03	AR					
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	5/9/03	AR	T111033	D