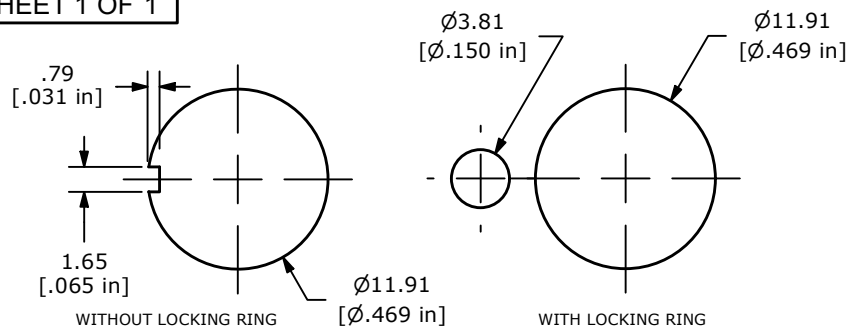
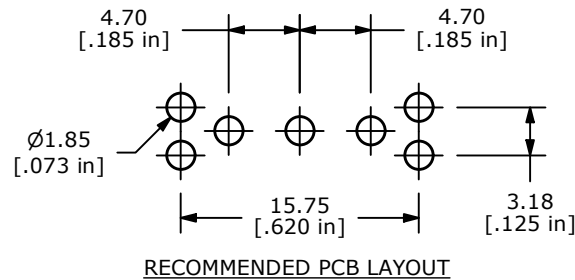



**RECOMMENDED PANEL MOUNTING**




| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | NONE   | ON     |
| 2-3               | N/A    | 2-1    |

**RECOMMENDED PCB LAYOUT**


CIRCUIT: SPDT

**NOTE:**

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

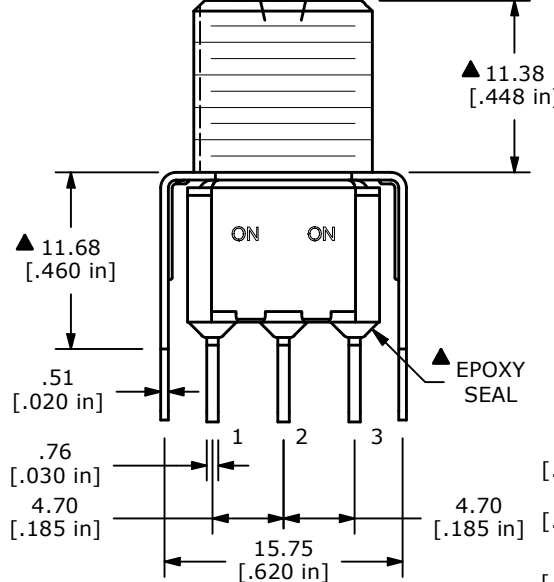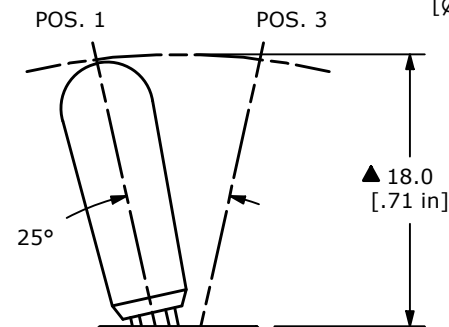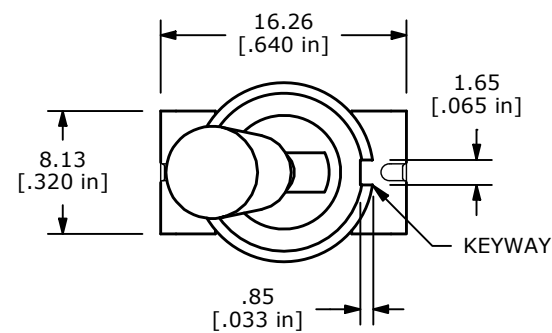


Ø6.10  
[Ø.240 in]

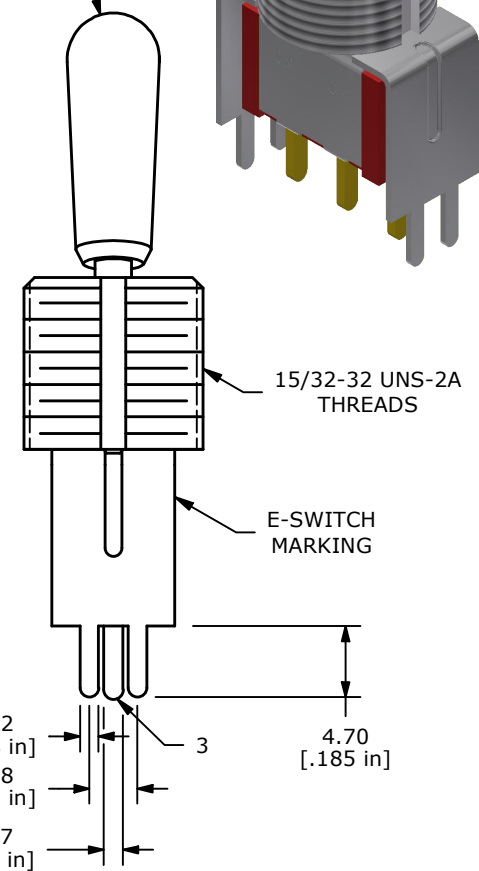

15/32-32 UNS-2A  
THREADS

E-SWITCH  
MARKING

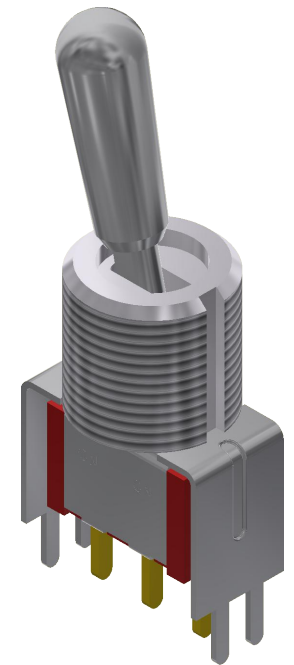

| REV | ECO NO     | DESCRIPTION       | DATE     | BY |
|-----|------------|-------------------|----------|----|
| C   | ECO-102350 | 100 SERIES UPDATE | 01/10/24 | MR |
|     |            |                   |          |    |
|     |            |                   |          |    |

**E-SWITCH®**

OBJECT ID  
000024039

TITLE 100SP1T8B13VS2REH

SCALE  
2:1

DATE  
2/22/2008

DR  
BLR

DWG  
T113057

REV  
C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED