

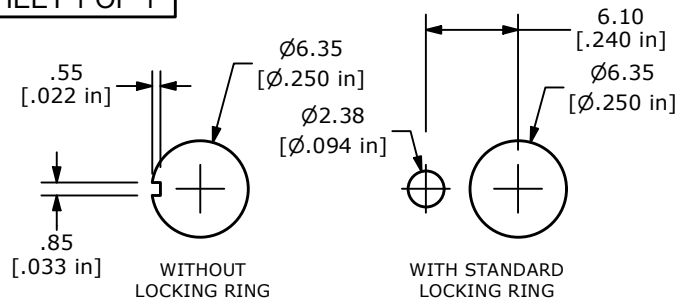




## RECOMMENDED PANEL MOUNTING





| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | (ON)   |
| 2-3             | N/A    | 2-1    |

( ) = DENOTES MOMENTARY

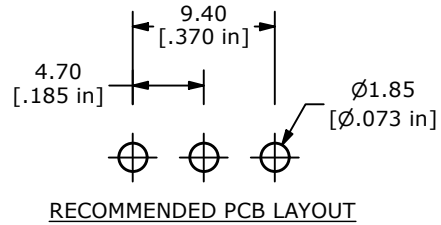

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- RATING: 2A @ 250 VAC  
5A @ 120 VAC OR 28 VDC
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -40°C TO 85°C
- ▲ DENOTES CRITICAL PARAMETER.

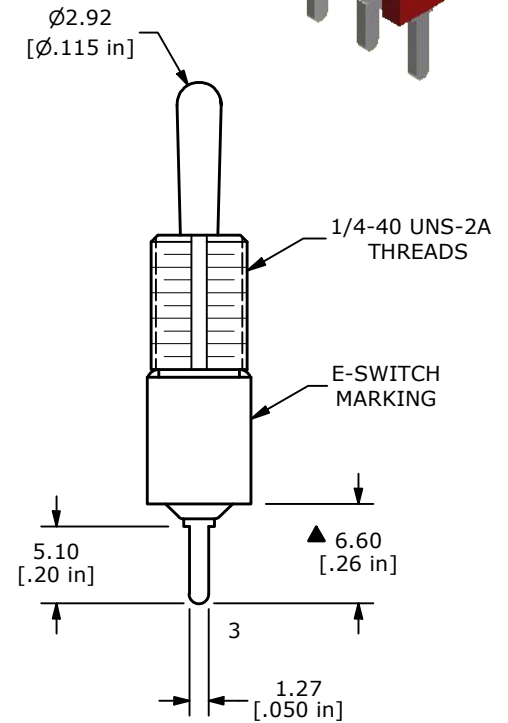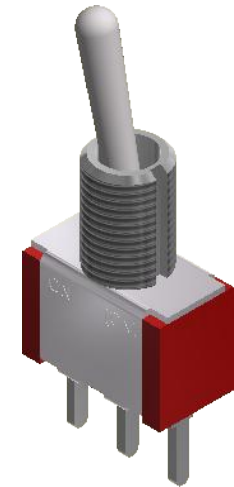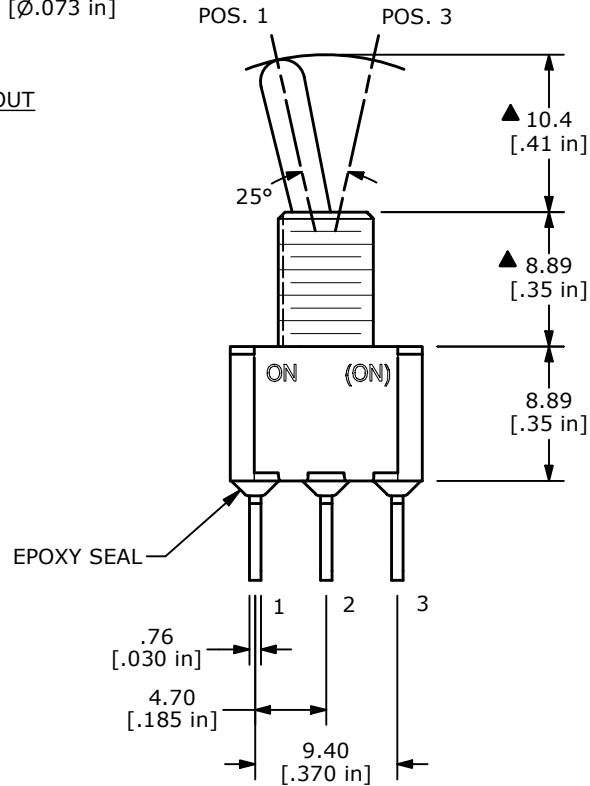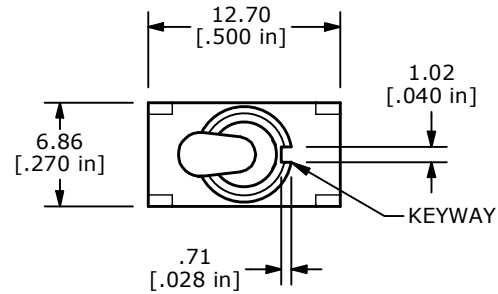

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®            |           |    |         | OBJECT ID |
|-----|------------|-------------------|----------|----|----------------------|-----------|----|---------|-----------|
| E   | ECO-101768 | 100 SERIES UPDATE | 03/28/23 | MR | TITLE 100SP2T1B1M2QE |           |    |         | 000023957 |
|     |            |                   |          |    | SCALE                | DATE      | DR | DWG     | REV       |
|     |            |                   |          |    | 2:1                  | 9/25/2007 | BO | T112003 | E         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED