



CIRCUIT: SPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NDNE	<DN>	
2-3	DPEN	2-1	

< >=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC max.
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy /w GOLD plate over
Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

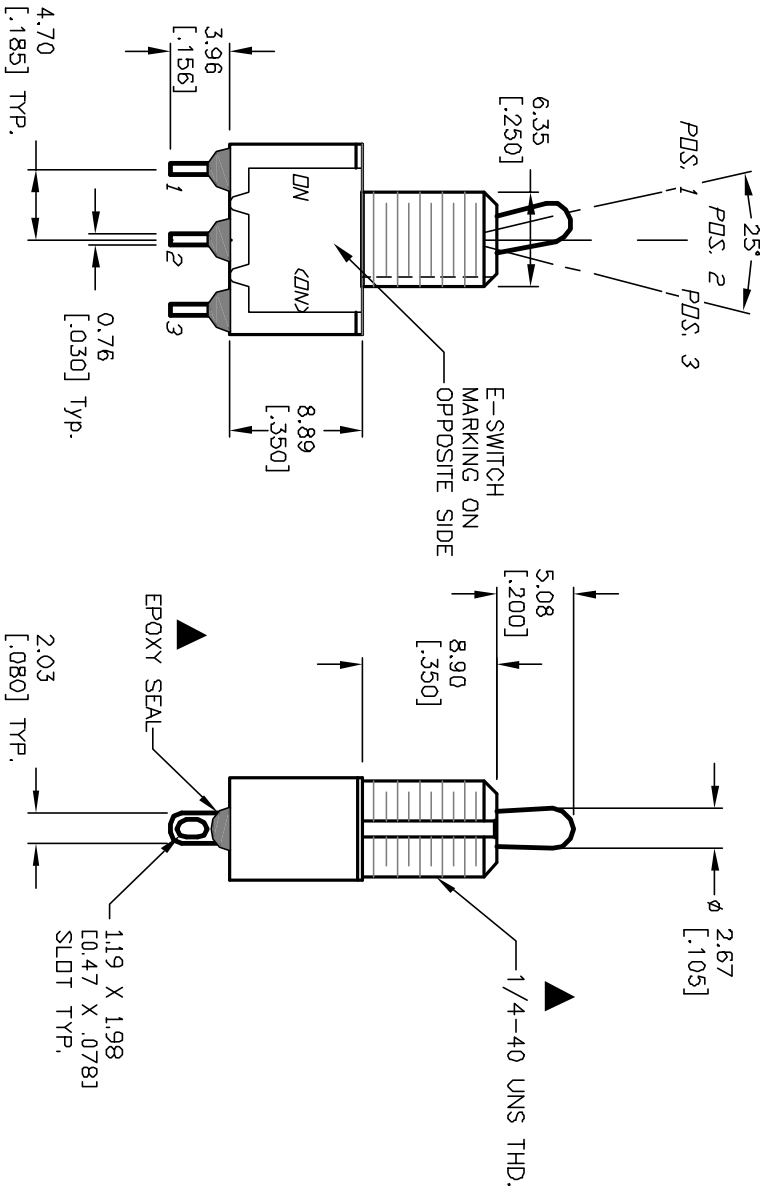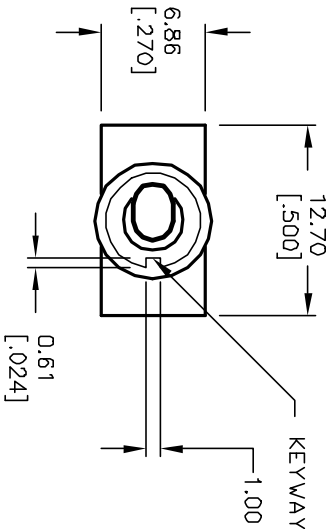

B. DIELECTRIC STRENGTH: 1000V RMS @sea level					E-SWITCH®									
9. OPERATING TEMP.: -30°C to 85°C														
TITLE					100 SP-2 T2 B1 M1 R E									
A	12166	RELEASED FOR PRODUCTION	5/20/02	CJB	SCALE	2:1	DATE	5/20/02	DR	CJB	DWG	T112000	REV	A
REV.	ECN No.	DESCRIPTION	DATE	CHKD	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									

E-SWITCH®