
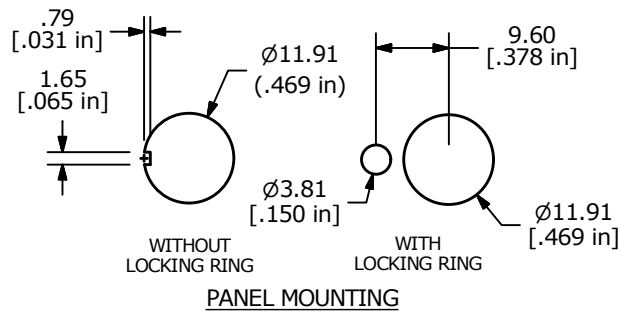
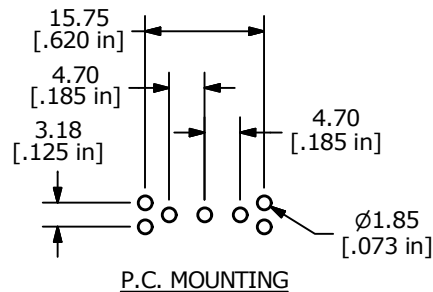


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	(ON)
2-3	N/A	2-1


(ON) = MOMENTARY



CIRCUIT: SPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 0.4 (VA) Max. @ 20V (AC or DC)
6. CONTACT RESISTANCE: 10 MILLI-OHMS MAX. INITIAL
@ 2-4 VDC 100 MILLE-AMPS
7. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

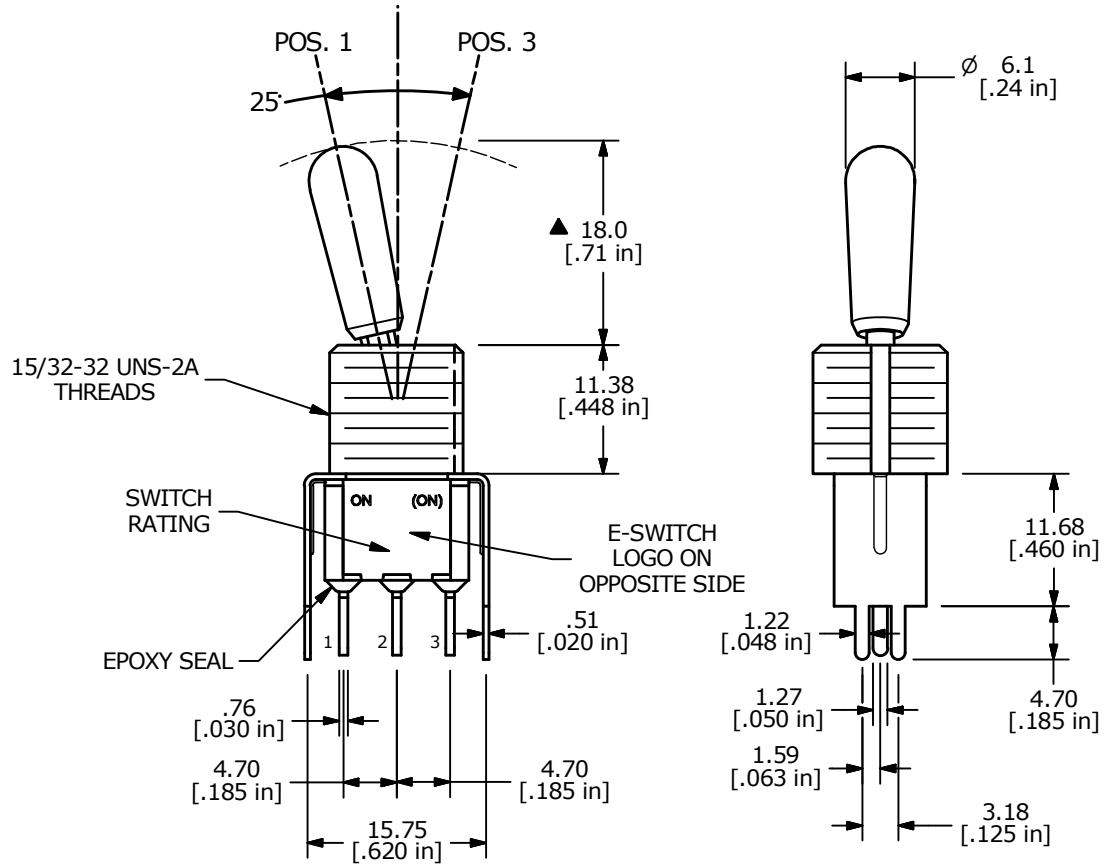

B	23857	update drawing	4/22/19	MW
A	18282	RELEASED FOR PRODUCTION	10/27/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100SP2T8B13VS2RE				
SCALE 3:2	DATE 10/27/2008	DR BLR	DWG T113068	REV B