



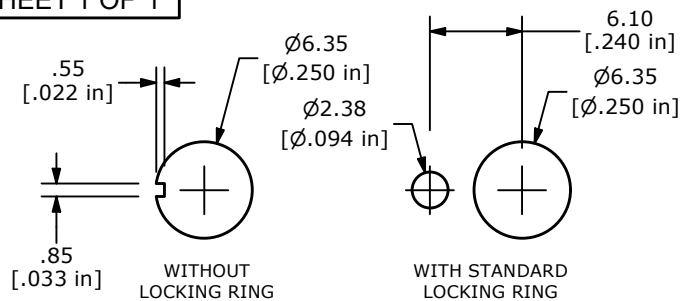


RECOMMENDED PANEL MOUNTING

| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | OFF    | ON     |
| 2-3               | OPEN   | 2-1    |

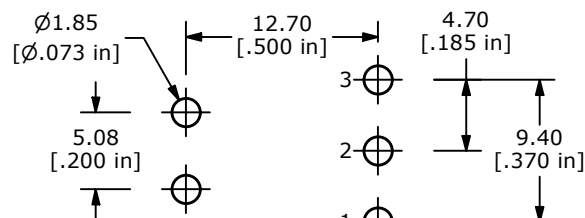




RECOMMENDED PCB LAYOUT



CIRCUIT: SPDT

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC  
5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK  
T100011 - LOCK WASHER - QTY 1  
T100015 - LOCK RING - QTY 1  
T100000 - HEX NUT - QTY 2

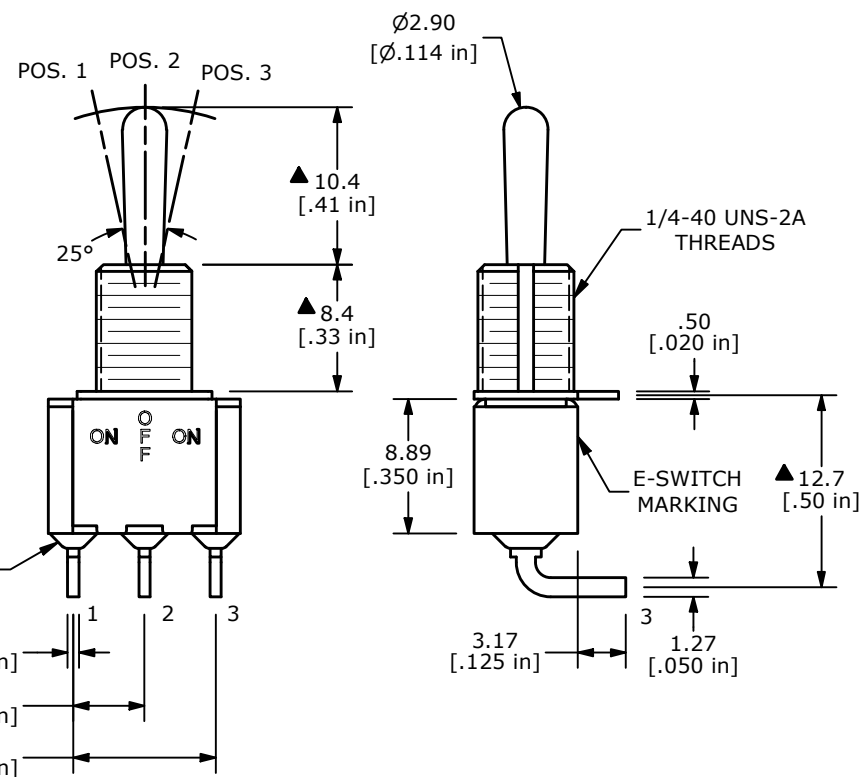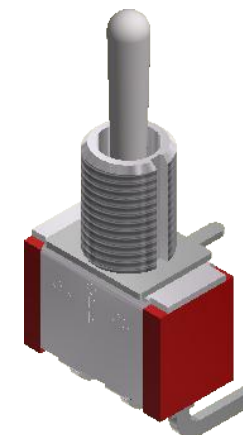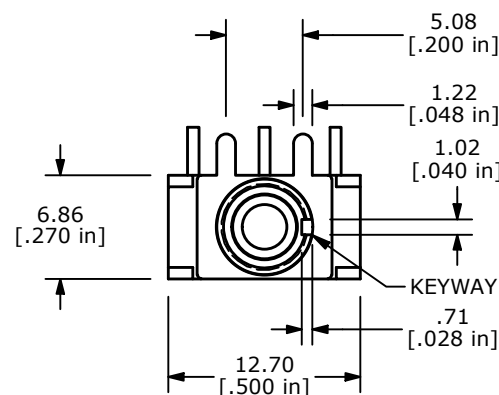

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®        |           |    |          | OBJECT ID |
|-----|------------|-------------------|----------|----|------------------|-----------|----|----------|-----------|
| C   | ECO-101718 | 100 SERIES UPDATE | 03/27/23 | MR | 100SP3T1B1M6QE H |           |    |          | 000023018 |
|     |            |                   |          |    | SCALE            | DATE      | DR | DWG      | REV       |
|     |            |                   |          |    | 2:1              | 9/23/2011 | RC | ST113051 | C         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED