


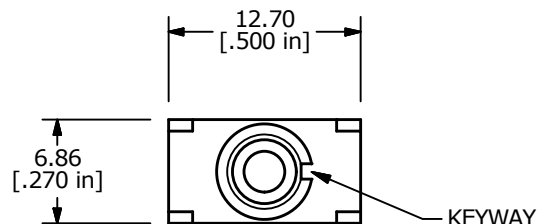
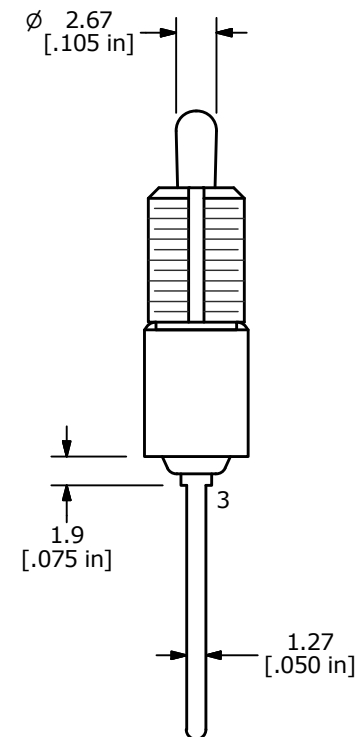


RECOMMENDED PC MOUNTING

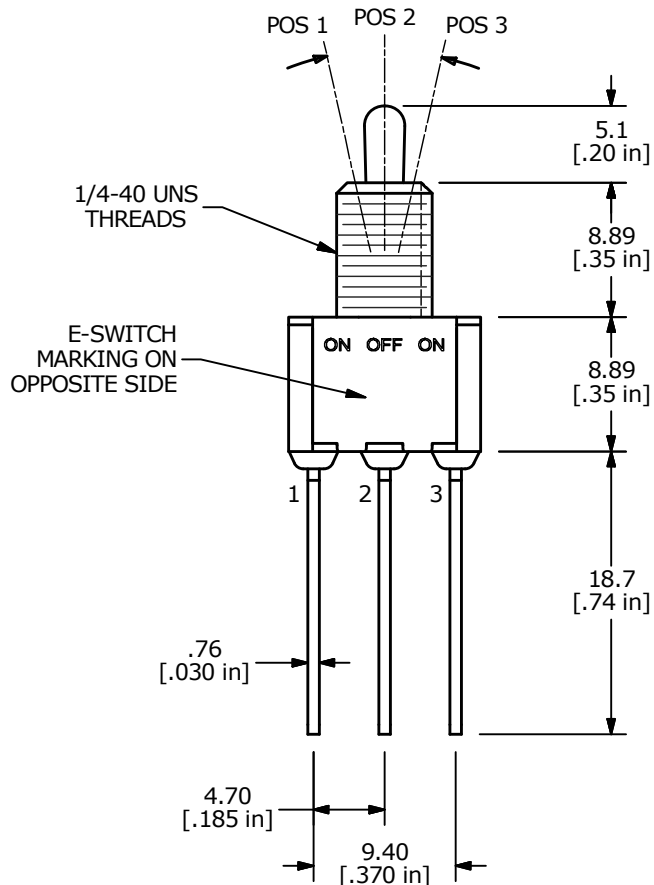

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ PLATING MATERIAL: GOLD
- RATING: 0.4 (VA) Max. @20V Max.
- ELECTRIC LIFE: 40,000 make-and-break cycles at full load
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER
- 2011/65/EU (ROHS) COMPLIANT
- HARDWARE TO BE SHIPPED BULK:
T100011 - LOCK WASHER (QTY 1)
T100015 - LOCK RING (QTY 1)
T100000 - HEX NUT (QTY 2)



TITLE 100SP3T2B1M51REH

A	23098	RELEASED FOR PRODUCTION	11/16/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	11/16/2017	MW	ST113084	A