
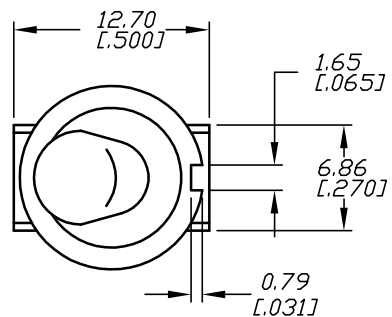

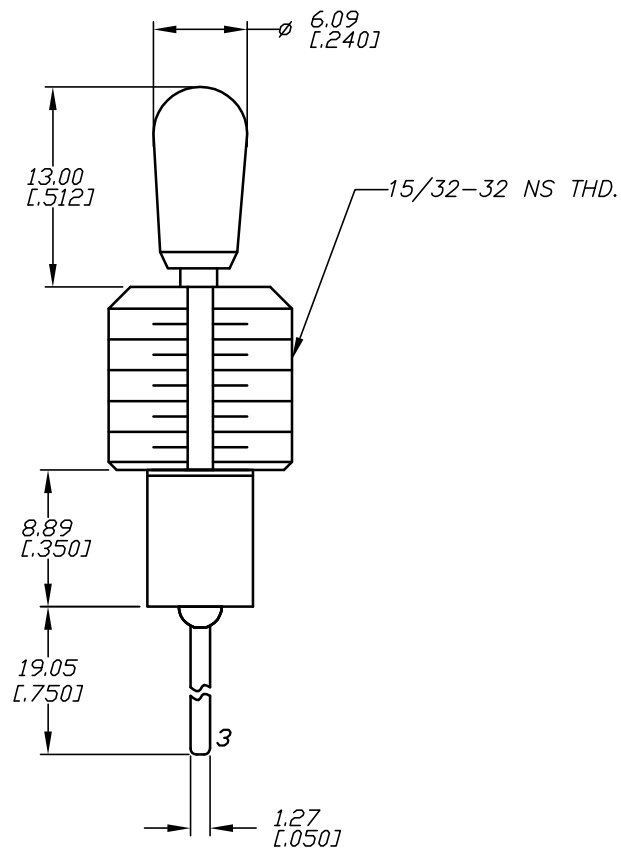


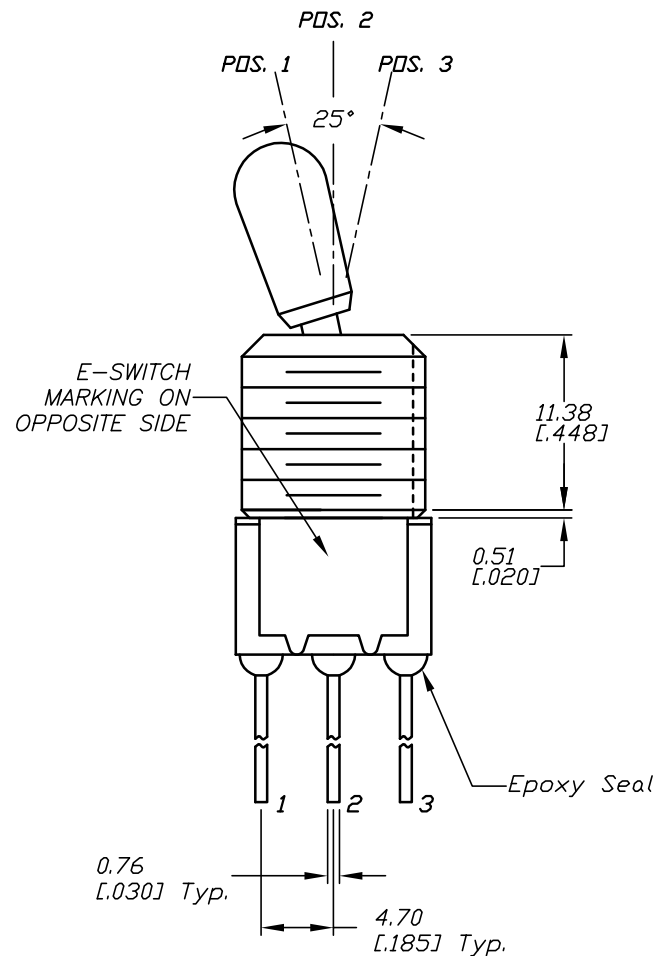

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) MAX. @20V MAX. (AC or DC)
5. ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
6. INSULATION RESISTANCE: 1,000M OHM MIN.
7. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL
8. OPERATING TEMP.: -30°C to 85°C

CIRCUIT: SPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| PDS. 1          | PDS. 2 | PDS. 3 |
|                 |        |        |
| ON              | OFF    | ON     |
| 2-3             | OPEN   | 2-1    |

**E-SWITCH®**

|      |         |                         |         |       |
|------|---------|-------------------------|---------|-------|
| B    | 14164   | UPDATE ACTUATOR         | 7/13/04 | AR    |
| A    | 10646   | RELEASED FOR PRODUCTION | 5/25/00 | MM    |
| REV. | ECN No. | DESCRIPTION             | DATE    | CHK'D |

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

TITLE

100 SP-3 T7 B13 M5-1 R E

SCALE

2:1

DATE

5/25/00

DR

MM

DWG

T113040

REV

B