


RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPD1

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
<DN>	EFF	<DN>
2-3	OPEN	2-1

() = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$

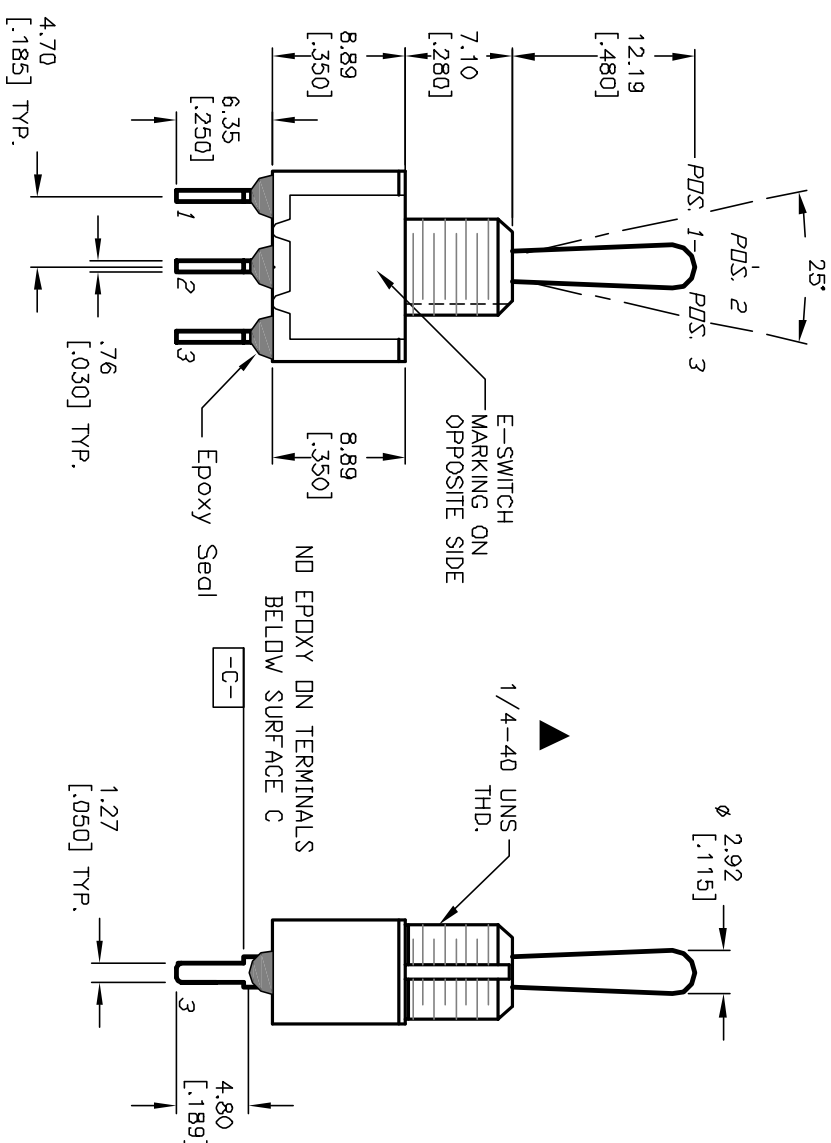**E-SWITCH®**

		TITLE			
A	12280	RELEASED	7/1/02	CJB	100 SP-4 T1 B3 M2 Q E
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED					
SCALE		2:1	DATE	--	DR
				--	DWG
					T114003
					REV A