

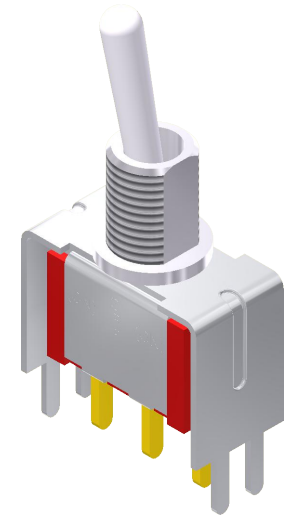


RECOMMENDED PANEL MOUNTING

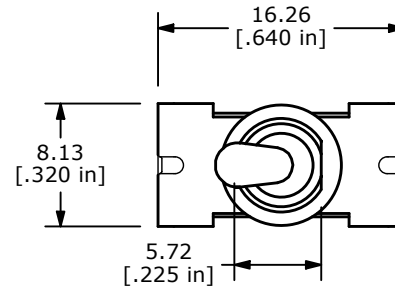


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

() = DENOTES MOMENTARY


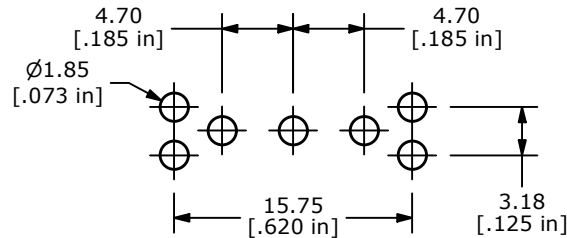


RECOMMENDED PCB LAYOUT



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

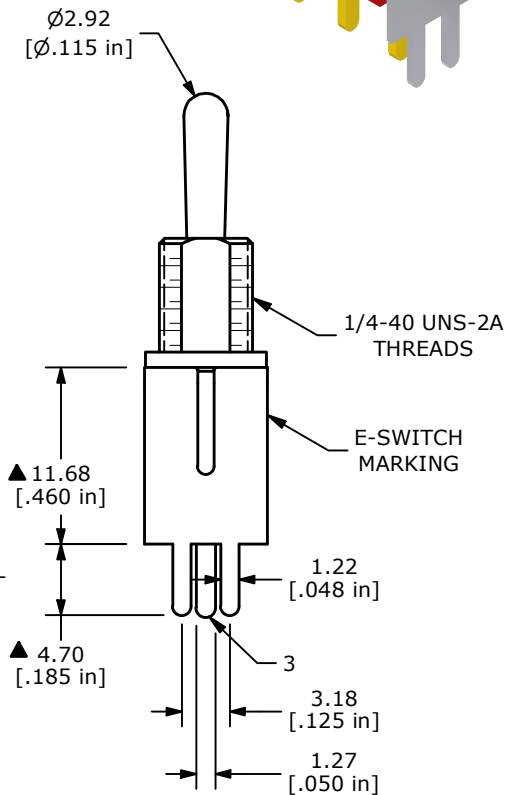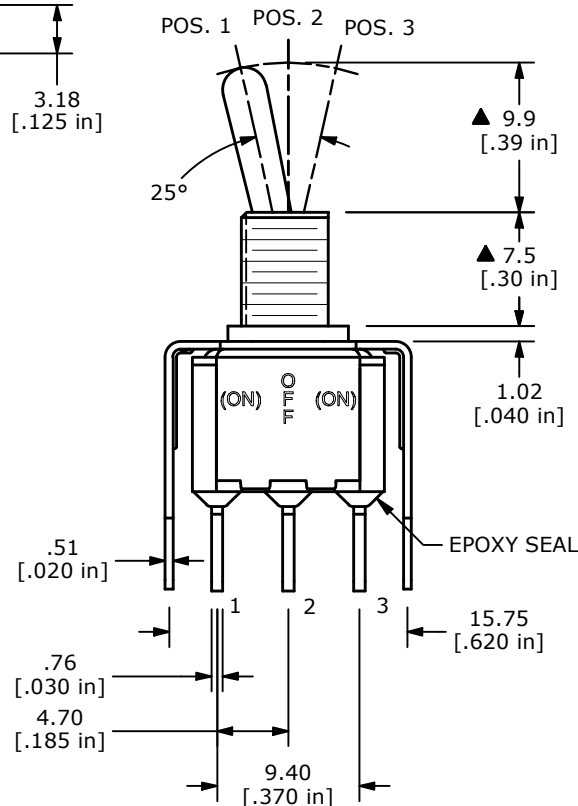1/4-40 UNS-2A
THREADSE-SWITCH
MARKING

E-SWITCH®

OBJECT ID
100125989

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102318	NEW RELEASE	11/01/23	MR

TITLE 100SP4T1B5VS2RE

SCALE
2:1DATE
10/27/2023DR
MJRDWG
T110029REV
ATHE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED