



CIRCUIT: SPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
<DN>	OFF	<DN>	
2-3	DPEN	2-1	

< >=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
5. FIXTED TERM/MOVING CONTACT:
Copper Alloy w/Silver plate.
cycles at full load.
6. ELECTRICAL LIFE: 50,000 make-and-break
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

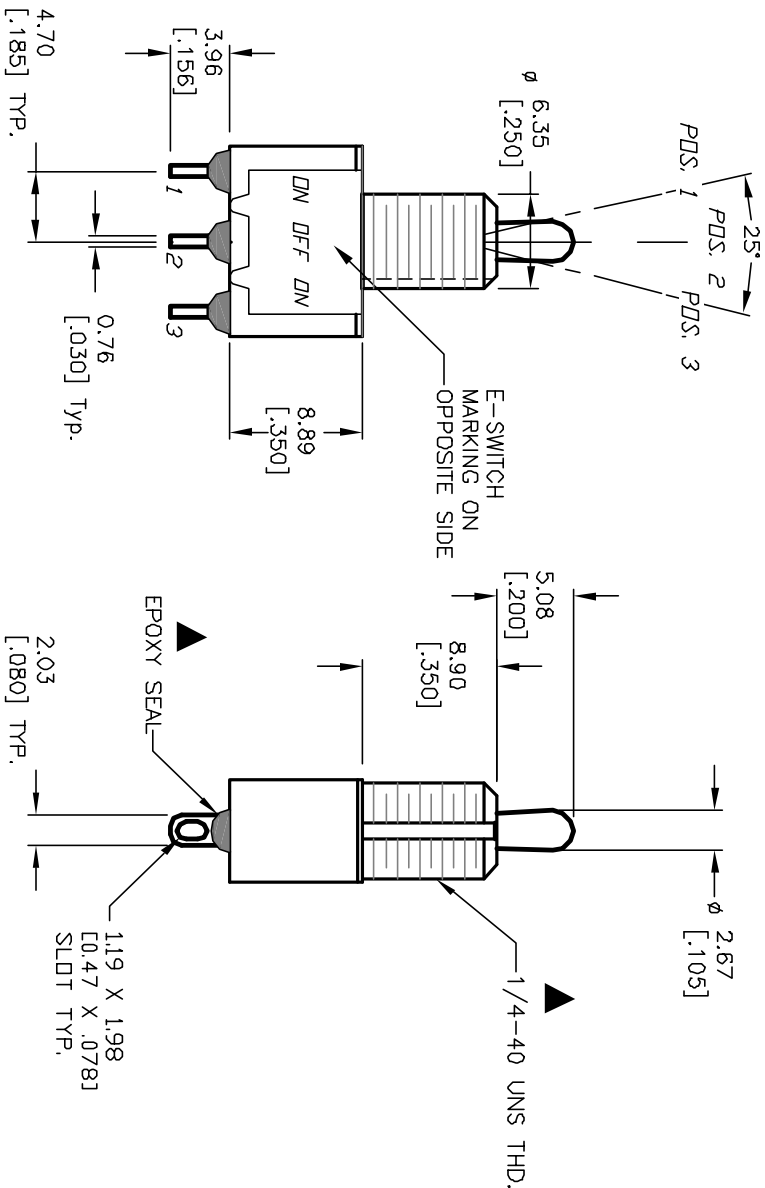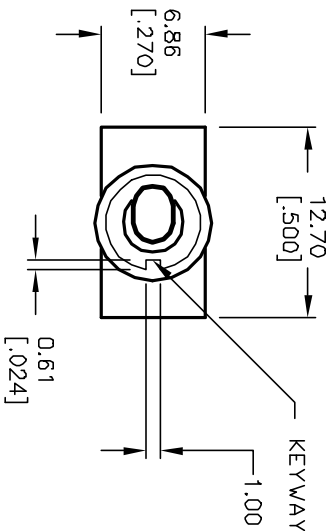

A	12166	RELEASED FOR PRODUCTION	5/20/02	CJB			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
TITLE				100 SP-4 T2 B1 M1 Q E			
SCALE				2:1			
DATE				5/20/02			
DR				CJB			
DWG				T114028			
REV				A			

E-SWITCH®