






RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPD1

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
(DN)	DIFF	(DN)	
2-3	OPEN	2-1	

$\langle \rangle =$ Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA max @20VAC or DC.
5. FIXED TERMINAL/MOVING CONTACT:
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C
10. HARDWARE SUPPLIED

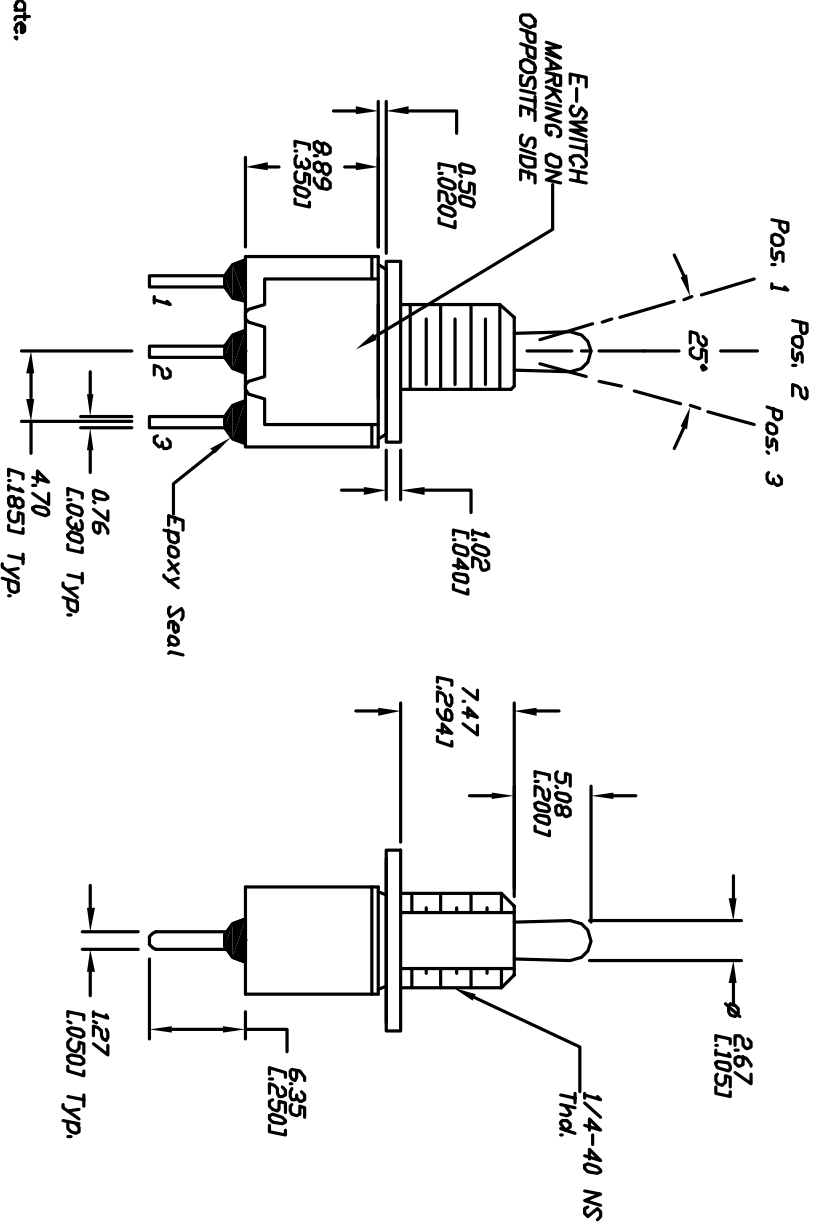**E-SWITCH®**

9. OPERATING TEMP.: 30°C to +85°C ▲ 10. HARDWARE SUPPLIED			
A	12353	RELEASED FOR PRODUCTION	8/6/02 CB
REV.	ECN NO.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED			
E-SWITCH®			
TITLE			
100 SP-4 T2 B9 M2 R E (W/Ext. D Ring)			
SCALE	DATE	DR	DWG
2:1	8/6/02	CB	T114037
			REV A