
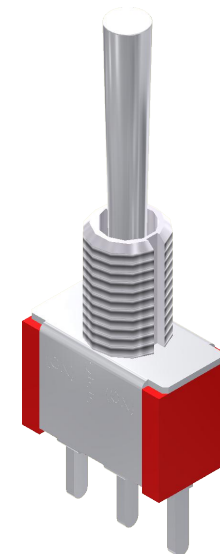


RECOMMENDED PANEL MOUNTING




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
(ON)	OFF	(ON)
2-3	OPEN	2-1


() = DENOTES MOMENTARY

NOTE:



1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC
5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK
 - T100011 - LOCK WASHER - QTY 1
 - T100015 - LOCK RING - QTY 1
 - T100000 - HEX NUT - QTY 2



RECOMMENDED P.C.B MOUNTING



CIRCUIT: SPDT

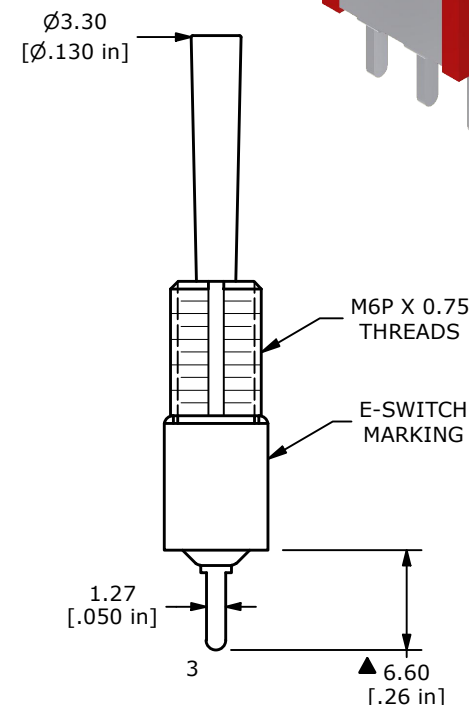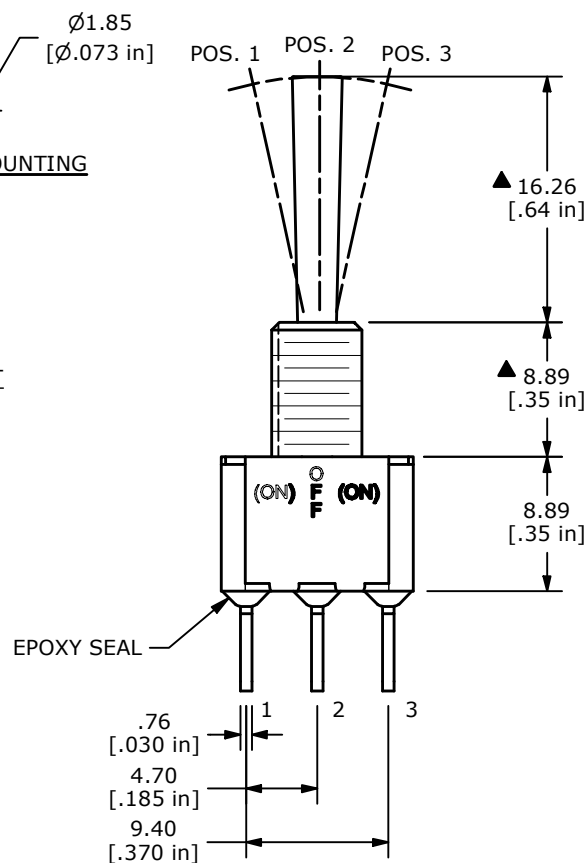

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-102119	100 SERIES UPDATE	08/01/23	MR						000023053
					TITLE 100SP4T4B8M2QEH					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 5/2/2007	DR TN	DWG ST114061	REV B	