


RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(DN)	DEF	(DN)
2-3	OPEN	2-1

< >= MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. FIXED TERM. & MOVING CONTACT;
Copper ALLOY W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

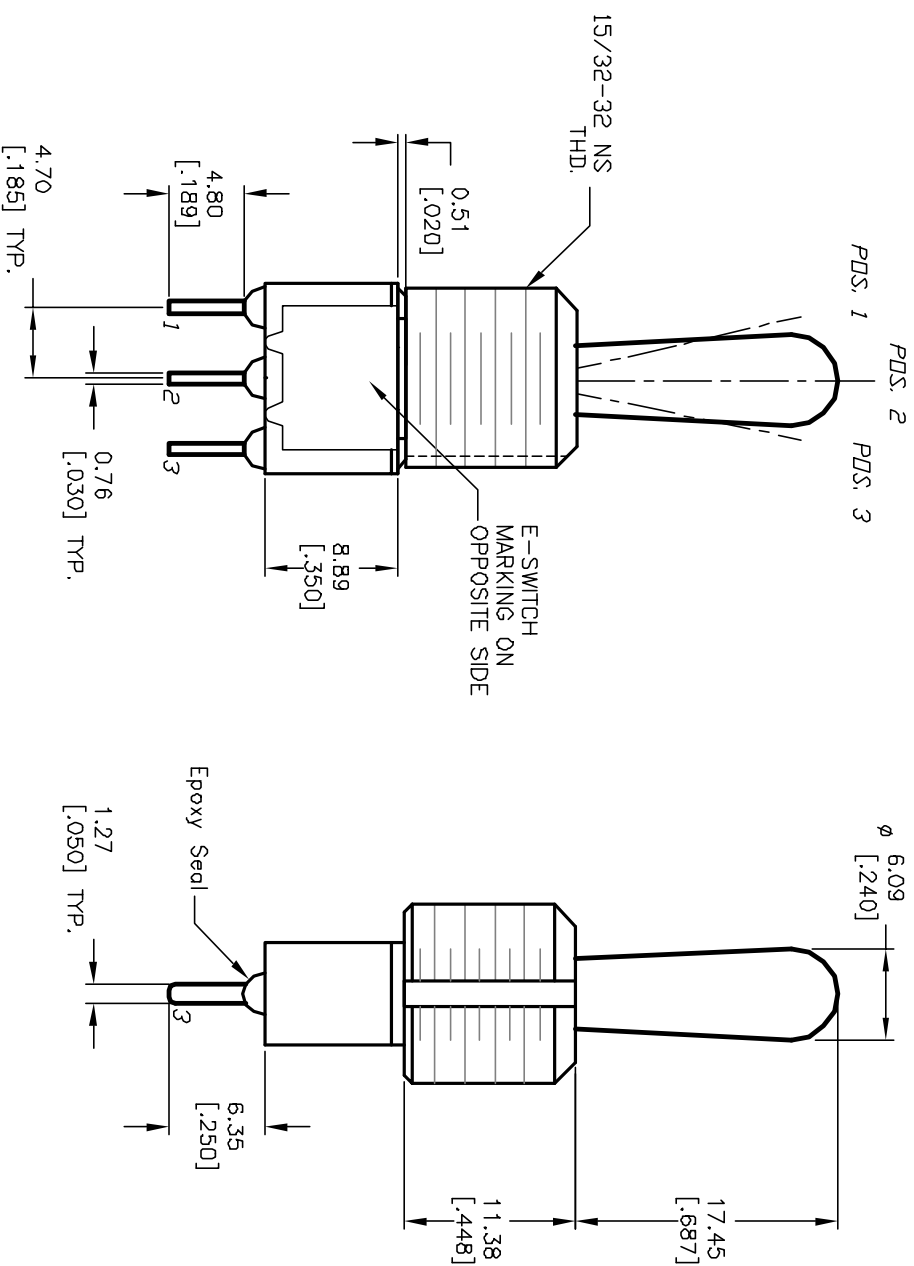**E-SWITCH®**

			TITLE			
			100 SP-4 T8 B13 M2 Q E			
B	11219	ADD NOTES				
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
SCALE			DATE	DR	DWG	REV
2:1			9/02/98	MM	T114031	B