




P.C. MOUNTING

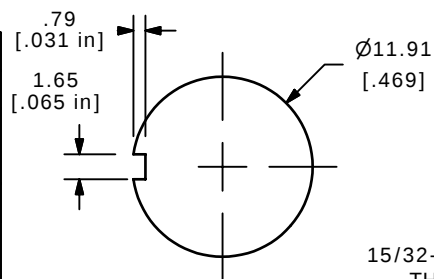

CIRCUIT: SPDT



PANEL MOUNTING

SWITCH FUNCTION		
POS. 1	POS. 1	POS. 1
(ON)	OFF	(ON)
2-3	OPEN	2-1

(ON)=MOMENTARY




15/32-32 UNS-2A
THREADSE-SWITCH
MARKING ON
OPPOSITE SIDE

EPOXY SEAL

4.70
[.185 in]

1 2 3

.76
[.030 in]

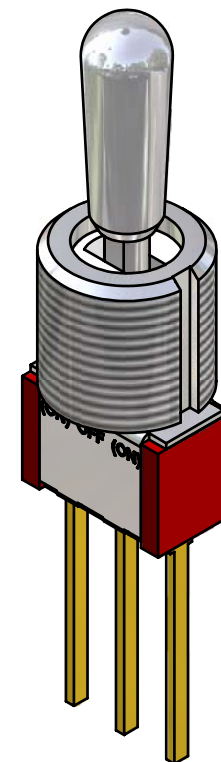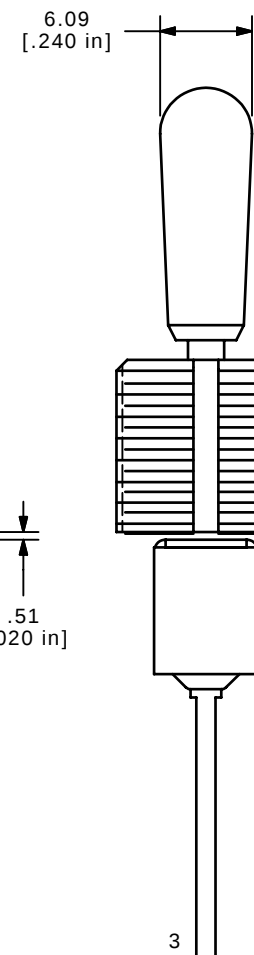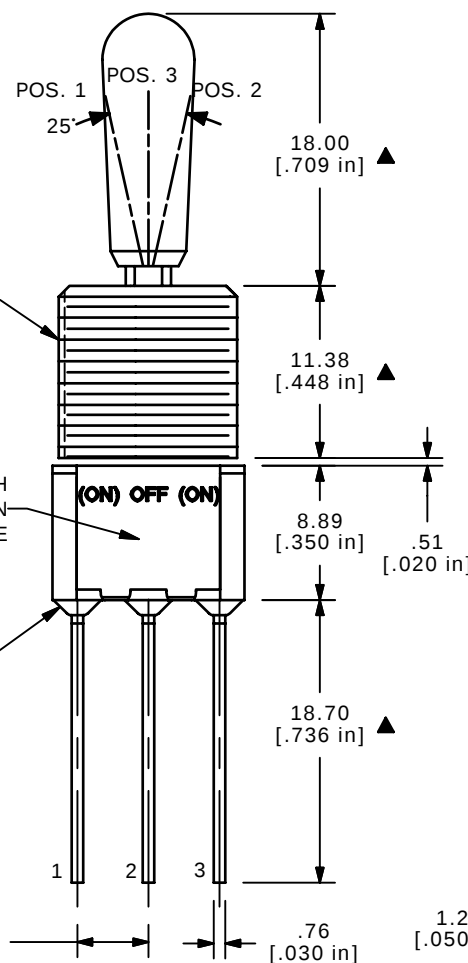

ISOMETRIC

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) Max. @20V Max.
6. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

B	16166	UPDATE DWG TO CURRENT STANDARDS	6/20/06	CT
A	14233	RELEASED FOR PRODUCTION	8/16/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100SP4T8B13M51RE

SCALE
2:1DATE
8/16/2004DR
ARDWG
T114042REV
B