



P.C. MOUNTING

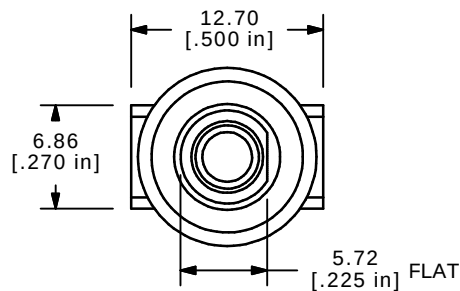

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1


(ON) = MOMENTARY




CIRCUIT: SPDT

NOTE:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS W/RESISTIVE LOAD @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

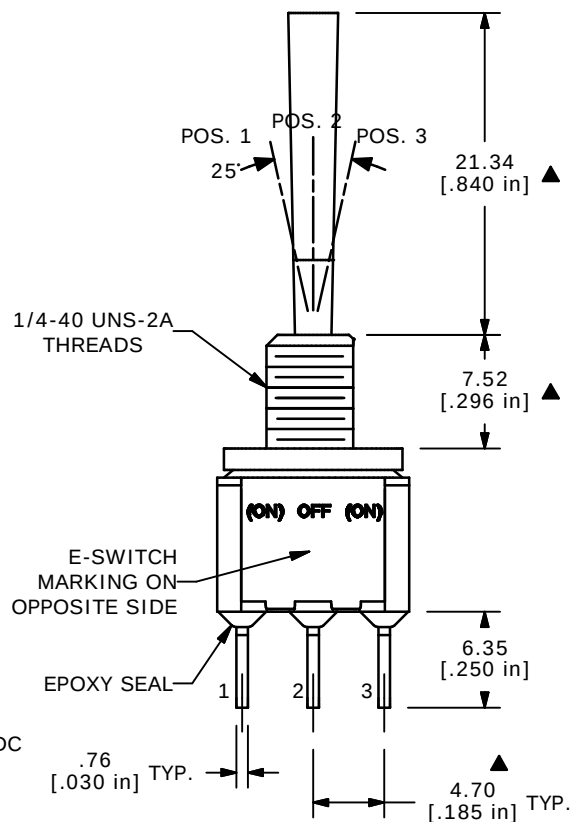Ø3.28
[.129 in]GLOSS FINISH
PLASTIC

CHROME FINISH

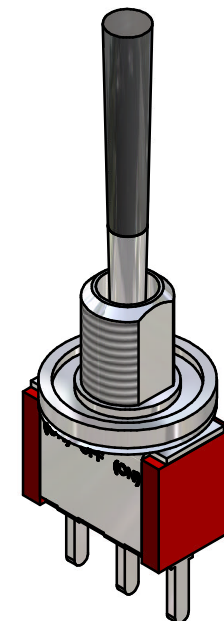

ISOMETRIC

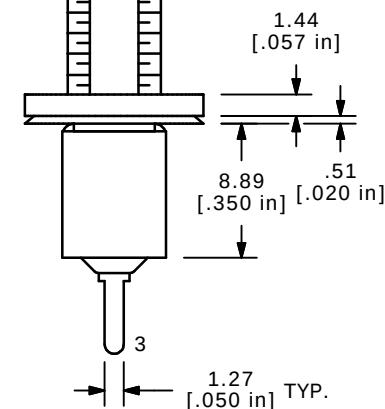**E-SWITCH®**

TITLE 100SP4T9B9M2QE

SCALE
2:1DATE
10/15/04DR
ARDWG
T114009REV
ATHE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	14407	RELEASED FOR PRODUCTION	10/15/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY