

P.C. MOUNTING




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	(ON)
2-3	OPEN	2-1

(ON) = MOMENTARY


Diagram of a SPDT switch with ports 1, 2, and 3. Port 1 is connected to port 2.

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4 VOLT AMPS (VA) MAX @ 20 VOLTS AC OR DC
6. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲DENOTES CRITICAL PARAMETER.

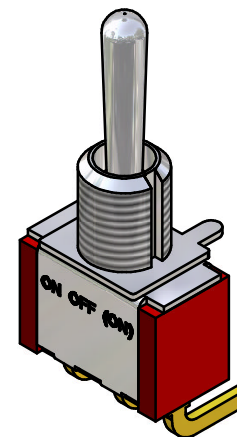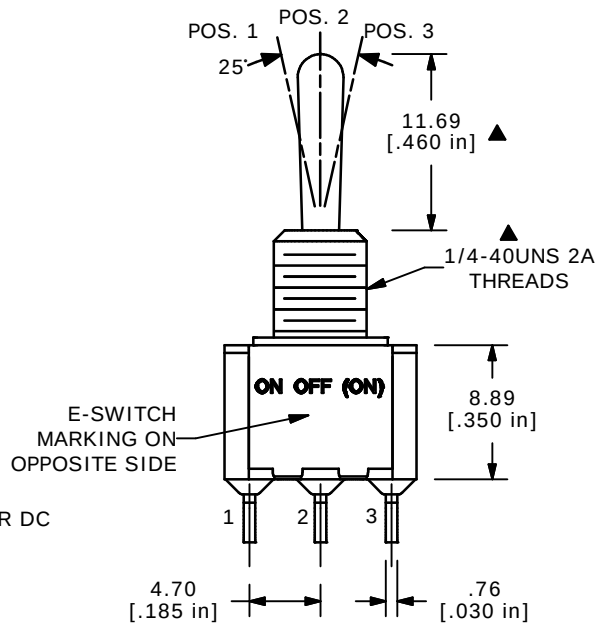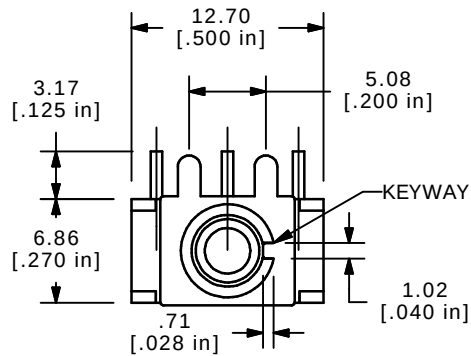

ISOMETRIC

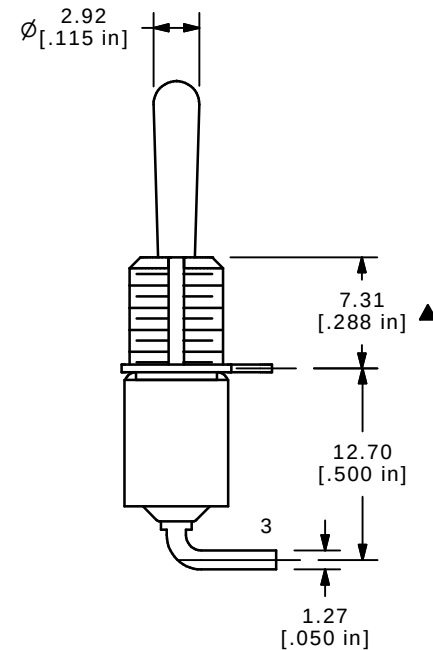

B	14279	CORRECT FUNCTION CHART POSITION #	9/1/04	AR
A	14037	RELEASED FOR PRODUCTION	6/9/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

***E-SWITCH*®**

TITLE 100SP5T1B3M6RE

SCALE 2:1

DATE 6/9/04

DR	AR
----	----

DWG T115009

REV
B