


WITHOUT LOCKING RING
PANEL MOUNTING

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
ON	OFF	(ON)	
2-3	OPEN	2-1	



(ON)=MOMENTARY




CIRCUIT: SPDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: GOLD
- RATING: 0.4VA MAX @20VAC OR VDC
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

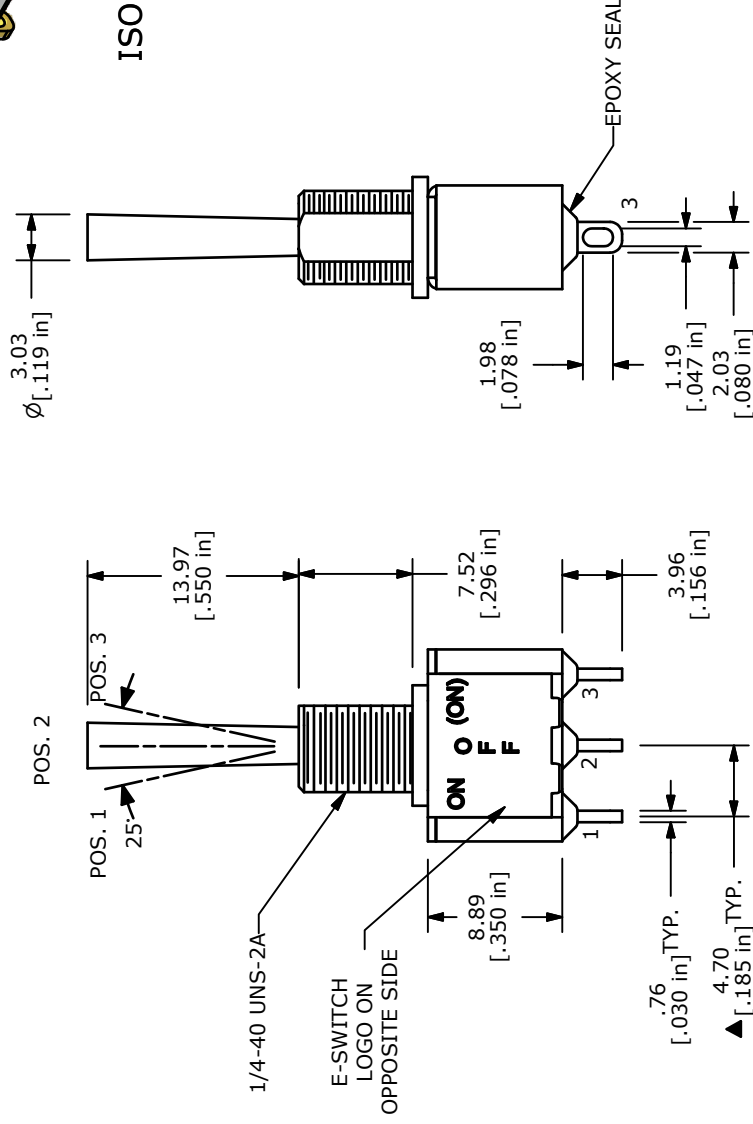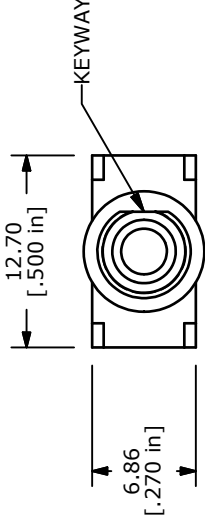

ISOMETRIC

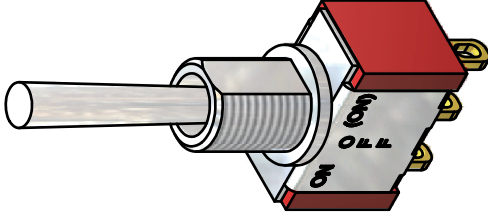

TITLE 100SP5T3B5M1RE

A	19581	RELEASE TO PRODUCTION	1/13/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE 2:1

DATE 1/13/2011

DR BGL

DWG T110071

REV A