

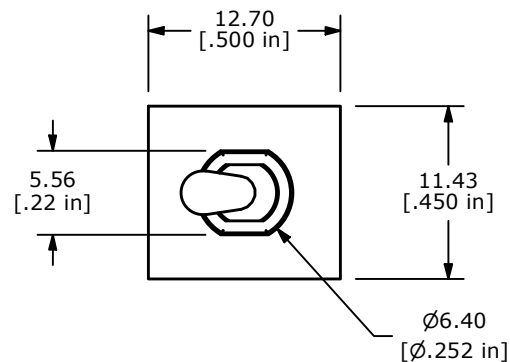


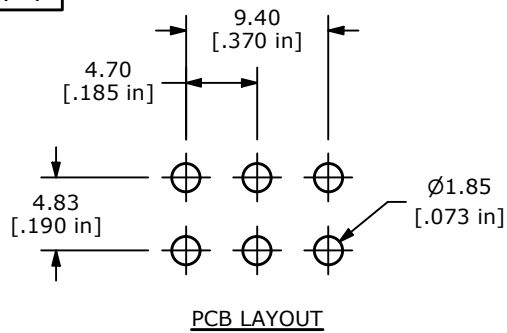



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4



CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5A @ 120VAC (or 28 VDC)
2A @ 250VAC
6. MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES
7. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. CONTACT RESISTANCE: 10 Milli-OHMS Max.
10. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
11. OPERATING TEMP.: -40°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.

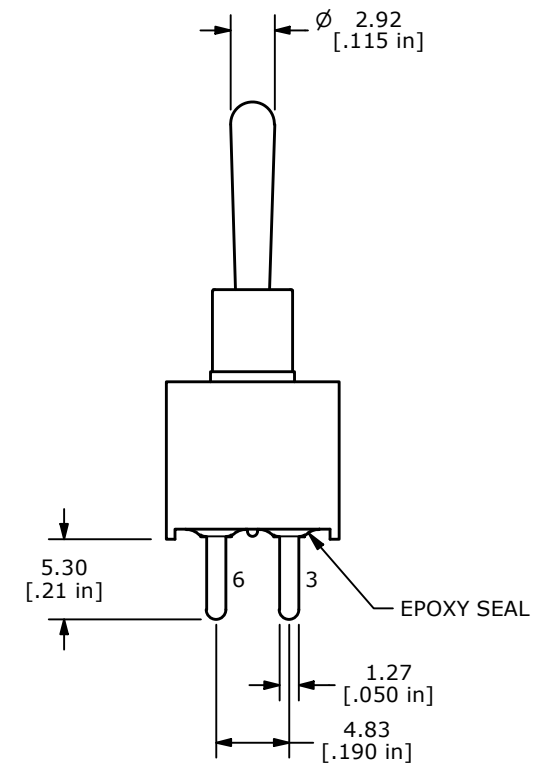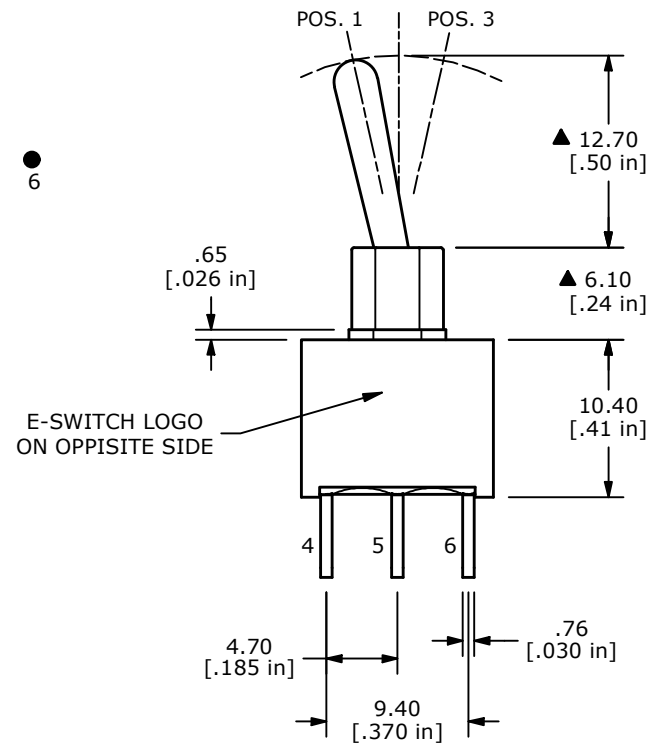

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
D	ECO-103540	print update	07/17/25	MW	TITLE 100AWDP1T1B4M2QE				000023710
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 6/22/1999	DR MM	DWG T102104	REV D