

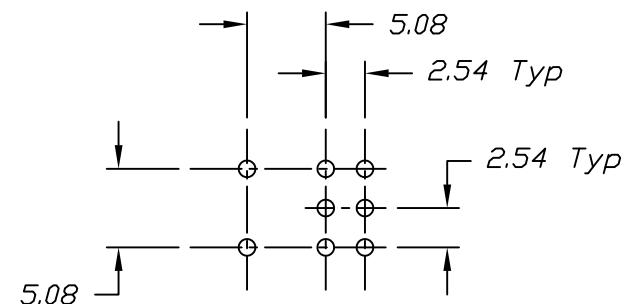
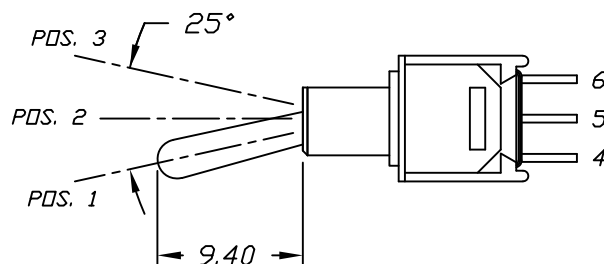
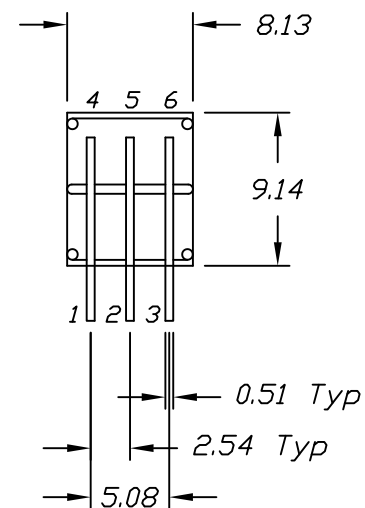


CIRCUIT: DPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |        |         |
|-----------------|--------|---------|
| PDS. 1          | PDS. 2 | PDS. 3  |
| ON              | NONE   | ON      |
| 2-3,5-6         | OPEN   | 2-1,5-4 |

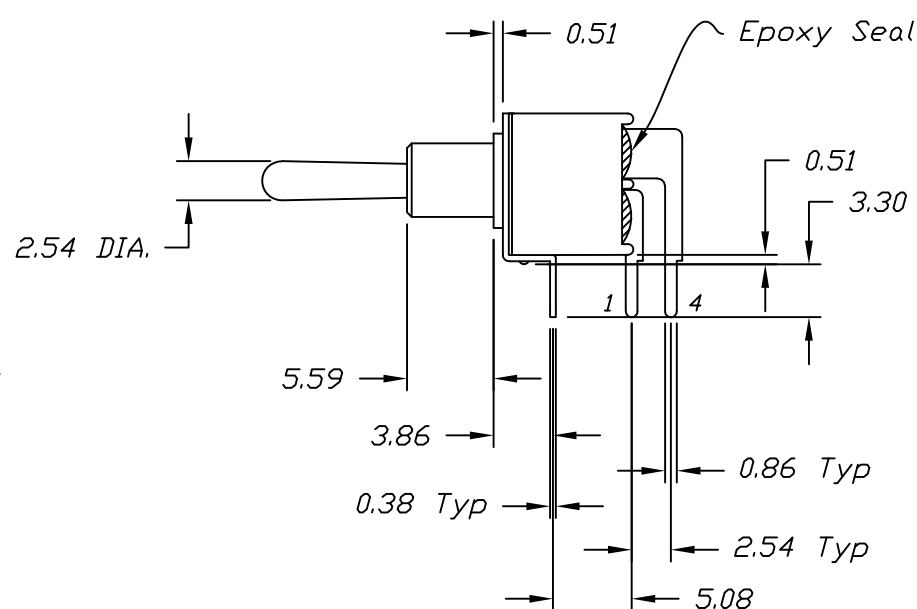

RECOMMEND P.C.B. LAYOUT

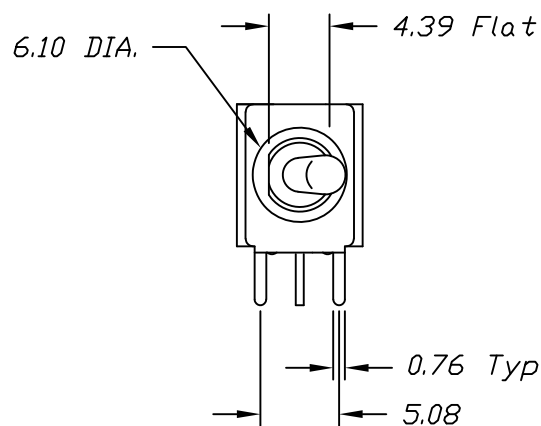

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE:  $0.0 \pm 0.4$   
 $0.00 \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3 Amps @120 VAC or 28 VDC;  
1 Amp @250 VAC.
5. ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
6. INSULATION RESISTANCE: 1,000M Ohms min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.:  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

**E-SWITCH**

TITLE

200 MDP-1 T1 B2 M6 Q E

|      |         |                         |         |      |
|------|---------|-------------------------|---------|------|
| A    | 10571   | RELEASED FOR PRODUCTION | 3/17/00 | MM   |
| REV. | ECN No. | DESCRIPTION             | DATE    | CHKD |

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

SCALE

2:1

DATE

3/17/00

DR

MM

DWG

T221009

REV

A