

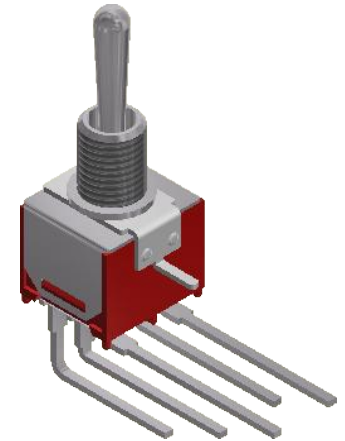
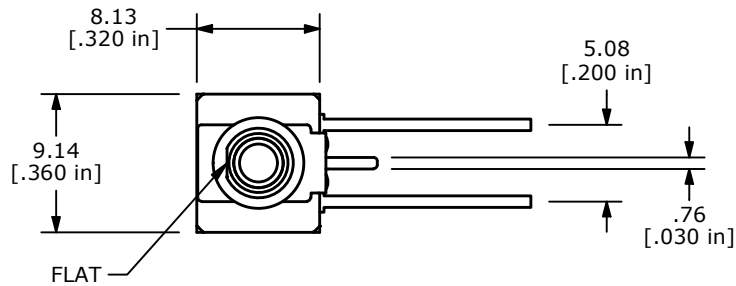



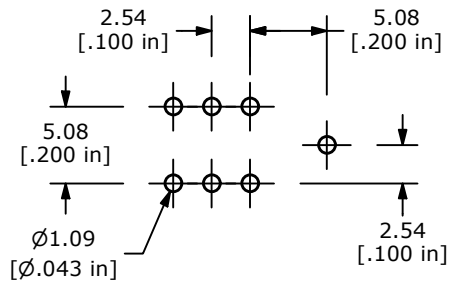


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 3A @ 120VAC OR 28VDC
1A @ 250VAC
- ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- HARDWARE TO BE SHIPPED BULK:
T200000 - LOCK WASHER (1)
T200002 - LOCK RING (1)
T200001 - HEX NUT (2)

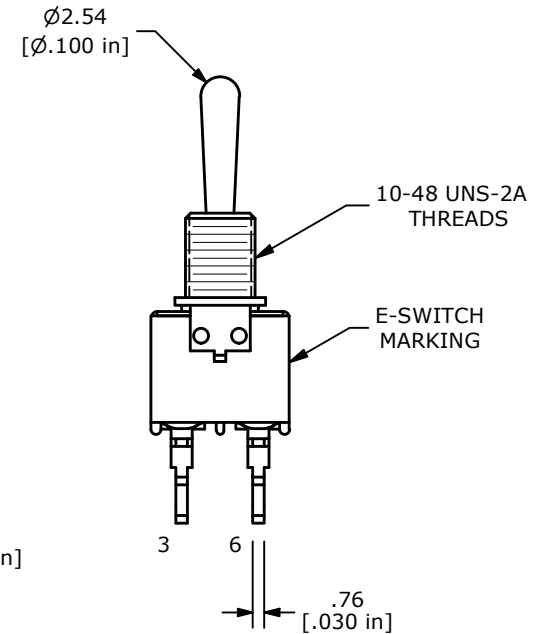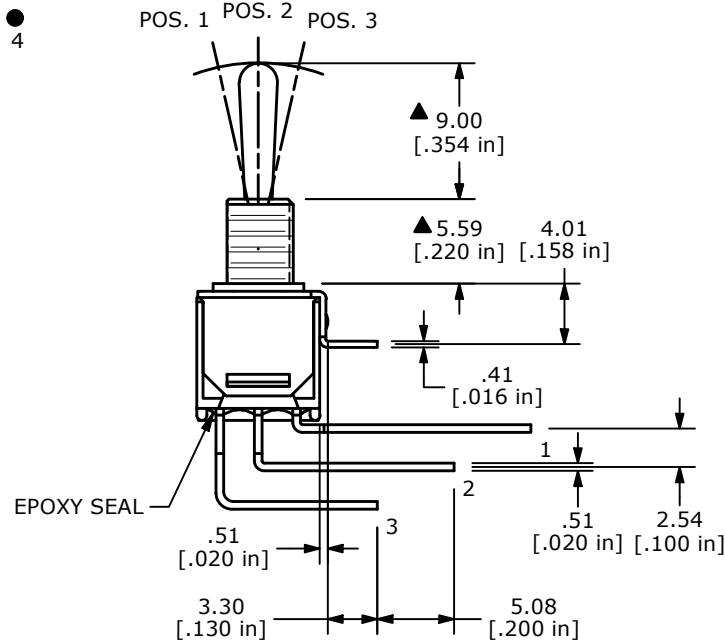

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101839	DIMENSION FROM 9.40 TO 9.00	04/19/23	MR	TITLE 200MDP3T1B1M7QEH				000023334
B	ECO-101794	B1 ROTATION UPDATE	04/04/23	MR					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 8/22/2006	DR BO	DWG ST223001	REV C